

# eUICC Profile Package: Interoperable Format Test Specification

Version 3.3.1.2

February 2025

**Copyright © 2025 Trusted Connectivity Alliance Ltd.**

The information contained in this document may be used, disclosed and reproduced without the prior written authorization of Trusted Connectivity Alliance. Readers are advised that Trusted Connectivity Alliance reserves the right to amend and update this document without prior notice. Updated versions will be published on the Trusted Connectivity Alliance website at <http://www.trustedconnectivityalliance.org>

**Intellectual Property Rights (IPR) Disclaimer**

Attention is drawn to the possibility that some of the elements of any material available for download from the specification pages on Trusted Connectivity Alliance's website may be the subject of Intellectual Property Rights (IPR) of third parties, some, but not all, of which are identified below. Trusted Connectivity Alliance shall not be held responsible for identifying any or all such IPR, and has made no inquiry into the possible existence of any such IPR. TRUSTED CONNECTIVITY ALLIANCE SPECIFICATIONS ARE OFFERED WITHOUT ANY WARRANTY WHATSOEVER, AND IN PARTICULAR, ANY WARRANTY OF NON- INFRINGEMENT IS EXPRESSLY DISCLAIMED. ANY IMPLEMENTATION OF ANY TRUSTED CONNECTIVITY ALLIANCE SPECIFICATION SHALL BE MADE ENTIRELY AT THE IMPLEMENTER'S OWN RISK, AND NEITHER TRUSTED CONNECTIVITY ALLIANCE, NOR ANY OF ITS MEMBERS OR SUBMITTERS, SHALL HAVE ANY LIABILITY WHATSOEVER TO ANY IMPLEMENTER OR THIRD PARTY FOR ANY DAMAGES OF ANY NATURE WHATSOEVER DIRECTLY OR INDIRECTLY ARISING FROM THE IMPLEMENTATION OF ANY TRUSTED CONNECTIVITY ALLIANCE SPECIFICATION.

# Table of Contents

<b>1. Objective .....</b>	<b>16</b>
<b>2. Introduction .....</b>	<b>16</b>
<b>3. References .....</b>	<b>17</b>
3.1 Normative References .....	17
3.2 Informative References .....	18
<b>4. Abbreviations .....</b>	<b>19</b>
<b>5. Definitions .....</b>	<b>20</b>
<b>6. Test environment .....</b>	<b>22</b>
6.1 Table of optional features.....	22
6.1.1 Information <b>to be provided by the Supplier</b> .....	25
6.2 Applicability table .....	26
6.3 Optional features and applicability tables formatting .....	43
6.3.1 Format of the table of optional features.....	43
6.3.2 Format of the applicability table .....	43
6.3.3 Status and Notations.....	43
6.4 Test environment description .....	44
6.5 Test equipment.....	44
6.5.1 eIM Configuration.....	44
6.6 Test execution .....	45
6.6.1 General Initial Conditions .....	45
6.6.1.1. M2M Architecture .....	45
6.6.1.2. Consumer Device, or IoT Architecture.....	46
6.6.2 General Post Conditions .....	48
6.6.3 SCP80.....	48
6.6.4 Specific rules for FCP verification .....	48
6.6.4.1. Tag 'A5' .....	49
6.6.4.2. Tag DO '88' (SFI) .....	49
6.6.4.3. Files created based on a PE Template.....	50
6.6.4.4. Verify that all the files are created .....	50
6.6.4.5. Tag '82' (File Descriptor) .....	50
6.6.4.6. Tag 'C6' (PIN Status Template DO).....	51
6.6.4.7. EF (UMPC) .....	51

6.6.4.8	Tag '80' .....	51
6.6.5	Specific rules for file content verification .....	51
6.6.5.1.	Files created based on a PE Template .....	51
6.6.5.2.	BER-TLV files created without TLV content.....	51
6.6.5.3.	PIN Verification .....	51
6.6.6	Specific rules for checking the returned status.....	51
6.6.7	ISO interface .....	52
6.6.8	Specific rules for checking the returned tags of GET STATUS command .....	52
6.6.9	Specific rules for checking the length of the statusMessage field .....	52
6.6.10	Specific rules for checking the offset field .....	52
6.7	Pass criterion.....	52
6.8	VOID.....	52
6.9	eUICC Initialisation Procedures .....	53
6.10	Profile loading.....	55
6.11	Profile enabling .....	55
6.12	Profile disabling .....	55
6.13	Profile deleting.....	55
6.14	Test PE description .....	56
6.14.1	Profile Header .....	58
6.14.1.1.	Profile-Header-1 .....	58
6.14.1.2.	Profile-Header-2.....	58
6.14.1.3.	Profile-Header-3.....	59
6.14.1.4.	Profile-Header-4.....	59
6.14.1.5.	Profile-Header-5.....	59
6.14.1.6.	Profile-Header-6.....	60
6.14.1.7.	Profile-Header-7 .....	60
6.14.1.8.	Profile-Header-8.....	61
6.14.1.9.	Profile-Header-9.....	61
6.14.1.10.	Profile-Header-10 .....	62
6.14.1.11.	Profile-Header-11 .....	62
6.14.1.12.	Profile-Header-12 .....	62
6.14.1.13.	Profile-Header-13 .....	63
6.14.1.14.	Profile-Header-14 .....	63
6.14.1.15.	Profile-Header-15 .....	64
6.14.1.16.	Profile-Header-16 .....	64
6.14.1.17.	Profile-Header-17 .....	65
6.14.1.18.	Profile-Header-18 .....	65
6.14.1.19.	Profile-Header-19 .....	66
6.14.1.20.	Profile-Header-20 .....	66

---

6.14.1.21.	Profile-Header-21 .....	67
6.14.1.22.	Profile-Header-22 .....	67
6.14.1.23.	Profile-Header-23 .....	68
6.14.1.24.	Profile-Header-24 .....	68
6.14.1.25.	Profile-Header-25 .....	69
6.14.1.26.	Profile-Header-26 .....	69
6.14.1.27.	Profile-Header-27 .....	70
6.14.1.28.	Profile-Header-1-v3 .....	70
6.14.1.29.	Profile-Header-2-v3 .....	71
6.14.1.30.	Profile-Header-3-v3 .....	71
6.14.1.31.	Profile-Header-4-v3 .....	71
6.14.1.32.	Profile-Header-5-v3 .....	71
6.14.1.33.	Profile-Header-6-v3 .....	71
6.14.1.34.	Profile-Header-7-v3 .....	71
6.14.1.35.	Profile-Header-8-v3 .....	72
6.14.1.36.	Profile-Header-9-v3 .....	72
6.14.1.37.	Profile-Header-10-v3 .....	72
6.14.1.38.	Profile-Header-11-v3 .....	72
6.14.1.39.	Profile-Header-12-v3 .....	72
6.14.1.40.	Profile-Header-13-v3 .....	72
6.14.1.41.	Profile-Header-14-v3 .....	72
6.14.1.42.	Profile-Header-15-v3 .....	73
6.14.1.43.	Profile-Header-16-v3 .....	73
6.14.1.44.	Profile-Header-17-v3 .....	73
6.14.1.45.	Profile-Header-18-v3 .....	73
6.14.1.46.	Profile-Header-19-v3 .....	73
6.14.1.47.	Profile-Header-20-v3 .....	73
6.14.1.48.	Profile-Header-21-v3 .....	74
6.14.1.49.	Profile-Header-22-v3 .....	74
6.14.1.50.	Profile-Header-23-v3 .....	74
6.14.1.51.	Profile-Header-24-v3 .....	74
6.14.1.52.	Profile-Header-25-v3 .....	74
6.14.1.53.	Profile-Header-26-v3 .....	75
6.14.1.54.	Profile-Header-27-v3 .....	75
6.14.1.55.	Profile-Header-28 .....	75
6.14.1.56.	Profile-Header-28-v3 .....	75
6.14.1.57.	Profile-Header-29-v3 .....	75
6.14.1.58.	Profile-Header-30-v3 .....	76

---

6.14.1.59.	Profile-Header-31 .....	76
6.14.1.60.	Profile-Header-31-v3 .....	76
6.14.1.61.	Profile-Header-32 .....	77
6.14.1.62.	Profile-Header-32-v3 .....	78
6.14.1.63.	Profile-Header-33-v3 .....	78
6.14.1.64.	Profile-Header-34-v3 .....	79
6.14.1.65.	Profile-Header-35-v3 .....	79
6.14.1.66.	Profile-Header-36-v3 .....	79
6.14.1.67.	Profile-Header-37-v3 .....	80
<b>6.14.2</b>	<b>File System .....</b>	<b>81</b>
6.14.2.1.	MF .....	81
6.14.2.2.	DF-CD .....	100
6.14.2.3.	DF-TELECOM .....	103
6.14.2.4.	CUSTOM .....	123
6.14.2.5.	DF-EAP .....	132
<b>6.14.3</b>	<b>PE-PUKCodes .....</b>	<b>134</b>
6.14.3.1.	PE-PUKCodes-1 .....	134
6.14.3.2.	PE-PUKCodes-2 .....	134
<b>6.14.4</b>	<b>PE-PINCodes .....</b>	<b>134</b>
6.14.4.1.	PE-PINCodes-1 .....	134
6.14.4.2.	PE-PINCodes-2 .....	135
6.14.4.3.	PE-PINCodes-3 .....	135
6.14.4.4.	PE-PINCodes-4 .....	136
<b>6.14.5</b>	<b>USIM ADF .....</b>	<b>137</b>
6.14.5.1.	USIM .....	137
6.14.5.2.	OPT-USIM .....	156
6.14.5.3.	DF-GSM_ACCESS .....	181
6.14.5.4.	DF-Phonebook .....	182
6.14.5.5.	DF-5GS .....	185
6.14.5.6.	DF-SAIP .....	190
6.14.5.7.	DF-SNPN .....	193
6.14.5.8.	DF-5G-PROSE .....	193
<b>6.14.6</b>	<b>ISIM ADF .....</b>	<b>194</b>
6.14.6.1.	ISIM .....	194
6.14.6.2.	OPT-ISIM .....	197
<b>6.14.7</b>	<b>CSIM ADF .....</b>	<b>202</b>
6.14.7.1.	CSIM .....	202
6.14.7.2.	OPT-CSIM .....	207

---

6.14.8	PE-PINCodes (Local PIN).....	209
6.14.8.1.	PE-PINCodes-Local-PIN-1 .....	209
6.14.8.2.	PE-PINCodes-Local-PIN-2 .....	209
6.14.8.3.	PE-PINCodes-Local-PIN-3 .....	210
6.14.8.4.	PE-PINCodes-Local-PIN-4 .....	210
6.14.8.5.	PE-PINCodes-Local-PIN-5 .....	211
6.14.8.6.	PE-PINCodes-Local-PIN-6 .....	211
6.14.8.7.	PE-PINCodes-Local-PIN-7 .....	211
6.14.9	PE-AKA Parameters .....	212
6.14.9.1.	PE-AKAParameters-1 .....	212
6.14.9.2.	PE-AKAParameters-2 .....	212
6.14.9.3.	PE-AKAParameters-3 .....	213
6.14.9.4.	PE-CDMAParameters-1 .....	213
6.14.9.5.	PE-AKAParameters-4 .....	214
6.14.9.6.	PE-AKAParameters-5 .....	214
6.14.9.7.	PE-AKAParameters-6 .....	215
6.14.9.8.	PE-AKAParameters-7 .....	215
6.14.9.9.	PE-AKAParameters-8 .....	216
6.14.9.10.	PE-AKAParameters-9 .....	216
6.14.9.11.	PE-AKAParameters-10 .....	217
6.14.9.12.	PE-AKAParameters-11 .....	218
6.14.9.13.	PE-AKAParameters-12 .....	218
6.14.9.14.	PE-AKAParameters-13 .....	219
6.14.9.15.	PE-AKAParameters-14 .....	219
6.14.9.16.	PE-AKAParameters-15 .....	220
6.14.9.17.	PE-CDMAParameters-2.....	220
6.14.10	PE-SecurityDomain (MNO SD) .....	221
6.14.10.1.	PE-SecurityDomain-MNO-SD-1 .....	221
6.14.10.2.	VOID .....	222
6.14.10.3.	PE-SecurityDomain-MNO-SD-3 .....	222
6.14.10.4.	PE-SecurityDomain-MNO-SD-4 .....	223
6.14.10.5.	PE-SecurityDomain-MNO-SD-5 .....	225
6.14.10.6.	VOID .....	227
6.14.10.7.	PE-SecurityDomain-MNO-SD-7 .....	227
6.14.10.8.	PE-SecurityDomain-MNO-SD-8 .....	229
6.14.10.9.	PE-SecurityDomain-MNO-SD-9 .....	231
6.14.10.10.	PE-SecurityDomain-MNO-SD-10 .....	232
6.14.10.11.	PE-SecurityDomain-MNO-SD-11 .....	234

---

6.14.11	PE-SecurityDomain (SSD, CASD) .....	235
6.14.11.1.	PE-SecurityDomain-SSD-1 .....	235
6.14.11.2.	PE-SecurityDomain-SSD-2 .....	236
6.14.11.3.	VOID .....	237
6.14.11.4.	PE-SecurityDomain-SSD-3 .....	237
6.14.11.5.	PE-SecurityDomain-SSD-4 .....	238
6.14.11.6.	VOID .....	238
6.14.11.7.	PE-SecurityDomain-SSD-5 .....	239
6.14.11.8.	PE-SecurityDomain-SSD-6 .....	240
6.14.11.9.	PE-SecurityDomain-SSD-7 .....	241
6.14.11.10.	PE-SecurityDomain-SSD-8 .....	244
6.14.11.11.	PE-SecurityDomain-SSD-9 .....	247
6.14.11.12.	PE-SecurityDomain-SSD-10 .....	250
6.14.12	PE-Application .....	251
6.14.12.1.	PE-Application-1.....	251
6.14.12.2.	PE-Application-2.....	252
6.14.12.3.	PE-Application-3.....	253
6.14.12.4.	PE-Application-4.....	254
6.14.12.5.	PE-Application-5.....	255
6.14.12.6.	PE-Application-6.....	256
6.14.12.7.	PE-Application-7.....	257
6.14.12.8.	PE-Application-8.....	258
6.14.12.9.	PE-Application-9.....	259
6.14.12.10.	PE-Application-10.....	260
6.14.12.11.	PE-Application-11.....	261
6.14.12.12.	PE-Application-12.....	262
6.14.12.13.	PE-Application-13.....	263
6.14.12.14.	PE-Application-14.....	264
6.14.12.15.	PE-Application-15.....	265
6.14.12.16.	PE-Application-16.....	266
6.14.12.17.	PE-Application-17.....	267
6.14.12.18.	PE-Application-18.....	268
6.14.13	PE-RFM .....	269
6.14.13.1.	PE-RFM-1 .....	269
6.14.13.2.	PE-RFM-2 .....	269
6.14.13.3.	PE-RFM-ISIM .....	269
6.14.13.4.	PE-RFM-CSIM .....	270
6.14.13.5.	PE-RFM-3 .....	271



6.14.13.6.	PE-RFM-4 .....	271
6.14.13.7.	PE-RFM-5 .....	271
6.14.14	PE-End.....	272
6.14.14.1.	PE-END-1 .....	272
6.14.15	PE-NonStandard.....	272
6.14.15.1.	PE-NonStandard-1 .....	272
6.14.15.2.	PE-NonStandard-2 .....	272
6.14.16	IoT Minimal Profile Header.....	273
6.14.16.1.	IoT-Minimal-Profile-Header-1 .....	273
6.14.17	PE-IoT .....	273
6.14.17.1.	PE-IoT-by-Template-1 .....	273
6.14.17.2.	PE-IoT-by-Template-2.....	273
6.14.17.3.	PE-IoT-by-Template-3.....	274
6.14.17.4.	PE-IoT-by-Template-4.....	277
6.14.17.5.	PE-IoT-by-Template-5.....	277
6.14.17.6.	PE-IoT-by-Template-6.....	278
6.14.17.7.	PE-IoT-by-Template-7 .....	278
6.14.18	PE-OPT-IoT .....	280
6.14.18.1.	PE-OPT-IoT-by-Template-1 .....	280
6.14.18.2.	PE-OPT-IoT-by-Template-2 .....	281
6.14.18.3.	PE-OPT-IoT-by-Template-3 .....	282
6.15	Profile Package definition.....	283
<b>7.</b>	<b>Profile Package General Structure .....</b>	<b>284</b>
7.1	Test requirements .....	284
7.2	Test cases / scenarios .....	284
<b>8.</b>	<b>Profile Package Elements Definition .....</b>	<b>285</b>
8.1	Test requirements .....	285
8.1.1	Common types.....	285
8.1.2	Profile header.....	287
8.1.3	File system.....	291
8.1.4	NAA(s) .....	293
8.1.5	PIN and PUK codes .....	295
8.1.6	Security domains .....	297
8.1.7	Application loading and installation .....	300
8.1.8	RFM Parameters.....	304
8.1.9	Non standardised content .....	304
8.1.10	Profile Package end.....	305
8.1.11	eUICC Response type .....	306

8.1.12	SUCI Calculation by USIM .....	316
8.2	Test cases / scenarios .....	318
8.2.1	Check Profile Format .....	318
8.2.1.1.	VOID .....	318
8.2.1.2.	Installing profile with PE-USIM before PE-MF, eUICC reports error. ....	318
8.2.1.3.	Installing profile with PE-Application before PE-SecurityDomain, eUICC reports error. ....	319
8.2.1.4.	Installing profile with PE-RFM before PE-SecurityDomain, eUICC reports error. ....	321
8.2.2	Check Profile Header .....	322
8.2.2.1.	Error when cat-tp in ServicesList and eUICC does not support CAT_TP .....	322
8.2.2.2.	Error when package in eUICC-Mandatory-AIDs is not known .....	324
8.2.2.3.	Error when version in eUICC-Mandatory-AIDs is not supported.....	325
8.2.2.4.	No error when package and version in eUICC-Mandatory-AIDs is known and supported.....	327
8.2.2.5.	No error when profileType is of maximum length (Latin symbols) .....	328
8.2.3	Check File System .....	330
8.2.3.1.	Installing USIM files by generic file management .....	330
8.2.3.2.	Installing USIM files by template.....	332
8.2.3.3.	Installing USIM files by template with OPT-USIM-2.....	334
8.2.3.4.	Installing USIM files by template with BER-TLV files in the ServicesList.....	338
8.2.3.5.	Error when installing PE-USIM when eUICC does not support USIM .....	340
8.2.3.6.	Warning when installing USIM files by template with BER-TLV files in a non mandatory PE when eUICC does not support BER-TLV .....	342
8.2.3.7.	Warning when creating a DF with dfLink in a non mandatory PE when eUICC does not support dfLink. ....	345
8.2.3.8.	VOID.....	346
8.2.3.9.	Creating a DF with dfLink when eUICC supports dfLink and dfLink is in ServicesList. ....	346
8.2.3.10.	Installing CSIM files by template .....	349
8.2.3.11.	Installing ISIM files by template .....	351
8.2.3.12.	Installing USIM files by template without content .....	355
8.2.3.13.	Creating file instances with and without explicitly set file ID .....	356
8.2.3.14.	Error when installing PE-CSIM when eUICC does not support CSIM .....	358
8.2.3.15.	Installing GSM-ACCESS files by template .....	359
8.2.3.16.	Installing USIM Phonebook files by template .....	362
8.2.3.17.	Installing EAP files by template .....	364
8.2.3.18.	Error when installing USIM files by template with BER-TLV files in a mandatory PE when eUICC does not support BER-TLV .....	366
8.2.3.19.	Installing USIM files by template using proprietaryEFInfo .....	367
8.2.3.20.	Installing profile with multiple FileManagement elements.....	368
8.2.3.21.	Installing multiple USIM by template .....	369
8.2.3.22.	Installing ISIM files by version2 template .....	373

8.2.3.23.	Installing TELECOM files by version2 template .....	375
8.2.3.24.	Creating a DF with linked EF.....	377
8.2.3.25.	Creating a EF using filePath.....	378
8.2.3.26.	Creating a EF using filePath of zero length .....	380
8.2.3.27.	Installing 5G files by template .....	382
8.2.3.28.	Installing 5G files by version2 template .....	384
8.2.3.29.	Installing OPT USIM files by version2 template .....	386
8.2.3.30.	Installing 5G files by version3 template with service 136 available .....	388
8.2.3.31.	Installing LTE Files within USIM and ISIM by template .....	389
8.2.3.32.	Installing 5G files by version4 template, SNPN and 5G PROSE files by template .....	393
8.2.3.33.	Installing OPT USIM files by version3 template .....	395
<b>8.2.4</b>	<b>Check NAA(s) .....</b>	<b>397</b>
8.2.4.1.	Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE .....	397
8.2.4.2.	Installing PE-AKAPParameters with TUAK and sending AUTHENTICATE .....	398
8.2.4.3.	Installing PE-AKAPParameters with usim-test-algorithm and sending AUTHENTICATE .....	399
8.2.4.4.	Installing PE-AKAPParameters with TUAK with 256 bit key and restricted length and sending AUTHENTICATE .....	400
8.2.4.5.	Installing PE-AKAPParameters with TUAK with 256 bit key and sending AUTHENTICATE.....	401
8.2.4.6.	Installing PE-AKAPParameters with TUAK with numberOfKeccak and restricted length sending AUTHENTICATE .....	403
8.2.4.7.	Installing PE-AKAPParameters with TUAK with numberOfKeccak and sending AUTHENTICATE ....	404
8.2.4.8.	Error when authCounterMax exceeded .....	405
8.2.4.9.	Test Milenage PIN verification and defined constants .....	408
8.2.4.10.	Blocked SQN with wrap around deactivated .....	409
8.2.4.11.	Testing SQN delta and age limit.....	410
8.2.4.12.	Test usim-test-algorithm with 32 bit RES length.....	412
8.2.4.13.	Installing PE-CDMAParameters and send COMPUTE IP AUTHENTICATE in Simple IP CHAP Mode 414	
8.2.4.14.	Installing PE-CDMAParameters and send COMPUTE IP AUTHENTICATE in HRPD Access Mode 415	
8.2.4.15.	Installing PE-CDMAParameters and send COMPUTE IP AUTHENTICATE in Mobile IP Mode ..	417
8.2.4.16.	Installing USIM and ISIM with sharing NAA parameters .....	419
8.2.4.17.	Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE in 2G mode .....	421
8.2.4.18.	Installing USIM and ISIM with shared SQN array.....	422
8.2.4.19.	Installing multiple PE-AKAPParameters with MILENAGE and TUAK and sending AUTHENTICATE 425	
8.2.4.20.	Installing PE-CDMAParameters with shortest Mobile IP authentication parameters .....	427
<b>8.2.5</b>	<b>Check PIN and PUK codes .....</b>	<b>429</b>
8.2.5.1.	Installing PINs in enabled state .....	429

8.2.5.2.	Installing PINs in disabled state.....	430
8.2.5.3.	Installing different PINs with different PUKs .....	431
8.2.5.4.	Checking the access domain validity of an RFM instance in case of a blocked PIN .....	432
8.2.5.5.	Checking the PIN context of a Global PIN .....	434
8.2.5.6.	Checking the PIN context of a Local PIN.....	436
8.2.5.7.	Checking the “PIN state change allowed” and “PIN state change not allowed” status .....	437
8.2.5.8.	Checking the “PIN can be changed” and “PIN cannot be changed” status.....	439
8.2.5.9.	Error when no consistency between pinStatusTemplateDO and PE PINCodes Local .....	441
8.2.5.10.	Checking Local PIN handling .....	442
8.2.5.11.	Checking the PIN context of a Local PIN .....	444
8.2.5.12.	Checking the update of Global PIN and ADM for IoT Minimal Profile.....	445
8.2.5.13.	Checking the update of Local PIN for IoT Minimal Profile .....	446
8.2.5.14.	Checking the default Global PIN1 for IoT Minimal Profile.....	447
8.2.5.15.	Checking the default Local PIN for IoT Minimal Profile .....	448
<b>8.2.6</b>	<b>Check Security Domains.....</b>	<b>450</b>
8.2.6.1.	Check mandatory elements in PE Security Domain .....	450
8.2.6.2.	Check key list in PE Security Domain.....	451
8.2.6.3.	Check number of keyComponent objects .....	453
8.2.6.4.	Check sdPersoData.....	454
8.2.6.5.	Check OTA HTTPs Personalisation .....	455
8.2.6.6.	VOID.....	456
8.2.6.7.	VOID.....	456
8.2.6.8.	Check installing an SSD under a self extradited SSD.....	457
8.2.6.9.	Check initial counter is default when keyCounterValue absent .....	458
8.2.6.10.	Error when installing KeyObject parameter not supported .....	460
8.2.6.11.	Check SCP parameters when both SCP80 and SCP02 is supported in SSD .....	461
8.2.6.12.	Check SCP parameters when SCP80 is supported in SSD .....	463
8.2.6.13.	Check LCS when no value is provided in lifeCycleState parameter.....	464
8.2.6.14.	Check OTA DNS Personalisation.....	466
8.2.6.15.	Check SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key	467
8.2.6.16.	Check failure of SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key	468
8.2.6.17.	Check installing PE Security Domain with specific load package and class AID-s.....	470
8.2.6.18.	Check processData for Security Domain.....	471
8.2.6.19.	Check Get Data returns correct SCP11-related parameters when SCP11 is supported in SSD..	473
8.2.6.20.	Check SCP11 parameters when SCP11c authorization mechanism is supported in SSD .....	474
8.2.6.21.	Check SCP11 parameters when S16 mode is supported in SSD .....	476

8.2.6.22.	Check PE-SD Installation when CumulativeGrantedMemory is supported .....	477
<b>8.2.7</b>	<b>Check Application loading and installation .....</b>	<b>478</b>
8.2.7.1.	Check Application PE and mandatory elements in ApplicationInstance .....	478
8.2.7.2.	Check all elements in ApplicationLoadPackage – taking size into account – PE application is mandatory 480	
8.2.7.3.	Check all elements in ApplicationInstance.....	481
8.2.7.4.	Error when loading an Application PE and bad library is provided .....	484
8.2.7.5.	Check multiple ApplicationInstance .....	485
8.2.7.6.	Check processData .....	488
8.2.7.7.	Error when loading Application PE and the lifecycle of SD is not PERSONALISED .....	490
8.2.7.8.	Check all elements in ApplicationLoadPackage – taking size into account – PE application is not mandatory 491	
8.2.7.9.	Check all elements in ApplicationInstance when eUICC supports tag list '5C' with tag 'CF' .....	492
8.2.7.10.	Check loaded libraries within a PE-Application .....	494
8.2.7.11.	Check PE-Application installation when Memory Management is supported. ....	495
8.2.7.12.	Installing profile with contactless eUICC Mandatory service selected and userInteractionContactlessParameters, eUICC reports error. ....	498
8.2.7.13.	Check the contactlessProtocolParameters (Type A Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected. ....	500
8.2.7.14.	Check Application PE loaded using the SHA-1 algorithm for the "hashValue" related to the loadBlockObject. ....	502
8.2.7.15.	Check Application PE installed setting the Additional Contactless Parameters (reader mode protocol data Type A) according to the ETSI TS 102.226. ....	504
8.2.7.16.	Check Application PE installed setting the SIM File Access and Toolkit Parameters according to ETSI TS 102.226.....	506
8.2.7.17.	Check Application PE installed setting UICC System Specific Parameters according to ETSI TS 102.226 508	
8.2.7.18.	Check the contactlessProtocolParameters (Type B Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected. ....	509
8.2.7.19.	Check the contactlessProtocolParameters (Type F Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected. ....	511
8.2.7.20.	Check Application PE installed setting the Additional Contactless Parameters (reader mode protocol data Type B) according to the ETSI TS 102.226. ....	513
<b>8.2.8</b>	<b>Check RFM parameters .....</b>	<b>516</b>
8.2.8.1.	Installing PE-RFM with adfRFMAccess .....	516
8.2.8.2.	Installing PE-RFM without adfRFMAccess .....	517
8.2.8.3.	Installing profile with two difference PE-RFMs.....	518
8.2.8.4.	Installing PE-RFM associated to SSD1 .....	519
<b>8.2.9</b>	<b>Check Non standardised content .....</b>	<b>521</b>
8.2.9.1.	No error when installing non mandatory PE-NonStandard .....	521
8.2.9.2.	Error when installing mandatory PE-NonStandard .....	522

8.2.9.3.	Warning when installing non mandatory PE-NonStandard .....	523
8.2.10	Check Profile Package end .....	524
8.2.11	Check eUICC Response .....	524
8.2.11.1.	Check unsupported major version .....	524
8.2.11.2.	Check unsupported template in Profile Header .....	525
8.2.11.3.	Check offset in eUICC Response with error .....	527
8.2.11.4.	Check unknown tag in Profile Package .....	528
8.2.11.5.	Warning if GBA not supported .....	529
8.2.11.6.	Warning if MBMS not supported .....	531
8.2.11.7.	Warning if GBA and MBMS not supported .....	533
8.2.11.8.	Error if GBA not supported .....	535
8.2.11.9.	Error if MBMS not supported .....	537
8.2.11.10.	Error if GBA and MBMS not supported .....	539
8.2.11.11.	No error if GBA and MBMS supported .....	541
8.2.11.12	Error when template version is not supported in a mandatory PE MF .....	542
8.2.11.13	Error when template version is not supported in a non-mandatory PE MF .....	543
8.2.11.14	Error when template version is not supported in a mandatory PE USIM .....	544
8.2.11.15	Warning when template version is not supported in a non-mandatory PE GSM ACCESS .....	546
8.2.12	Check SUCI Calculation by USIM .....	548
8.2.12.1.	SUCI Calculation by default system application – IMSI-based SUPI, Profile A .....	548
8.2.12.2.	SUCI Calculation by default system application – IMSI-based SUPI, Profile B .....	549
8.2.12.3.	SUCI Calculation by default system application – IMSI-based SUPI, Null Scheme .....	552
8.2.12.4.	SUCI Calculation by default system application – NAI-based SUPI, Profile A .....	553
8.2.12.5.	SUCI Calculation by default system application – NAI-based SUPI, Profile B .....	554
8.2.12.6.	SUCI Calculation by default system application – NAI-based SUPI, Null Scheme .....	555
8.2.12.7.	SUCI Calculation by default system application – IMSI-based SUPI, Profile A, wrong Key Index .....	557
8.2.12.8.	SUCI Calculation by default system application – IMSI-based SUPI, Profile B, wrong Key Index .....	558
8.2.13	Check IoT Minimal Profile .....	560
8.2.13.1.	Installing IoT Minimal Profile by template .....	560
8.2.13.2.	Installing 5G files in IoT Minimal Profile by template .....	561
8.2.13.3.	Error when the installation of IoT Minimal Profile is not supported .....	562
8.2.13.4.	Installing USIM files by template with OPT-USIM in IoT Minimal Profile .....	563
8.2.13.5.	Installing IoT Minimal Profile containing Generic File Management .....	565
8.2.13.6.	Altering default access rule in IoT Minimal Profile .....	566
8.2.13.7.	Adding additional access rule in IoT Minimal Profile .....	567
8.2.13.8.	Removing default access rule in IoT Minimal Profile .....	568
8.2.13.9.	Changing USIM ef-arr from linked to independent file .....	569

## 9. ANNEX A (Informative) : Java files .....571

---

<b>10.</b>	<b>ANNEX B (Normative) : SFI values.....</b>	<b>571</b>
10.1	ANNEX B1 (Normative) : SFI values in MF .....	571
10.2	ANNEX B2 (Normative) : SFI values in DF TELECOM .....	571
10.3	ANNEX B3 (Normative) : SFI values in ADF USIM .....	571
10.4	ANNEX B4 (Normative) : SFI values in OPT USIM .....	572
10.5	ANNEX B5 (Normative) : SFI values in ADF ISIM .....	572
10.6	ANNEX B6 (Normative) : SFI values in ADF CSIM .....	572
10.7	ANNEX B7 (Normative) : SFI values in OPT CSIM .....	573
10.8	ANNEX B8 (Normative) : SFI values in DF GSM ACCESS.....	573
<b>11.</b>	<b>ANNEX C (Informative) : Document history .....</b>	<b>573</b>

## 1. Objective

The objective of this document is to define the test specification of the interoperable eUICC Profile. This specification is based on [SA PP TS].

## 2. Introduction

This specification has the objective of testing if a profile is correctly interpreted and correctly loaded on an eUICC.

This document is agnostic on the format of the eUICC: both soldered (embedded in a device) and non-soldered (stand-alone) eUICCs can be the subject of testing. The test cases are written so that they can be used to test both soldered and non-soldered eUICC formats. The exceptions are the test cases listed in Section 6.6.7 which can be used only for non-soldered eUICCs, because certain APDU commands used during test execution have to be sent to the eUICC using the ISO interface.

The elements within the scope of this test specification are described in the following figure:

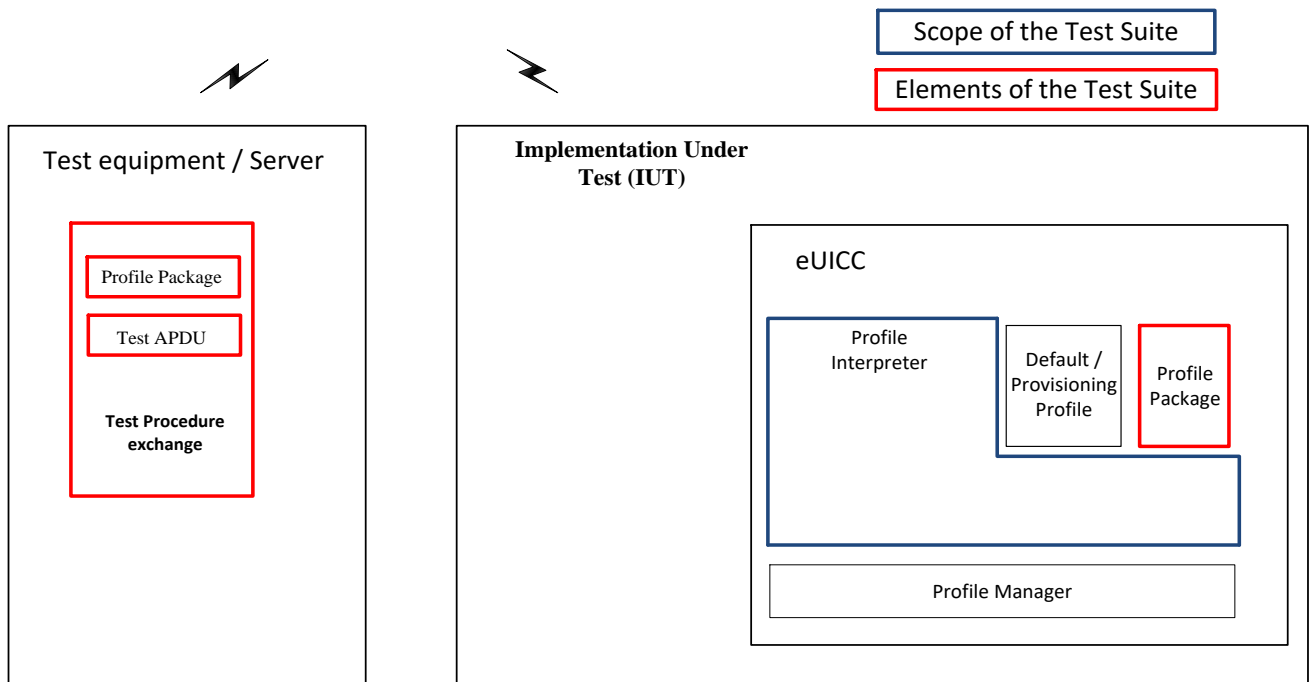


Figure 1: Scope of the testing



## 3. References

Note: these references do not mandate the implementation of the complete version referenced.

### 3.1 Normative References

- [SA PP TS]: SIMalliance eUICC Profile Package: Interoperable Format Technical Specification V2.1.
- [SA PP TS]: SIMalliance eUICC Profile Package: Interoperable Format Technical Specification V2.2.
- [SA PP TS]: SIMalliance eUICC Profile Package: Interoperable Format Technical Specification V2.3.1
- [SA PP TS]: SIMalliance eUICC Profile Package: Interoperable Format Technical Specification V3.1
- [SA PP TS]: Trusted Connectivity Alliance eUICC Profile Package: Interoperable Format Technical Specification V3.2
- [SA PP TS]: Trusted Connectivity Alliance eUICC Profile Package: Interoperable Format Technical Specification V3.3.1
- [GS RPT]: GSMA Remote Provisioning Architecture for Embedded UICC Technical Specification V3.2, 27 June 2017.
- [GS RPT]: GSMA Remote Provisioning Architecture for Embedded UICC Technical Specification V4.0, 25 February 2019.
- [GS RPT]: GSMA Remote Provisioning Architecture for Embedded UICC Technical Specification V4.1, 05 June 2020.
- [GS RPT]: GSMA Remote Provisioning Architecture for Embedded UICC Technical Specification V4.2, 07 July 2020.
- [GS RPT]: GSMA Remote Provisioning Architecture for Embedded UICC Technical Specification V4.2.1, 26 November 2021.
- [GP AA]: Confidential Card Content Management Card Specification v2.3 – Amendment A V1.1.
- [GP AE]: GlobalPlatform Card Specification Amendment E v1.0.1.
- [GP SE]: GlobalPlatform Secure Element Configuration v1.0.
- [GS RPAT]: GSMA Remote Provisioning Architecture for Embedded UICC, Test Specification Version 3.2, 27 June 2017.
- [GS RPAT]: GSMA Remote Provisioning Architecture for Embedded UICC, Test Specification Version 3.3, 02. August 2018.
- [GS RPAT]: GSMA Remote Provisioning Architecture for Embedded UICC, Test Specification Version 4.0, 20. May 2019.
- [GS RPAT]: GSMA Remote Provisioning Architecture for Embedded UICC, Test Specification Version 4.2, 31. July 2020.
- [GS RPAT]: GSMA Remote Provisioning Architecture for Embedded UICC, Test Specification Version 4.2.1, 20. October 2020.
- [GS SGP22]: GSMA RSP Technical Specification V2.2.1
- [GS SGP22]: GSMA RSP Technical Specification V2.2.2

- [GS SGP22]: GSMA RSP Technical Specification V2.3
- [GS SGP22]: GSMA RSP Technical Specification V2.4
- [GS SGP22]: GSMA RSP Technical Specification V2.5
- [GS SGP22]: GSMA RSP Technical Specification V3.0
- [GS SGP22]: GSMA RSP Technical Specification V3.1
- [GS SGP26]: GSMA RSP Test Certificates Definition V3.0.2
- [GS SGP26]: GSMA RSP Test Certificates Definition V1.5
- [GS SGP32]: GSMA eSIM IoT Technical Specification V1.0
- [GS SGP32]: GSMA eSIM IoT Technical Specification V1.2
- [RFCTLS]: RFC5246 The Transport Layer Security (TLS) Protocol V1.2.
- [MILENAGE TEST]: ETSI TS 135208 Specification of the MILENAGE algorithm set V11.0.0.
- [TUAK TEST]: ETSI TS 135233 Specification of the TUAK algorithm set V13.0.0.
- [JAVACARD VM] Java Card 3 Platform Virtual Machine Specification, Classic Edition Version 3.0.4
- [ITU-T X.690]: ASN.1 Encoding Rules: Specification of Basic Encoding Rules (BER), Canonical Encoding Rules (CER) and Distinguished Encoding Rules (DER) including Corrigendum 1 and 2 , November 2008

For further Normative References see Chapter 4.1 Normative References in [SA PP TS].

## 3.2 Informative References

- [TS 133102] ETSI TS 133 102 Security architecture V15.0.0.

For further Informative References see Chapter 4.2 Informative References in [SA PP TS].

## 4. Abbreviations

ADF	Application Dedicated File
AID	Application Identifier
AKA	Authentication and Key Agreement
APDU	Application Protocol Data Unit
ASN.1	Abstract Syntax Notation One
BER	Basic Encoding Rule
CASD	Controlling Authority Security Domain
CAT_TP	Card Application Toolkit Transport Protocol
CD	Configuration Data
CDMA	Code Division Multiple Access
CSIM	cdma2000 Subscriber Identity Module
CIN	Card Image Number / Card Identification Number
DER	Distinguished Encoding Rule
DF	Dedicated File
DGI	Data Grouping Identifier
DO	Data Object
EAP	Extensible Authentication Protocol
ECIES	Elliptic Curve Integrated Encryption Scheme
EF	Elementary File
eIM	eSIM IoT Remote Manager
eUICC	embedded UICC
EUM	eUICC Manufacturer
FCP	File Control Parameters
FFS	For Further Study
GBA	Generic Bootstrapping Architecture
GCI	Global Cable Identifier
GLI	Global Line Identifier
HCI	Host Controller Interface
ICCID	Integrated Circuit Card ID
ID	Identifier
IIN	Issuer Identification Number
IMSI	International Mobile Subscriber Identity
ISD-P	Issuer Security Domain Profile
ISIM	IP Multimedia Services Identity Module
IUT	Implementation Under Test
LCSI	Life Cycle Status Information
M2M	Machine to Machine
MAC	Message Authentication Code
MAC-A	MAC used for authentication and key agreement
MBMS	Multimedia Broadcast/Multicast Service
MNO	Mobile Network Operator
MNO-SD	Mobile Network Operator Security Domain (Root SD of a Profile)
NAA	Network Access Application

NAC	Network Access Control
NAI	Network Access Identifier
OID	Object Identifier
OS	Operating System (of the eUICC)
OTA	Over the Air
PE	Profile Element
PIN	Personal Identification Number
PDU	Protocol Data Unit
POL	Policy Rules within the Profile
PUK	PIN Unblocking Key
RAM	Remote Application Management
RFM	Remote File Management
RQ	Requirement
SAIP	SIMAlliance Interoperable Profile (Note: SIMAlliance is the former name of TCA)
SCP	Secure Channel Protocol
SDU	Service Data Unit
SFI	Short File Identifier
SD	Security Domain
SP	Service Provider
SQN	Sequence Number
SSD	Supplementary Security Domain
SUCI	Subscription Concealed Identifier
SW	Status Word
SWP	Single Wire Protocol
TLV	Tag Length Value
TN3GPPSNN	Trusted non-3GPP Serving network names list
URSP	UE Route Selection Policy
USIM	Universal Subscriber Identity Module
T	Test Tool

## 5. Definitions

Default Profile	A profile which can be used to connect to the network.
embedded UICC	An UICC which is not easily accessible or replaceable, is not intended to be removed or replaced in the terminal, and enables the secure changing of subscriptions.
Policy Rules	Defines the atomic action of a policy and the conditions under which it is executed.
Profile	Combination of a file structure, data and applications on an eUICC.
Profile Creator	External entity in charge of creating the Profile Package based on MNO requirements, protecting the Profile Package from modification and/or content access.
Profile Element	A Profile Element is a part of the Profile Package representing one or several features of the Profile encoded using TLV structures based on ASN.1 description.
Profile Interpreter	On card entity, which interprets and translates the ASN profile data to objects residing on the eUICC (files, SD-s, applications, keys, etc.).

---

Profile Manager	On-card entity, which is able to load, install, activate and deactivate a profile as per GSMA [GS RPT].
Profile Package	A Personalised Profile using an interoperable description format transmitted to an eUICC in order to load and install a Profile.
Provisioning	The downloading and installation of a Profile into an eUICC.
Provisioning Profile	The profile which can be used to download an Operational Profile into an eUICC.
Remote Provisioning	Provisioning done by the subscription manager on an eUICC outside of their premises, using a secure data link.

---

## **6. Test environment**

### **6.1 Table of optional features**

The supplier of the implementation shall state the support of possible options in Table 1.

Item	Option	Support	Mnemonic
1	Support of USIM.		O_USIM
2	Support of ISIM.		O_ISIM
3	Support of CSIM.		O_CSIM
4	Support of milenage.		O_MILENAGE
5	Support of TUAK 128		O_TUAK_128
6	Support of CAVE.		O_CAVE
7	Support of GBA-USIM.		O_GBA_USIM
8	Support of GBA-ISIM.		O_GBA_ISIM
9	Support of MBMS.		O_MBMS
10	Support of EAP.		O_EAP
11	Support Contactless.		O_CONTACTLESS
12	Support of Java Card.		O_JAVACARD
13	Support of Multos.		O_MULTOS
14	Support of ETSI TS 102 613 and TS 102 622. Card-emulation Mode.		O_CARDEMULATION
15	Support of ETSI TS 102 613 and TS 102 622. Reader Mode Protocol Data Type A.		O_READER_MODE_TYPE_A
16	Support of GlobalPlatform UICC Configuration.		O_UICC_CONFIGURATION
17	VOID		
18	VOID		
19	For ApplicationLoadPackage, the following parameters are supported: nonVolatileCodeLimitC6 volatileDataLimitC7 nonVolatileDataLimitC8. For volatileDataLimitC7 with value '000FFFFF' the eUICC reports error status.		O_MEMORY_LIMIT
20	For ApplicationLoadPackage hashValue is supported and checked by the eUICC when it is present.		O_HASHVALUE
21	The eUICC reports error status and aborts the installation when profile with PE-USIM before PE-MF is loaded.		O_ERROR_FOR_PE_USIM_BEFORE PE_MF
22	The eUICC reports error status and aborts the installation when profile with PE-Application before PE-SecurityDomain is loaded.		O_ERROR_FOR_PE_APPL ICATION_BEFORE PE_SECURITYDOMAIN
23	The eUICC reports error status and aborts the installation when profile with PE-RFM before PE-SecurityDomain is loaded.		O_ERROR_FOR_PE_RFM_BEFORE PE_SECURITYDOMAIN
24	VOID		
25	VOID		
26	VOID		
27	VOID		
28	VOID		
29	VOID		
30	VOID		
31 See Note1	VOID		
32	Support of file type BER-TLV.		O_BER_TLV
33	Support of tag list (5C).		O_SUPPORT_TAG_5C
34	Support of tag 'CF' in tag list (5C).		O_SUPPORT_TAG_CF
35	Support of file type DF-link.		O_DF_LINK
36	VOID		
37	VOID		
38	VOID		
39	VOID		
40	Support Memory Management acc to [GP CS]		O_MEMO_MANAGEMENT
41	Support of Scenario#3 with NIST P-256 as defined in [GP AE]		O_SCENARIO3_NIST
42	Support of usim-test-algorithm		O_USIM_TEST_ALGORITHM

43	Support of TUAK 256		O_TUAK_256
44	Support extended range of TUAK authentication parameter lengths from [SA PP TS] i.e. not restricted by [TS 133102]		O_EXTENDED_AUTH_PARAMETER_LEN
45	Support of CAT_TP		O_CAT_TP
46 Note3	Support offset in eUICC Response		O_RESP_OFFSET
47	The eUICC reports error status and aborts the installation when Local PINs referenced by a pinStatusTemplateDO is not created in a following PE-PINCodes		O_ERROR_LOCALPINCODE_MISSING
48	Support of services N°8 HRPD and N°14 3GPD-SIP and N°15 3GPD-MIP by CSIM.		O_CSIM_SERVICES_8_AND_14_AND_15
49	VOID		
50	VOID		
51	Support of AuthCounterMax with error '6F00'h		O_AUTH_MAX
52	Support of RSA Keys with length 1024		O_RSA_1024
53	Support of Scenario#2B as defined in [GP AA]		O_SCENARIO2B
54	VOID		VOID
55	VOID		VOID
56	VOID		VOID
57	VOID		VOID
58	Support of multiple-USIM.		O_MULTIPLE_USIM
59	Support of get-identity feature as defined in [SA PP TS]		O_GET_IDENTITY
60	Support of profile-a-x25519 feature as defined in [SA PP TS]		O_PROFILE_A
61	Support of profile-b-p256 feature as defined in [SA PP TS]		O_PROFILE_B
62 Note4	V3.x eUICC implementation which supports the installation of a Profile Package based on [SA PP TS] v2.3.1		O_PP_V2
63	Support of SCP02 i = 55		O_SD_SCP02_I55
64	Support of the DNS resolution mechanism based on GlobalPlatform Remote Application Management over HTTP Card Specification v2.3 – Amendment B, or later [GP AB]		O_GP_AMENDMENT_B_DNS_SUPPORTED
65 Note3	Support of ETSI TS 102.226 Access Domain DAP and Toolkit Parameter DAP		O_ETSI_DAP
66 Note3	Support of Personalisation of Security Domains using "processData"		O_SD_PROCESSDATA
67	Support of SCP11a and SCP11c		O_SD_SCP11_AC
68	Support of SCP11c authorization mechanism (tag 'BF20')		O_SD_SCP11_C_BF20
69	Support of S16 mode as defined in GP specifications [GP AF] and [GP AD].		O_SD_SCP_S16
70	Support of IoT Minimal Profile		O_IOT_MINPROFILE
71	Support of Cumulative Granted Memory		O_CGM
72	Support of Contactless Type A Protocol		O_CONTACTLESS_TYPE_A
73	Support of Contactless Type B Protocol		O_CONTACTLESS_TYPE_B
74	Support of Contactless Type F Protocol		O_CONTACTLESS_TYPE_F
75	Support of ETSI TS 102 613 and TS 102 622. Reader Mode Protocol Data Type B.		O_READER_MODE_TYPE_B
76 See Note5	Support of SCP81.		O_SCP81



Note1: VOID  
Note2: VOID  
Note3: this feature is optional only for implementations up to v3.1. For v3.2 implementations and onwards this feature shall be supported by the eUICC.  
Note4: this feature is applicable only for v3.x implementations.  
Note5: this feature is optional only for implementations based on SGP22 and SGP32. It is mandated for implementations based on SGP02.

**Table 1: Options**

### **6.1.1 Information to be provided by the Supplier**

The supplier of the implementation shall provide the following information:

Item	Description	Mnemonic	Value
1	The version of the TCA eUICC Profile Package: Interoperable Format Technical Specification implemented by the eUICC	TCA_VERSION	(E.g.: '2.3.1' , or '3.1')

## 6.2 Applicability table

Table 2 specifies the applicability of each test case to the IUT.

[illegible]

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
8.2.3.2	Installing USIM files by template.	C009	C009	C009	C009	C009	C058	C009
8.2.3.3	Installing USIM files by template with OPT-USIM-2.	C009	C009	C009	C009	C009	C058	C009
8.2.3.4	Installing USIM files by template with BER-TLV files in ServicesList.	C012	C012	C012	C012	C012	C059	C012
8.2.3.5	Error when installing PE-USIM when eUICC does not support USIM.	C003	C003	C003	C003	C003	NA	C003
8.2.3.6	Warning when installing USIM files by template with BER-TLV files in a non mandatory PE when eUICC does not support BER-TLV.	C013	C013	C013	C013	C013	NA	C013
8.2.3.7	Warning when creating a DF with dfLink in a non mandatory PE when eUICC does not support dfLink.	C015	C015	C015	C015	C015	NA	C015
8.2.3.9	Creating a DF with dfLink when eUICC supports dfLink and dfLink is in ServicesList.	C016	C016	C016	C016	C016	NA	C016
8.2.3.10	Installing CSIM files by template.	C018	C018	C018	C018	C018	C060	C018
8.2.3.11	Installing ISIM files by template.	C020	C020	C020	C020	C020	C061	C020
8.2.3.12	Installing USIM files by template without content.	NA	C009	C009	C009	C009	C058	C009
8.2.3.13	Creating file instances with and without explicitly set file ID.	NA	C009	C009	C009	C009	C058	C009
8.2.3.14	Error when installing PE-CSIM when eUICC does not support CSIM.	C022	C022	C022	C022	C022	NA	C022
8.2.3.15	Installing GSM-ACCESS files by template.	C009	C009	C009	C009	C009	NA	C009
8.2.3.16	Installing USIM Phonebook files by template.	C009	C009	C009	C009	C009	NA	C009
8.2.3.17	Installing EAP files by template	NA	C036	C036	C036	C036	NA	C036

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
8.2.3.18	Error when installing USIM files by template with BER-TLV files in a mandatory PE when eUICC does not support BER-TLV	C013	C013	C013	C013	C013	NA	C013
8.2.3.19	Installing USIM files by template using proprietaryEFInfo	NA	NA	C009	C009	C009	C058	C009
8.2.3.20	Installing profile with multiple FileManagement elements	C009	C009	C009	C009	C009	C058	C009
8.2.3.21	Installing multiple USIM by template.	C051	C051	C051	C051	C051	C062	C051
8.2.3.22	Installing ISIM files by version2 template	NA	NA	NA	C064	C064	NA	C064
8.2.3.23	Installing TELECOM files by version2 template	NA	NA	NA	C012	C012	NA	C012
8.2.3.24	Creating a DF with linked EF	NA	NA	NA	C009	C009	NA	C009
8.2.3.25	Creating a EF using filePath	NA	NA	C009	C009	C009	NA	C009
8.2.3.26	Creating a EF using filePath of zero length	NA	NA	C009	C009	C009	NA	C009
8.2.3.27	Installing 5G files by template	NA	NA	C048	NA	NA	C063	NA
8.2.3.28	Installing 5G files by version2 template	NA	NA	NA	C056	C056	NA	C056
8.2.3.29	Installing OPT USIM files by version2 template	NA	NA	NA	C012	C012	NA	C012
8.2.3.30	Installing 5G files by version3 template with service 136 available	NA	NA	NA	C056	C056	NA	C056
8.2.3.31	Installing LTE Files within USIM and ISIM by template	C068	C068	C068	C069	C069	C083	C069
8.2.3.32	Installing 5G files by version4 template, SNPN and 5G PROSE files by template	NA	NA	NA	NA	NA	NA	C056
8.2.3.33	Installing OPT USIM files by version3 template	NA	NA	NA	NA	NA	NA	C012
	<b>Check NAA(s)</b>							

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
8.2.4.1	Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE	C009	C009	C009	C009	C009	NA	C009
8.2.4.2	Installing PE-AKAPParameters with TUAK and sending AUTHENTICATE	C021	C021	C021	C021	C021	NA	C021
8.2.4.3	Installing PE-AKAPParameters with usim-test-algorithm and sending AUTHENTICATE	C025	C025	C025	C025	C025	NA	C025
8.2.4.4	Installing PE-AKAPParameters with TUAK with 256 bit key and restricted length and sending AUTHENTICATE	C026	C026	C026	C026	C026	NA	C026
8.2.4.5	Installing PE-AKAPParameters with TUAK with 256 bit key and sending AUTHENTICATE	C028	C028	C028	C028	C028	NA	C028
8.2.4.6	Installing PE-AKAPParameters with TUAK with numberOfKeccak and restricted length and sending AUTHENTICATE	C026	C026	C026	C026	C026	NA	C026
8.2.4.7	Installing PE-AKAPParameters with TUAK with numberOfKeccak and sending AUTHENTICATE	C028	C028	C028	C028	C028	NA	C028
8.2.4.8	Error when authCounterMax exceeded	C037	C037	C037	C037	C037	NA	C037
8.2.4.9	Test Milenage PIN verification and defined constants	C009	C009	C009	C009	C009	NA	C009
8.2.4.10	Blocked SQN with wrap around deactivated	C009	C009	C009	C009	C009	NA	C009
8.2.4.11	Testing SQN delta and age limit	C009	C009	C009	C009	C009	NA	C009
8.2.4.12	Test usim-test-algorithm with 32 bit RES length	NA	C025	C025	C025	C025	NA	C025

[illegible]

[illegible]

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
8.2.6.8	Check installing an SSD under a self extradited SSD	C009	C009	C009	C009	C009	NA	C009
8.2.6.9	Check initial counter is default when keyCounterValue absent	C009	C009	C009	C009	C009	NA	C009
8.2.6.10	Error when Installing KeyObject parameter not supported	C039	C039	C039	C039	C039	NA	C039
8.2.6.11	Check SCP parameters when both SCP80 and SCP02 is supported in SSD	C057	C057	C057	C057	C057	NA	C057
8.2.6.12	Check SCP parameters when SCP80 is supported in SSD	C009	C009	C009	C009	C009	NA	C009
8.2.6.13	Check LCS when no value is provided in lifeCycleState parameter	C009	C009	C009	C009	C009	NA	C009
8.2.6.14	Check OTA DNS Personalisation.	NA	NA	NA	NA	C066	NA	C066
8.2.6.15	Check SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key	C067	C067	C067	C067	C009	NA	C009
8.2.6.16	Check failure of SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key	C067	C067	C067	C067	C009	NA	C009
8.2.6.17	Check installing PE Security Domain with specific load package and class AID-s	NA	NA	NA	NA	C009	NA	C009
8.2.6.18	Check processData for Security Domain.	C070	C070	C070	C070	C009	NA	C009
8.2.6.19	Check Get Data returns correct SCP11-related parameters when SCP11 is supported in SSD	NA	NA	NA	NA	C071	NA	C071
8.2.6.20	Check SCP11 parameters when SCP11c authorization mechanism is supported in SSD	NA	NA	NA	NA	C072	NA	C072



[illegible]

[illegible]

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
	(Type F Protocol) inside the ApplicationInstance with contactless eUICC Mandatory service selected							
8.2.7.20	Check Application PE installed setting the Additional Contactless Parameters (reader mode protocol data Type B) according to the ETSI TS 102.226	C081	C081	C081	C081	C081	NA	C081
	<b>Check RFM parameters</b>							
8.2.8.1	Installing PE-RFM with adfRFMAccess.	C009	C009	C009	C009	C009	NA	C009
8.2.8.2	Installing PE-RFM without adfRFMAccess.	C009	C009	C009	C009	C009	NA	C009
8.2.8.3	Installing profile with two difference PE-RFMs	C009	C009	C009	C009	C009	NA	C009
8.2.8.4	Installing PE-RFM associated to SSD1	C009	C009	C009	C009	C009	NA	C009
	<b>Check Non standardised content</b>							
8.2.9.1	No error when installing non mandatory PE-NonStandard.	C009	C009	C009	NA	NA	NA	NA
8.2.9.2	Error when installing mandatory PE-NonStandard	C009	C009	C009	C009	C009	NA	C009
8.2.9.3	Warning when installing non mandatory PE-NonStandard.	NA	NA	NA	C009	C009	NA	C009
	<b>Check eUICC Response</b>							
8.2.11.1	Check unsupported major version.	C009	C009	C009	C009	C009	NA	C009
8.2.11.2	Check unsupported template in Profile Header.	C009	C009	C009	C009	C009	NA	C009
8.2.11.3	Check offset in eUICC Response with error.	NA	C030	C030	C030	C009	NA	C009
8.2.11.4	Check unknown tag in Profile Package	NA	C009	C009	C009	C009	NA	C009
8.2.11.5	Warning if GBA not supported	NA	C052	C052	C052	C052	NA	C052
8.2.11.6	Warning if MBMS not supported	NA	C053	C053	C053	C053	NA	C053

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
8.2.11.7	Warning if GBA and MBMS not supported	NA	C054	C054	C054	C054	NA	C054
8.2.11.8	Error if GBA not supported	C052	C052	C052	C052	C052	NA	C052
8.2.11.9	Error if MBMS not supported	C053	C053	C053	C053	C053	NA	C053
8.2.11.10	Error if GBA and MBMS not supported	C054	C054	C054	C054	C054	NA	C054
8.2.11.11	No error if GBA and MBMS supported	C055	C055	C055	C055	C055	NA	C055
8.2.11.12	Error when template version is not supported in a mandatory PE MF	C009	C009	C009	C009	C009	NA	C009
8.2.11.13	Error when template version is not supported in a non-mandatory PE MF	NA	NA	NA	NA	NA	NA	C009
8.2.11.14	Error when template version is not supported in a mandatory PE USIM	C009	C009	C009	C009	C009	NA	C009
8.2.11.15	Warning when template version is not supported in a non-mandatory PE GSM ACCESS	C009	C009	C009	C009	C009	NA	C009
	<b>Check SUCI Calculation by USIM</b>							
8.2.12.1	SUCI Calculation by default system application – IMSI-based SUPI, Profile A	NA	NA	C046	C046	C046	NA	C046
8.2.12.2	SUCI Calculation by default system application – IMSI-based SUPI, Profile B	NA	NA	C047	C047	C047	NA	C047
8.2.12.3	SUCI Calculation by default system application – IMSI-based SUPI, Null Scheme	NA	NA	C048	C048	C048	NA	C048
8.2.12.4	SUCI Calculation by default system application – NSI-based SUPI, Profile A	NA	NA	NA	C046	C046	NA	C046
8.2.12.5	SUCI Calculation by default system application – NSI-based SUPI, Profile B	NA	NA	NA	C047	C047	NA	C047

Test case	Test case title	Version 2.1	Version 2.2	Version 2.3.1	Version 3.1	Version 3.2	Version 3.x with O_PP V2	Version 3.3.1
8.2.12.6	SUCI Calculation by default system application – NSI-based SUPI, Null Scheme	NA	NA	NA	C048	C048	NA	C048
8.2.12.7	SUCI Calculation by default system application – IMSI-based SUPI, Profile A, wrong Key Index	NA	NA	C046	C046	C046	NA	C046
8.2.12.8	SUCI Calculation by default system application – IMSI-based SUPI, Profile B, wrong Key Index	NA	NA	C047	C047	C047	NA	C047
	<b>Check IoT Minimal Profile</b>							
8.2.13.1	Installing IoT Minimal Profile by template	NA	NA	NA	NA	NA	NA	C074
8.2.13.2	Installing 5G files in IoT Minimal Profile by template	NA	NA	NA	NA	NA	NA	C075
8.2.13.3	Error when the installation of IoT Minimal Profile is not supported	NA	NA	NA	NA	NA	NA	C076
8.2.13.4	Installing USIM files by template with OPT-USIM in IoT Minimal Profile	NA	NA	NA	NA	NA	NA	C074
8.2.13.5	Installing IoT Minimal Profile containing Generic File Management	NA	NA	NA	NA	NA	NA	C074
8.2.13.6	Altering default access rule in IoT Minimal Profile	NA	NA	NA	NA	NA	NA	C074
8.2.13.7	Adding additional access rule in IoT Minimal Profile	NA	NA	NA	NA	NA	NA	C074
8.2.13.8	Removing default access rule in IoT Minimal Profile	NA	NA	NA	NA	NA	NA	C074
8.2.13.9	Changing USIM ef-arr from linked to independent file	NA	NA	NA	NA	NA	NA	C074

**Table 2: Applicability of tests**

Conditional item	Condition
C001	VOID
C002	VOID
C003	IF O_USIM NOT SUPPORTED THEN M ELSE N/A
C004	IF (O_JAVACARD AND O_MEMORY_LIMIT SUPPORTED AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED) THEN M ELSE N/A
C005	IF (O_JAVACARD AND O_HASHVALUE SUPPORTED AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED) THEN M ELSE N/A
C006	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_ERROR_FOR_PE_USIM_BEFORE PE_MF SUPPORTED) THEN M ELSE N/A
C007	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_ERROR_FOR_PE_APPLICATION_BEFORE PE_SECURITYDOMAIN SUPPORTED) THEN M ELSE N/A
C008	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_ERROR_FOR_PE_RFM_BEFORE PE_SECURITYDOMAIN SUPPORTED) THEN M ELSE N/A
C009	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED) THEN M ELSE N/A
C010	VOID
C011	VOID
C012	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_BER_TLV SUPPORTED) THEN M ELSE N/A
C013	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_BER_TLV NOT SUPPORTED) THEN M ELSE N/A
C014	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SUPPORT_TAG_5C AND O_SUPPORT_TAG_CF) THEN M ELSE N/A
C015	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_DF_LINK NOT SUPPORTED) THEN M ELSE N/A
C016	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_DF_LINK SUPPORTED) THEN M ELSE N/A
C017	VOID
C018	IF (O_CSIM SUPPORTED AND O_CAVE SUPPORTED) THEN M ELSE N/A
C019	VOID
C020	IF (O_USIM SUPPORTED AND O_ISIM SUPPORTED AND O_MILENAGE) THEN M ELSE N/A
C021	IF (O_USIM SUPPORTED AND O_TUAK_128 SUPPORTED) THEN M ELSE N/A
C022	IF O_CSIM NOT SUPPORTED THEN M ELSE N/A
C023	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_MEMO_MANAGEMENT SUPPORTED) THEN M ELSE N/A
C024	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SCENARIO3_NIST SUPPORTED) THEN M ELSE N/A
C025	IF (O_USIM SUPPORTED AND O_USIM_TEST_ALGORITHM SUPPORTED) THEN M ELSE N/A
C026	IF (O_USIM SUPPORTED AND O_TUAK_256 SUPPORTED) THEN M ELSE N/A
C027	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_CONTACTLESS NOT SUPPORTED) THEN M ELSE N/A
C028	IF (O_USIM SUPPORTED AND O_TUAK_256 SUPPORTED AND O_EXTENDED_AUTH_PARAM_LEN) THEN M ELSE N/A
C029	IF (O_USIM SUPPORTED AND O_CAT_TP NOT SUPPORTED) THEN M ELSE N/A
C030	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_RESP_OFFSET) THEN M ELSE N/A
C031	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_ERROR_LOCALPINCODE_MISSING SUPPORTED) THEN M ELSE N/A
C032	VOID

Conditional item	Condition
C033	IF (O_CSIM SUPPORTED AND O_CAVE SUPPORTED AND O_CSIM_SERVICES_8_AND_14_AND_15) THEN M ELSE N/A
C034	VOID
C035	VOID
C036	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_EAP SUPPORTED) THEN M ELSE N/A
C037	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_AUTH_MAX SUPPORTED) THEN M ELSE N/A
C038	VOID
C039	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_RSA_1024 NOT SUPPORTED) THEN M ELSE N/A
C040	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SCENARIO2B SUPPORTED AND O_RSA_1024 SUPPORTED) THEN M ELSE N/A
C041	VOID
C042	VOID
C043	VOID
C044	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED) THEN M ELSE N/A
C045	VOID
C046	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_GET_IDENTITY SUPPORTED AND O_PROFILE_A SUPPORTED) THEN M ELSE N/A
C047	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_GET_IDENTITY SUPPORTED AND O_PROFILE_B SUPPORTED) THEN M ELSE N/A
C048	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_GET_IDENTITY SUPPORTED) THEN M ELSE N/A
C049	VOID
C050	VOID
C051	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_TUAK_128 SUPPORTED AND O_MULTIPLE_USIM SUPPORTED) THEN M ELSE N/A
C052	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_MBMS SUPPORTED AND O_GBA_USIM NOT SUPPORTED) THEN M ELSE N/A
C053	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_GBA_USIM SUPPORTED AND O_MBMS NOT SUPPORTED) THEN M ELSE N/A
C054	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_MBMS NOT SUPPORTED AND O_GBA_USIM NOT SUPPORTED) THEN M ELSE N/A
C055	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_MBMS SUPPORTED AND O_GBA_USIM SUPPORTED) THEN M ELSE N/A
C056	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_BER_TLV SUPPORTED AND O_GET_IDENTITY SUPPORTED) THEN M ELSE N/A
C057	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SD_SCP02_I55 SUPPORTED) THEN M ELSE N/A
C058	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A

Conditional item	Condition
C059	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_BER_TLV SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A
C060	IF (O_CSIM SUPPORTED AND O_CAVE SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A
C061	IF (O_USIM SUPPORTED AND O_ISIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A
C062	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_TUAK_128 SUPPORTED AND O_MULTIPLE_USIM SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A
C063	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_GET_IDENTITY SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A
C064	IF (O_USIM SUPPORTED AND O_ISIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_BER_TLV SUPPORTED) THEN M ELSE N/A
C065	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_CONTACTLESS SUPPORTED AND O_CONTACTLESS_TYPE_A SUPPORTED AND O_SUPPORT_TAG_5C SUPPORTED) THEN M ELSE N/A
C066	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SCP81 SUPPORTED AND O_GP_AMENDMENT_B_DNS SUPPORTED) THEN M ELSE N/A
C067	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_ETSI_DAP SUPPORTED) THEN M ELSE N/A
C068	IF (O_USIM SUPPORTED AND O_ISIM SUPPORTED AND O_GBA_ISIM_SUPPORTED AND O_MILENAGE) THEN M ELSE N/A
C069	IF (O_USIM SUPPORTED AND O_ISIM SUPPORTED AND O_GBA_ISIM_SUPPORTED AND O_MILENAGE SUPPORTED AND O_BER_TLV SUPPORTED) THEN M ELSE N/A
C070	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SD_PROCESSDATA) THEN M ELSE N/A
C071	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SD_SCP11_AC SUPPORTED) THEN M ELSE N/A
C072	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SD_SCP11_AC SUPPORTED AND O_SD_SCP11_C_BF20 SUPPORTED) THEN M ELSE N/A
C073	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SD_SCP11_AC SUPPORTED AND O_SD_SCP_S16 SUPPORTED) THEN M ELSE N/A
C074	IF (O_IOT_MINPROFILE SUPPORTED AND O_MILENAGE SUPPORTED) THEN M ELSE N/A
C075	IF (O_IOT_MINPROFILE SUPPORTED AND O_MILENAGE SUPPORTED AND O_GET_IDENTITY SUPPORTED) THEN M ELSE N/A
C076	IF (NOT O_IOT_MINPROFILE SUPPORTED AND O_MILENAGE SUPPORTED) THEN M ELSE N/A
C077	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SUPPORT_TAG_5C AND O_CGM SUPPORTED) THEN M ELSE N/A



Conditional item	Condition
C078	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_CONTACTLESS SUPPORTED AND O_CONTACTLESS_TYPE_B SUPPORTED AND O_SUPPORT_TAG_5C SUPPORTED) THEM M ELSE N/A
C079	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_CONTACTLESS SUPPORTED AND O_CONTACTLESS_TYPE_F SUPPORTED AND O_SUPPORT_TAG_5C SUPPORTED) THEM M ELSE N/A
C080	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_CONTACTLESS SUPPORTED AND O_READER_MODE_TYPE_A SUPPORTED) THEM M ELSE N/A
C081	IF (O_JAVACARD AND O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_CONTACTLESS SUPPORTED AND O_READER_MODE_TYPE_B SUPPORTED) THEM M ELSE N/A
C082	IF (O_USIM SUPPORTED AND O_MILENAGE SUPPORTED AND O_SCP81 SUPPORTED) THEN M ELSE N/A
C083	IF (O_USIM SUPPORTED AND O_ISIM SUPPORTED AND O_GBA_ISIM_SUPPORTED AND O_MILENAGE SUPPORTED AND O_PP_V2 SUPPORTED) THEN M ELSE N/A

**Table 3: Conditional items referenced by Table 2**

The following rules apply based on which TCA\_VERSION is supported by the eUICC:  
(for the Profile Package vX definitions see Section 6.15.)

If the eUICC supports TCA\_VERSION 2.1 the applicable test cases from column "Version 2.1" of the applicability table shall be run with "Profile Package v2".

If the eUICC supports TCA\_VERSION 2.2 the applicable test cases from column "Version 2.2" of the applicability table shall be run with "Profile Package v2".

If the eUICC supports TCA\_VERSION 2.3.1 the applicable test cases from column "Version 2.3.1" of the applicability table shall be run with "Profile Package v2".

If the eUICC supports TCA\_VERSION 3.1 the applicable test cases from column "Version 3.1" of the applicability table shall be run with "Profile Package v3".

If the eUICC supports TCA\_VERSION 3.2 the applicable test cases from column "Version 3.2" of the applicability table shall be run with "Profile Package v3".

If the eUICC supports TCA\_VERSION 3.3.1 the applicable test cases from column "Version 3.3.1" of the applicability table shall be run with "Profile Package v3".

If the eUICC supports TCA\_VERSION 3.1 and O\_PP\_V2 the applicable test cases from column "Version 3.1" of the applicability table shall be run with "Profile Package v3". In addition the applicable test cases from column "Version 3.x with O\_PP\_V2" of the applicability table shall be run with "Profile Package v2".

If the eUICC supports TCA\_VERSION 3.2 and O\_PP\_V2 the applicable test cases from column "Version 3.2" of the applicability table shall be run with "Profile Package v3". In addition the applicable test cases from column "Version 3.x with O\_PP\_V2" of the applicability table shall be run with "Profile Package v2".

If the eUICC supports TCA\_VERSION 3.3.1 and O\_PP\_V2 the applicable test cases from column “Version 3.3.1” of the applicability table shall be run with “Profile Package v3”. In addition the applicable test cases from column “Version 3.x with O\_PP\_V2” of the applicability table shall be run with “Profile Package v2”.

If eUICC supports TCA\_VERSION 3.3.1 and O\_IOT\_MINPROFILE the applicable test cases from column “Version 3.3.1” of the applicability table shall be run with “Profile Package v3” and with “IoT Minimal Profile Package v3”. “Profile Package v3” shall be used, when “Profile Package v3” is defined in the test case. “IoT Minimal Profile Package v3” shall be used, when “IoT Minimal Profile Package v3” is defined in the test case.

## 6.3 Optional features and applicability tables formatting

### 6.3.1 Format of the table of optional features

The columns in Table 1 have the following meaning.

Column	Meaning
Option:	The optional feature supported or not by the implementation.
Support:	The support columns are to be filled in by the supplier of the implementation. The following common notations are used for the support column in table 1. <ul style="list-style-type: none"> <li>• Y or y supported by the implementation;</li> <li>• N or n not supported by the implementation;</li> <li>• N/A, or n/a - no answer required (allowed only if the status is N/A, directly or after evaluation of a conditional status).</li> </ul>
Mnemonic:	The mnemonic column contains mnemonic identifiers for each item.

### 6.3.2 Format of the applicability table

The applicability of every test in Table 2 is formally expressed by the use of Boolean expressions defined in the following clause 6.3.3.

The columns in Table 2 have the following meaning:

Column	Meaning
Test case:	The "Test case" column gives a reference to the test case number(s) detailed in the present document.
Test case title:	The "Test case title" column gives the title of the test case.
Version X:	The "Version X" column indicates which test cases are applicable for the given Technical Specification version. Several different status notifications can be used in this column. They are defined in clause 6.3.3. The "Version 3.x and O_PP_V2" column indicates the test cases applicable for an eUICC which implements [SA PP TS] v3.x and also supports the installation of a Profile Package based on [SA PP TS] v2.3.1.

### 6.3.3 Status and Notations

The "Version X" columns show the status of the entries as follows:

The following notations are used for the status column:

- M mandatory – the capability is required to be supported.
- O optional – the capability may be supported or not.
- N/A not applicable – in the given context, it is impossible to use the capability.
- X prohibited (excluded) – there is a requirement not to use this capability in the given context.
- O.i qualified optional – for mutually exclusive or selectable options from a set. "i" is an integer which identifies a unique group of related optional items and the logic of their selection, which is defined immediately following the table.
- Ci conditional – the requirement on the capability ("M", "O", "X" or "N/A") depends on the support of other optional or conditional items. "i" is an integer identifying a unique conditional status expression, which is defined immediately following the table. For nested conditional expressions, the syntax "IF ... THEN (IF ... THEN ... ELSE...) ELSE ..." is to be used to avoid ambiguities.

## 6.4 Test environment description

The general architecture for the test environment is:

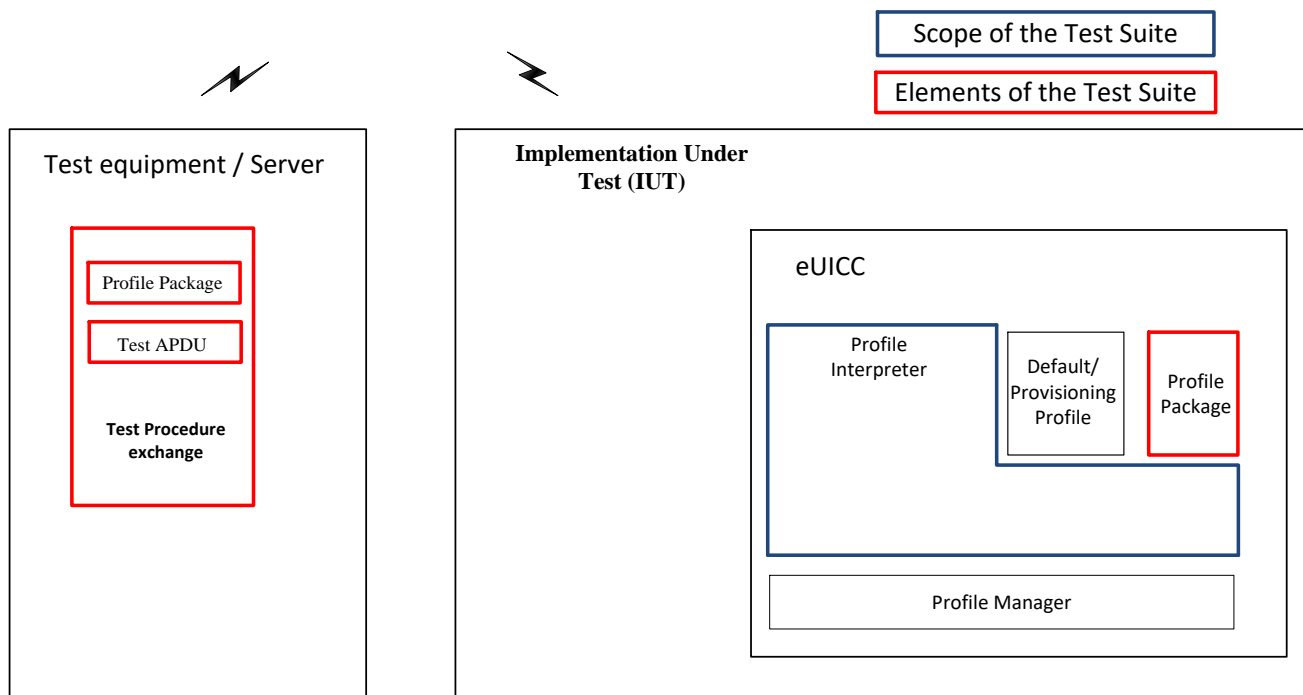


Figure 2: Test environment description

## 6.5 Test equipment

The test equipment shall meet the following requirements:

- The result of I/O commands shall be presented at the application layer.
- It shall be able to provide results of the tests.
- It shall be able to accept all valid status codes returned.
- It shall send all data specified in the Profile Package.
- It may be able to send and receive commands remotely to/from the IUT, OR
- It may provide a terminal simulation that is connected to the IUT during test procedure execution, unless otherwise specified. With respect to the eUICC, the terminal simulation shall act according to ETSI TS 102 221 [102 221], 3GPP TS 31.101 [UICC] (if this interface is present at the UICC) and 3GPP TS 31.102 [USIM], unless otherwise specified. The terminal simulation may provide the possibility to monitor the eUICC on the ETSI TS 102 221 [102 221] interface if this interface is accessible.
- It shall be able to validate the TLV encoding returned by the eUICC according to ASN.1 encoding rules as defined in [ITU-T X.690]

### 6.5.1 eIM Configuration

If the eUICC is based on [GS SGP32] the eUICC shall be associated to an initial eIM by the Test Tool using the credentials from [GS SGP26] V3.0.2. The association shall be performed once before running the test cases..

The Test Tool shall use the credentials from [GS SGP26] V3.0.2 to set up the eIM simulation.

## 6.6 Test execution

The order of the PE-s in the Profile Packages shall be kept as it is defined in the “Test Execution” subchapter of each test case.

After each test case execution, the eUICC shall be put back to its initial state.

### 6.6.1 General Initial Conditions

The General Initial Conditions are a set of general prerequisites for the IUT prior to the execution of testing. For each test procedure described in the present document, the following rules apply to the Initial Conditions:

- Unless otherwise stated, the IUT shall be reset before each test procedure.

#### 6.6.1.1. M2M Architecture

In dependence on the [GS RPAT] the eUICC whether it is removable or not has to reside in an initial state to allow download of a profile. In order to ease the test execution, the creation of the ISD-P is part of the download process mentioned in this document. The following conditions shall be applied:

Initial state
<p>The ISD-R shall be installed and first personalized by the EUM during eUICC manufacturing.</p> <p>After eUICC manufacturing, the ISD-R shall be in life-cycle state PERSONALIZED as defined in GlobalPlatform Card Specification [GP CS], section 5.3.</p> <p>The ISD-R privileges shall be granted according to Annex C of [GS RPT]</p>
<p>The ECASD shall be installed and personalized by the EUM during the eUICC manufacturing with:.</p> <ul style="list-style-type: none"> <li>• PK.CI.ECDSA</li> <li>• SK.ECASD.ECKA</li> <li>• CERT.ECASD.ECKA for eUICC Authentication and key establishment</li> <li>• EID</li> </ul> <p>After eUICC manufacturing, the ECASD shall be in life-cycle state PERSONALIZED as defined in GlobalPlatform Card Specification [GP CS], section 5.3.</p>
<p>At least one ISD-P with a Profile shall be installed and first personalized by the EUM during eUICC manufacturing to allow future eUICC connectivity.</p>
<p>According to [GS RPT]:</p> <ul style="list-style-type: none"> <li>• The RID of the Executable Load File, the Executable Module and the Application of the ISD- R and the ECASD shall be set to 'A000000559'. .</li> <li>• The ISD- R Executable Load File AID and the ISD-R Executable Module AID can be freely selected by the EUM.</li> <li>• The ISD-R application AID shall be 'A0 00 00 05 59 10 10 FF FF FF FF 89 00 00 01 00'.</li> <li>• The ECASD Executable Load File AID and the ECASD Executable Module AID can be freely selected by the EUM.</li> </ul>
<p>To enable SCP80, the ISD-R shall be personalized before issuance by the EUM with at least one key set, with a Key Version Number between '01' to '0F' following GlobalPlatform Card Specification UICC Configuration [GP UC].</p>
<p>To enable SCP81, the ISD-R shall be personalized with at least one key set, with a Key Version Number between '40' to '4F' following [GP SE]</p>

Initial state
<p>The following certificates shall be signed and issued by the CI:</p> <ul style="list-style-type: none"> <li>• Self-signed Root Certificate</li> <li>• EUM Certificates</li> <li>• SM-SR Certificates</li> <li>• SM-DP Certificates</li> </ul>
<p>The following certificates shall be signed and issued by the EUM:</p> <ul style="list-style-type: none"> <li>• eUICC Certificates</li> </ul>
<p>The following certificate and key shall be stored in the eUICC:</p> <ul style="list-style-type: none"> <li>• The eUICC Certificate</li> <li>• The Root public key</li> </ul>
<p>The eUICC Certificate is part of the EIS (eUICC Information Set) which is stored in the SM-SR and/or at EUM level. This certificate contains:</p> <ul style="list-style-type: none"> <li>• The PK.ECASN.ECKA used for ElGamal Elliptic Curves key agreement as defined in [GP AE]</li> <li>• The EID</li> </ul>

#### 6.6.1.2. Consumer Device, or IoT Architecture

The eUICC whether it is removable or not has to reside in an initial state to allow download of a profile.

The eUICC based on [GS SGP22] V2.2.1 shall be prepared with certificates and keys defined in [GS SGP26] V1.5.

The eUICC based on [GS SGP22] V2.2.2 shall be prepared with certificates and keys defined in [GS SGP26] V1.5.

The eUICC based on [GS SGP22] V2.3 shall be prepared with certificates and keys defined in [GS SGP26] V1.5.

The eUICC based on [GS SGP22] V2.4 shall be prepared with certificates and keys defined in [GS SGP26] V1.5.

The eUICC based on [GS SGP22] V2.5 shall be prepared with certificates and keys defined in [GS SGP26] V1.5.

The eUICC based on [GS SGP22] V3.1 shall be prepared with certificates and keys defined in [GS SGP26] V3.0.2.

The eUICC based on [GS SGP32] V1.2 shall be prepared with certificates and keys defined in [GS SGP26] V3.0.2.

The following conditions shall be applied:

Initial state
<p>The ISD-R shall be installed and first personalized by the EUM during eUICC manufacturing. After eUICC manufacturing, the ISD-R shall be in life-cycle state PERSONALIZED as defined in GlobalPlatform Card Specification [GP CS], section 5.3. The ISD-R privileges shall be set according to Annex A of [GS SGP22].</p>

### Initial state

The ECASD shall be installed and personalized by the EUM during the eUICC manufacturing.

- For eUICC based on [GS SGP22] v2.x:
  - CERT.EUICC.ECDSA (NIST, or Brainpool ,or FRP256V1)
  - PK.EUICC.ECDSA
  - PK.CI.ECDSA.
  - CERT.EUM.ECDSA (NIST, or Brainpool, or FRP256V1)
  - eUICC Manufacturer's (EUMs) keyset for key/certificate renewal:
    - Renew eUICC's Private Key(s) and Certificate(s)
    - Renew EUM Certificate(s)
    - Renew CI public key(s)
- For eUICC based on [GS SGP22] v3.0, or later:
  - CERT.EUICC.SIG (NIST, or Brainpool ,or FRP256V1, or SM2 Curve)
  - PK.EUICC.SIG
  - PK.CI.SIG
  - CERT.EUM.SIG (NIST, or Brainpool, or FRP256V1, or SM2 Curve)
  - eUICC Manufacturer's (EUMs) keyset for key/certificate renewal:
    - Renew eUICC's Private Key(s) and Certificate(s)
    - Renew EUM Certificate(s)
    - Renew CI public key(s)
- For eUICC based on [GS SGP32] v1.x, or later:
  - CERT.EUICC.SIG (NIST, or Brainpool)
  - PK.EUICC.SIG
  - PK.CI.SIG
  - CERT.EUM.SIG (NIST, or Brainpool)
  - eUICC Manufacturer's (EUMs) keyset for key/certificate renewal:
    - Renew eUICC's Private Key(s) and Certificate(s)
    - Renew EUM Certificate(s)
    - Renew CI public key(s)

After eUICC manufacturing, the ECASD shall be in life-cycle state PERSONALIZED as defined in GlobalPlatform Card Specification [GP CS], section 5.3.

If the eUICC is embedded into a device at least one profile shall be installed and first personalized by the EUM during eUICC manufacturing to allow cellular network connectivity.

According to [GS RPT]:

- The RID of the Executable Load File, the Executable Module and the Application of the ISD- R and the ECASD shall be set to 'A000000559'.
- The ISD- R Executable Load File AID and the ISD-R Executable Module AID can be freely selected by the EUM.
- The ISD-R application AID shall be 'A0 00 00 05 59 10 10 FF FF FF FF 89 00 00 01 00'.
- The ECASD Executable Load File AID and the ECASD Executable Module AID can be freely selected by the EUM.

Initial state
<p>The following certificates shall be signed and issued by the GSMA CI:</p> <ul style="list-style-type: none"> <li>• <u>For a product based on [GS SGP22] v2.x, or [GS SGP32] v1.x:</u> <ul style="list-style-type: none"> <li>• Self-signed Root Certificate</li> <li>• EUM Certificates</li> <li>• SM-DP+ Certificates</li> </ul> </li> <li>• For a product based on [GS SGP22] v3.0; , or later <ul style="list-style-type: none"> <li>• Self-signed Root Certificate</li> <li>• CI SubCA Certificate</li> <li>• EUM CA Certificate</li> <li>• SM-DP+ Certificate</li> <li>• SM-DP+ SubCA Certificates</li> </ul> </li> </ul>
<p>The following certificates shall be signed and issued by the EUM:</p> <ul style="list-style-type: none"> <li>• <u>For a product based on [GS SGP22] v2.x, or [GS SGP32] v1.x:</u> <ul style="list-style-type: none"> <li>• eUICC Certificates</li> </ul> </li> <li>• <u>For a product based on [ GS SGP22] v3.0 , or later</u> <ul style="list-style-type: none"> <li>• EUM SubCA Certificate</li> <li>• eUICC Certificate</li> </ul> </li> </ul>
<p><u>For a product based on [ GS SGP22] v3.0 , or later</u> the following certificates shall be signed and issued by the SM-DP+ SubCA:</p> <ul style="list-style-type: none"> <li>• SM-DP+ Certificates</li> </ul>
<p>For a product based on [GS SGP32] v1.x the eUICC shall not be associated to an initial eIM.</p>

### 6.6.2 General Post Conditions

For each test procedure described in the present document, the following rules apply to the Post Conditions:

- After each test procedure in which a Profile Package is installed and enabled the Profile Package shall be disabled according to 6.12, and deleted according to 6.13.

### 6.6.3 SCP80

In order to validate the result of test procedures (e.g. getting the status of Security Domains, reading Files, getting data from applications) certain operations shall be executed using SCP80. The following conditions shall be applied:

- SPI byte 2 shall be set to '21' (SMS\_SUBMIT)

### 6.6.4 Specific rules for FCP verification

In case of an MF, DF, or ADF the following tags shall be checked by the test tool:

- Tag '82' – File Descriptor
- Tag '83' – File Identifier (for the card it is mandatory to return for MF and DF, it is optional for ADF)
- Tag '84' – DF Name (it is mandatory only for ADF)



- Tag '8A' – Life Cycle Status Integer
- Tag '8B' – Referenced Security Attributes
- Tag 'C6' – PIN Status Template DO

For more details and the specific rules applying please see the following sub chapters in Section 6.6.4.x.

In case of an EF the following tags shall be checked by the test tool:

- Tag '80' – File Size
- Tag '82' – File Descriptor
- Tag '83' – File Identifier
- Tag '88' – Short File Identifier
- Tag '8A' – Life Cycle Status Integer
- Tag '8B' – Referenced Security Attributes
- Tag 'A5' – Proprietary Information

For more details and the specific rules applying please see the following sub chapters in Section 6.6.4.x.

#### 6.6.4.1. Tag 'A5'

For implementations based on [SA PP TS] v2.3.1, or before:

The presence of tag 'A5' in the returned FCP (in consequence the presence of sub tag 'C0') shall not be checked by the test tool even if the returned FCP contains this tag.

For implementations based on [SA PP TS] v3.1, or later:

Except for BER-TLV files, the presence of tag 'A5' in the returned FCP (in consequence the presence of sub tag 'C0') shall not be checked by the test tool even if the returned FCP contains this tag.

If tag 'A5' is returned in the FCP of a BER-TLV file the test tool shall check that:

- tag '83' (Amount of available memory) is present. The value of this tag shall not be checked.
- tag '84' (File Details) is present and verify it's value
- tag '85' (Reserved File Size) is present and verify it's value equals to effFileSize (as configured in profile)
- if maximumFileSize is configured in the profile then tag '86' (Maximum file size) is present and it's value equals to maximumFileSize (as configured in profile)

#### 6.6.4.2. Tag DO '88' (SFI)

Tag DO '88' from the returned FCP of an Elementary File shall be verified based on the definition in ETSI TS 102 221 Section 11.1.1.4.8. Specifically:

I. For an EF created by PE template without shortEFID present in fileDescriptor structure the test tool shall check the SFI value in the returned FCP as follows:

For implementations based on [SA PP TS] v2.1:

- if the SFI value is mandated in the respective file specification and it equals to bits b5 to b1 of the second byte of the file identifier: DO'88' can be absent, or can be present with the correct SFI value. The test tool shall check this. ANNEX B (Normative) : SFI values contains the lists of those files for which the related specification mandates the support of Short File Identifier and also defines a concrete SFI value.
- if the SFI value is mandated in the respective file specification and not equal to bits b5 to b1 of the second byte of the file identifier: DO'88' shall be present with the correct SFI value. The test tool shall check this. ANNEX B (Normative) : SFI values contains the lists of those files for which the related specification mandates the support of Short File Identifier and also defines a concrete SFI value.
- if the SFI is not supported according to the respective file specification: DO'88' shall be present with a length set to zero. The test tool shall check this.
- if the SFI is 'Optional' according to the respective file specification: the test tool shall not check the presence of DO '88'

For implementiations based on [SA PP TS] v2.2 or later:

- if the SFI value is listed in {Annex A of [SA PP TS] v2.2 or later} and it equals to bits b5 to b1 of the second byte of the file identifier: DO'88' can be absent, or can be present with the correct SFI value. The test tool shall check this.
- if the SFI value is listed in {Annex A of [SA PP TS] v2.2 or later} and not equal to bits b5 to b1 of the second byte of the file identifier: DO'88' shall be present with the correct SFI value. The test tool shall check this.
- if the SFI is not listed in {Annex A of [SA PP TS] v2.2 or later}: DO'88' shall be present with a length set to zero. The test tool shall check this.

II. For an EF created by PE template with shortEFID present in fileDescriptor structure the test tool shall check the SFI value in the returned FCP as follows:

- if the shortEFID has no value the DO'88' shall be present with a length set to zero. The test tool shall check this.
- if the shortEFID is present with a length of 1 byte the DO'88' can be absent (only if SFI equals to bits b5 to b1 of the second byte of the FID), or can be present with the correct SFI value. The test tool shall check this.

III. For an EF created by Generic File Management PE-s the test tool shall check the SFI value in the FCP as follows:

- if the shortEFID is not present in the createFCP structure of the EF the DO'88' can be absent, or can be present with the correct SFI value. The test tool shall check this.
- if the shortEFID is present in the createFCP structure of the EF but has no value the DO'88' shall be present with a length set to zero. The test tool shall check this.
- if the shortEFID is present in the createFCP structure of the EF with a length of 1 byte the DO'88' can be absent (only if SFI equals to bits b5 to b1 of the second byte of the FID), or can be present with the correct SFI value. The test tool shall check this.

#### 6.6.4.3. Files created based on a PE Template

The test tool shall verify the FCP of those files **also** which are created based on a PE template. If fcp parameters are not provided in the Test PE the default parameters defined in Annex A of [SA PP TS] shall be verified by the test tool. It applies to the EFs, MF, ADFs and DF-s also.

#### 6.6.4.4. Verify that all the files are created

The test tool shall check that all the files specified in the specific file system PE are created.

The test tool shall allow other (eg: proprietary) files to be created, except:

- files tagged with "doNotCreate" in the PE
- files defined in Not created by default templates, but not listed in the PE.

#### 6.6.4.5. Tag '82' (File Descriptor)

For any file created by PE template without fileDescriptor parameter present in the fileDescriptor structure the test tool shall check the File descriptor byte in the returned FCP considering the following specific rules:

- both Working EF and Internal EF shall be accepted when checking the File type for an elementary file (EF)

For implementiations based on [SA PP TS] v2.1 and v2.2:

- the value of File accessibility shall not be checked for any file (EF, DF, or ADF)

For implementiations based on [SA PP TS] v2.3 or later:

-the value of File accessibility shall be checked and the value shall be verified according to the definition in Annex A 9.1 of [SA PP TS] v2.3

#### 6.6.4.6. Tag 'C6' (PIN Status Template DO)

For an MF/DF/ADF the PS Template DO returned in the FCP shall contain all those key reference values which are present in the "pinStatusTemplateDO" of this MF/DF/ADF in the profile and refer to a global (level 1) PIN, or a local (level 2) PIN. The test tool shall check this.

Note: see ETSI TS 102 221 for the definition of level 1 and level 2 PIN.

Any key reference value in the PS Template DO which is for an administrative key shall not be checked by the test tool.

Additionally the PS Template DO returned in the FCP may also contain some additional key reference values. It shall not cause a test case to be failed.

#### 6.6.4.7 EF (UMPC)

For EF (UMPC) the Test Tool shall not check the returned FCP, only the presence of the file.

#### 6.6.4.8 Tag '80'

In case of BER-TLV files the value of Tag '80' shall match with the actual length of the content (ie the length of 'fillFileContent' in case of the BER-TLV files in this document).

### 6.6.5 **Specific rules for file content verification**

#### 6.6.5.1. Files created based on a PE Template

The test tool shall verify the content of those files also which are created based on a PE template. If the content is not provided in the Test PE the default content defined in Annex A of [SA PP TS] shall be verified by the test tool.

#### 6.6.5.2. BER-TLV files created without TLV content

In case of BER-TLV files created without content (e.g. FF..FF value, or no TLV) the test tool has to validate that the BER-TLV file is created and no content is present instead of validating the content of the file. This is possible by using RETRIEVE DATA command with Tag '5C' (Tag List). The expected result is an empty tag list TLV.

#### 6.6.5.3. PIN Verification

When using ISO interface for file content verification the test tool shall verify the PIN that is required in order to be able to read and verify the file content.

### 6.6.6 **Specific rules for checking the returned status**

For those cases when PEStatus containing status ok (0) is expected the eUICC may return a warning status before returning the ok status. This is allowed and it shall not cause the test case to be failed.

For those cases when warning status is expected:

For implementiations based on [SA PP TS] v2.1:

-the eUICC may return an ok status after returning the warning status. This is allowed and it shall not cause the test case to be failed.

For implementiations based on [SA PP TS] v2.2, or later:

-the eUICC shall return an ok status after returning the warning status. It shall be checked by the test tool.

### **6.6.7 ISO interface**

The following APDU commands used during test execution have to be sent to the eUICC using the ISO interface:

AUTHENTICATE  
 VERIFY PIN  
 DISABLE PIN  
 CHANGE PIN  
 UNBLOCK PIN

### **6.6.8 Specific rules for checking the returned tags of GET STATUS command**

The response of the GET STATUS may contain additional tags besides those specified in the test step descriptions, except when a tag list (tag '5C') is present in the command data field. The test tool shall ignore these additional tags returned, except when a tag list (tag '5C') is present in the command data field. When a tag list (tag '5C') is present in the command data field and additional tags are returned the test case will fail.

### **6.6.9 Specific rules for checking the length of the statusMessage field**

For implementiations based on [SA PP TS] v2.3.1, or later:

If present, the statusMessage field shall be from 2 to 64 Unicode code points long inclusive. The test tool shall check this.

### **6.6.10 Specific rules for checking the offset field**

For implementiations based on [SA PP TS] v3.1, or earlier:

-the eUICC may return optionally an offset value in PESTatus. This is allowed and it shall not cause the test case to be failed.

For implementiations based on [SA PP TS] v3.2, or later:

-the eUICC shall return an offset value in PESTatus when the installation of the Profile is aborted. Unless otherwise specified the presence of the offset field shall be checked by the test tool, but the value of the offset field shall not be checked.

## **6.7 Pass criterion**

A test shall be considered successful, only if the test procedure was carried out successfully with the IUT respecting all conformance requirements referenced in the test procedure.

## **6.8 VOID**

## 6.9 eUICC Initialisation Procedures

This procedure shall be applied by the test tool only when the eUICC under test is in an unsoldered format. When the eUICC under test is embedded in a device, the initialisation procedure is accomplished by the device.

To initialise the communication between T and the eUICC, these commands shall be executed:

Step	Direction	Description	RQ
1	T → eUICC	RESET	
2	eUICC → T	ATR	
3	T → eUICC	SELECT MF	
4	eUICC → T	FCP template is present SW='9000'	
5	T → eUICC	[TERMINAL_CAPABILITY] (See Note 1)	
6	eUICC → T	SW='9000' (See Note 1)	
7	T → eUICC	[TERMINAL_PROFILE]	
8	eUICC → T	Toolkit initialization  (See Note 2 and Note 3)	

Note 1: The TERMINAL CAPABILITY command shall only be sent when support of that command is indicated in the FCP of the MF.

Unless otherwise specified the value of the [TERMINAL\_PROFILE] shall indicate support only for the following CAT facilities:

- First byte (Download)
  - Profile download
  - SMS-PP data download
  - Timer expiration
- Second byte (Other)
  - Command result
- Third byte (Proactive UICC)
  - Proactive UICC: POLL INTERVAL
  - Proactive UICC: POLLING OFF
  - Proactive UICC: REFRESH
- Fourth byte (Proactive UICC)
  - Proactive UICC: SEND SHORT MESSAGE with 3GPP-SMS-TPDU
  - Proactive UICC: PROVIDE LOCAL INFORMATION (MCC, MNC, LAC, Cell ID & IMEI)
  - Proactive UICC: PROVIDE LOCAL INFORMATION (NMR)
- Fifth byte (Event driven information)
  - Proactive UICC: SET UP EVENT LIST
  - Event: Location status
  - Event: Call connected
  - Event: Call disconnected
- Sixth byte (Event driven information extensions)
  - Event: Data available
  - Event: Channel status
  - Event: Access Technology Change
- Eighth byte (Proactive UICC)

- Proactive UICC: TIMER MANAGEMENT (start, stop)
  - Proactive UICC: PROVIDE LOCAL INFORMATION (date, time and time zone)
- Ninth byte (Proactive UICC)
  - Proactive UICC: PROVIDE LOCAL INFORMATION (NMR)
  - Proactive UICC: PROVIDE LOCAL INFORMATION (Access Technology)
- Twelfth byte (Bearer Independent protocol proactive commands, class "e")
  - Proactive UICC: OPEN CHANNEL
  - Proactive UICC: CLOSE CHANNEL
  - Proactive UICC: RECEIVE DATA
  - Proactive UICC: SEND DATA
  - Proactive UICC: GET CHANNEL STATUS
- Thirteenth byte (Bearer Independent protocol supported bearers, class "e")
  - GPRS
  - Number of channels supported by terminal: 1 or more
- Seventeenth byte (Bearer independent protocol supported transport interface/bearers, class "e")
  - TCP, UICC in client mode, remote connection
  - UDP, UICC in client mode, remote connection
  - E-UTRAN
  - HSDPA
- Twenty-third byte:
  - Proactive UICC: PROVIDE LOCAL INFORMATION (NMR(UTRAN/E-UTRAN))
- Twenty-fifth byte (Event driven information extensions)
  - Event: Network Rejection

When testing implementations according to [GS RPT], or [GS SGP22] the value of the [TERMINAL\_CAPABILITY] is: CLA = 80; INS = AA; P1 = 00; P2 = 00; LC = <L>;  
Data = A9 05 81 00 83 01 07.

When testing implementations according to [GS SGP32] the value of the [TERMINAL\_CAPABILITY] is: CLA = 80; INS = AA; P1 = 00; P2 = 00; LC = <L>;  
Data = A9 05 81 00 84 01 01.

Note 2: It is assumed that some proactive commands may be sent by the eUICC after sending the TERMINAL PROFILE (i.e. SET UP EVENT LIST, POLL INTERVAL, PROVIDE LOCAL INFORMATION...). In this case, T shall send the corresponding FETCH and TERMINAL RESPONSE (successfully performed) commands.

Note 3: When testing implementations according to [GS RPT] and a notification is expected it MAY be necessary to send an ENVELOPE (EVENT DOWNLOAD - Location status) indicating "normal service" (i.e. '00') in order to trigger the sending of the eUICC notification. This envelope SHALL be sent only if this event (i.e. encoded with the value '03') is present in the SET UP EVENT LIST sent by the eUICC. Moreover, the eUICC MAY also wait for several STATUS events before issuing the notification (within a maximum time interval of 10 STATUS events).

### **6.10 Profile loading**

Profile packages shall be loaded using the respective standard procedures supported by the eUICC (e.g. [GS RPT], or [GS SGP22], or [GS SGP32]).

### **6.11 Profile enabling**

Profile packages shall be enabled using the respective standard procedures supported by the eUICC (e.g. [GS RPT], or [GS SGP22], or [GS SGP32]).

### **6.12 Profile disabling**

Profile packages shall be disabled using the respective standard procedures supported by the eUICC (e.g. [GS RPT], or [GS SGP22], or [GS SGP32]).

### **6.13 Profile deleting**

Profile packages shall be deleted using the respective standard procedures supported by the eUICC (e.g. [GS RPT], or [GS SGP22], or [GS SGP32]).

## 6.14 Test PE description

The Test PEs described in this chapter are provided also as ASN1 files and are available for download on the TCA website. These ASN1 files shall be used to create the DER codes.

Unless otherwise stated when creating DER codes the asn1 definition Profile Interoperability Technical Specification\_V3.3.1.asn shall be used. The Profile Interoperability Technical Specification\_V3.3.1.asn is part of eUICC Profile Package: Interoperable Format Technical Specification v3.3.1 and available for download on the TCA website.

When creating the DER code of PE-5GS-by-Template-1 the asn1 definition Profile Interoperability Technical Specification\_V2.3.1.asn shall be used. The Profile Interoperability Technical Specification\_V2.3.1.asn is part of eUICC Profile Package: Interoperable Format Technical Specification v2.3.1 and available for download on the TCA website.

When creating the DER code for Test Case 8.2.11.4 at least the DF-CUSTOM-by-Generic-File-Management-4 shall be created using PEdDefinitions V2.100\_with\_unknownTag.asn for Profile Package v2 and PEdDefinitions V3.3.100\_with\_unknownTag.asn for Profile Package v3. The PEdDefinitions V2.100\_with\_unknownTag.asn and PEdDefinitions V3.3.100\_with\_unknownTag.asn are part of eUICC Profile Package: Interoperable Format Test Specification Version 3.3.1 and available for download on the TCA website.

The parameters below have been chosen to personalise the Profile:

- Profile type: "TCA Profile Package".
- ICCID: '89019990001234567893'.
- IMSI: 234101943787656.
- NSI: user17@example.com
- IMPI: 001010123456789@test.3gpp.com
- IMPU: sip:user@test.3gpp.com
- UIM ID: '0102030405060708'
- MNO-SD AID / TAR value: 'A000000151000000' / 'B20100'.
- RFM application AID / TAR values: 'A00000055910100001' / 'B00000' , 'A00000055910100002' / 'B00002' and 'A00000055910100004' / 'B00140' and 'A00000055910100005' / 'B00150'
- Executable Load File AID for SD: 'A0000001515350'.
- Executable Module AID for SD: 'A000000151535041'.
- SSD AID / TAR values: 'A00000055910100102736456616C7565' / '6C7565' and 'A00000055910100102736456616C7566' / '6C7566'.



If not stated otherwise access rules are taken from section “Access Rules Definition” of [SA PP TS].

Two additional Access Rules are used in this specification:

**Table 4: Additional Access Rules**

File Access Conditions						Access Rules	Values
Read	Update	Incr.	Act.	Deact.	Delete		
ALWAYS	PIN 1 OR PIN 2	NEVER	ADM 1	ADM 1	ADM 1	15	8001019000800102A010A406830101950108A406830102950108800158A40683010A950108
ALWAYS	PIN 1 AND ADM 1	NEVER	ADM 1	ADM 1	ADM 1	16	8001019000800102AF10A406830101950108A40683010A950108800158A40683010A950108

### 6.14.1 Profile Header

When testing implementations according to [GS SGP22] the Profile Headers defined in this Section SHALL not contain the connectivityParameters data object.

#### 6.14.1.1. Profile-Header-1

Default Profile Header for USIM.

##### Profile-Header-1

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.2. Profile-Header-2

It contains the MF ID and CD ID and TELECOM ID and USIM ID in eUICC-Mandatory-GFSTEList.

##### Profile-Header-2

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- CD-ID
    {2 23 143 1 2 2 },
    -- TELECOM-ID
    {2 23 143 1 2 3 },
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

### 6.14.1.3. Profile-Header-3

It contains an unsupported major version.

#### Profile-Header-3

```
headerValue ProfileElement ::= header : {
  major-version 255,
  minor-version 2,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

### 6.14.1.4. Profile-Header-4

It contains an unsupported template.

#### Profile-Header-4

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
  },
  eUICC-Mandatory-GFSTEList {
    { 2 999 1 }
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

### 6.14.1.5. Profile-Header-5

It contains ber-tlv in eUICC-Mandatory-services and MF ID and CD ID and TELECOM ID and USIM ID and OPT-USIM ID in eUICC-Mandatory-GFSTEList. It is compatible for versions from v2.1 of [SA PP TS].

#### Profile-Header-5

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    ber-tlv NULL
  },
  eUICC-Mandatory-GFSTEList {
    { 2 23 143 1 2 1 }, --id-MF
    { 2 23 143 1 2 2 }, --id CD
    { 2 23 143 1 2 3 }, --id TELECOM
  }
}
```

```

    { 2 23 143 1 2 4 }, --id-USIM
    { 2 23 143 1 2 5 } --id-OPTUSIM

},
-- SMS parameters
connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.6. Profile-Header-6

It contains dfLink in eUICC-Mandatory-services and MF ID, CD ID, TELECOM ID and USIM ID in eUICC-Mandatory-GFSTEList. It is compatible for versions from v2.1 of [SA PP TS]

##### Profile-Header-6

```

headerValue ProfileElement ::= header : {
    major-version 2,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL,
        dfLink NULL
    },
    eUICC-Mandatory-GFSTEList {
        { 2 23 143 1 2 1 }, --id-MF
        { 2 23 143 1 2 2 }, --id CD
        { 2 23 143 1 2 3 }, --id TELECOM
        { 2 23 143 1 2 4 } --id-USIM
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.7. Profile-Header-7

It contains tuak128 in eUICC-Mandatory-services

##### Profile-Header-7

```

headerValue ProfileElement ::= header : {
    major-version 2,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        tuak128 NULL
    },
    eUICC-Mandatory-GFSTEList {
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.8. Profile-Header-8

It contains csim and cave in eUICC-Mandatory-services and id-CSIM in GFSTEList.

##### Profile-Header-8

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    csim NULL,
    cave NULL
  },
  eUICC-Mandatory-GFSTEList {
    { 2 23 143 1 2 1 }, --id-MF
    { 2 23 143 1 2 10 }, --id-CSIM
    { 2 23 143 1 2 11 } --id-OPTCSIM
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.9. Profile-Header-9

It contains isim in eUICC-Mandatory-services and MF ID and CD ID and TELECOM ID and USIM ID and OPT-USIM ID and ISIM ID and OPT-ISIM ID in eUICC-Mandatory-GFSTEList.

##### Profile-Header-9

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    isim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    { 2 23 143 1 2 1 }, --id-MF
    { 2 23 143 1 2 2 }, --id CD
    { 2 23 143 1 2 3 }, --id TELECOM
    { 2 23 143 1 2 4 }, --id-USIM
    { 2 23 143 1 2 5 }, --id-OPT-USIM
    { 2 23 143 1 2 8 }, --id-ISIM
    { 2 23 143 1 2 9 } --id-OPT-ISIM
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.10. Profile-Header-10

It contains usim-test-algorithm in eUICC-Mandatory-services

##### Profile-Header-10

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    usim-test-algorithm NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.11. Profile-Header-11

It contains tuak256 in eUICC-Mandatory-services

##### Profile-Header-11

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    tuak256 NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.12. Profile-Header-12

It contains contactless in eUICC-Mandatory-services

##### Profile-Header-12

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    contactless NULL,
    usim NULL,
    milenage NULL,
    javacard NULL
  },
  eUICC-Mandatory-GFSTEList {
```

```

},
-- SMS parameters
connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.13. Profile-Header-13

It contains cat-tp in eUICC-Mandatory-services

##### Profile-Header-13

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    cat-tp NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.14. Profile-Header-14

It contains an unknown package AID ('A0100000620101') in eUICC-Mandatory-AIDs

##### Profile-Header-14

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    javacard NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H,
  eUICC-Mandatory-AIDs {
    {
      aid 'A0100000620101'H,
      version '0101'H
    }
  }
}

```

### 6.14.1.15. [Profile-Header-15](#)

It contains an unsupported package version (javacard.framework v9.4) in eUICC-Mandatory-AIDs

#### Profile-Header-15

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    javacard NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H,
  eUICC-Mandatory-AIDs {
    {
      aid 'A0000000620101'H,
      version '0904'H
    }
  }
}
```

### 6.14.1.16. [Profile-Header-16](#)

It contains known and supported package AIDs and versions (javacard.framework v1.4 and java.lang v1.0) in eUICC-Mandatory-AIDs

#### Profile-Header-16

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    javacard NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H,
  eUICC-Mandatory-AIDs {
    {
      aid 'A0000000620101'H,
      version '0104'H
    },
    {
      aid 'A0000000620001'H,
      version '0100'H
    }
  }
}
```



### 6.14.1.17. Profile-Header-17

It contains the MF ID and CD ID and TELECOM ID and USIM ID and OPT-USIM ID and GSM-ACCESS ID in eUICC-Mandatory-GFSTEList.

#### Profile-Header-17

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- CD-ID
    {2 23 143 1 2 2 },
    -- TELECOM-ID
    {2 23 143 1 2 3 },
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5},
    -- GSM-ACCESS-ID
    {2 23 143 1 2 7}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

### 6.14.1.18. Profile-Header-18

It contains the MF ID and CD ID and TELECOM ID and USIM ID and OPT-USIM ID and PHONEBOOK ID in eUICC-Mandatory-GFSTEList.

#### Profile-Header-18

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- CD-ID
    {2 23 143 1 2 2 },
    -- TELECOM-ID
    {2 23 143 1 2 3 },
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5},
    -- PHONEBOOK-ID
    {2 23 143 1 2 6}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

```

-- PHONEBOOK-ID
{2 23 143 1 2 6}
},
-- SMS parameters
connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.19. Profile-Header-19

It contains the MF ID and CD ID and TELECOM ID and USIM ID and EAP ID in eUICC-Mandatory-GFSTEList.

#### Profile-Header-19

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- CD-ID
    {2 23 143 1 2 2 },
    -- TELECOM-ID
    {2 23 143 1 2 3},
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5},
    -- EAP- ID
    {2 23 143 1 2 12}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.20. Profile-Header-20

It has minor version '100' and contains the MF ID and CD ID and TELECOM ID and USIM ID and OPT-USIM ID in eUICC-Mandatory-GFSTEList.

#### Profile-Header-20

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 100,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- CD-ID
    {2 23 143 1 2 2},

```

```

-- TELECOM-ID
{2 23 143 1 2 3},
-- USIM-ID
{2 23 143 1 2 4},
-- OPT-USIM-ID
{2 23 143 1 2 5}
},
-- SMS parameters
connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.21. Profile-Header-21

It contains the MF ID and USIM ID in eUICC-Mandatory-GFSTEList.

##### Profile-Header-21

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- USIM-ID
    {2 23 143 1 2 4}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.22. Profile-Header-22

It contains contactless in eUICC-Mandatory-services and the MF ID and USIM ID in eUICC-Mandatory-GFSTEList.

##### Profile-Header-22

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    contactless NULL,
    usim NULL,
    milenage NULL,
    javacard NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- USIM-ID
    {2 23 143 1 2 4}
  },
}

```

```
-- SMS parameters
connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.23. Profile-Header-23

The content is identical to 6.14.1.2 Profile-Header-2 adding support of tuak128 and multiple-usim.

#### Profile-Header-23

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    tuak128 NULL,
    multiple-usim NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- CD-ID
    {2 23 143 1 2 2},
    -- TELECOM-ID
    {2 23 143 1 2 3},
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.24. Profile-Header-24

It contains

- get-identity and profile-a-x25519 in eUICC-Mandatory-services list
- the MF ID, the TELECOM ID, the USIM ID, the OPT USIM ID, the DF 5GS ID and the DF SAIP ID in eUICC-Mandatory-GFSTEList.

#### Profile-Header-24

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    get-identity NULL,
    profile-a-x25519 NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- TELECOM-ID
```

```

    {2 23 143 1 2 3},
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5},
    -- DF 5GS
    {2 23 143 1 2 13},
    -- DF SAIP
    {2 23 143 1 2 14}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.25. Profile-Header-25

It contains

- get-identity and profile-b-p256 in eUICC-Mandatory-services list
- the MF ID, the TELECOM ID, the USIM ID, the OPT USIM ID, the DF 5GS ID and the DF SAIP ID in eUICC-Mandatory-GFSTEList.

#### Profile-Header-25

```

headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    get-identity NULL,
    profile-b-p256 NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- TELECOM-ID
    {2 23 143 1 2 3},
    -- USIM-ID
    {2 23 143 1 2 4},
    -- OPT-USIM-ID
    {2 23 143 1 2 5},
    -- DF 5GS
    {2 23 143 1 2 13},
    -- DF SAIP
    {2 23 143 1 2 14}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}

```

#### 6.14.1.26. Profile-Header-26

It contains

- get-identity in eUICC-Mandatory-services list
- the MF ID, the TELECOM ID, the USIM ID, the OPT USIM ID, the DF 5GS ID and the DF SAIP ID in eUICC-Mandatory-GFSTEList.

### Profile-Header-26

```
headerValue ProfileElement ::= header : {
    major-version 2,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL,
        get-identity NULL
    },
    eUICC-Mandatory-GFSTEList {
        -- MF-ID
        {2 23 143 1 2 1},
        -- TELECOM-ID
        {2 23 143 1 2 3},
        -- USIM-ID
        {2 23 143 1 2 4},
        -- OPT-USIM-ID
        {2 23 143 1 2 5},
        -- DF 5GS
        {2 23 143 1 2 13},
        -- DF SAIP
        {2 23 143 1 2 14}
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.27. Profile-Header-27

Same as Profile-Header-1 but contains javacard in eUICC-Mandatory-services.

### Profile-Header-27

```
headerValue ProfileElement ::= header : {
    major-version 2,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL,
        javacard NULL
    },
    eUICC-Mandatory-GFSTEList {
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.28. Profile-Header-1-v3

The content is identical to 6.14.1.1 Profile-Header-1, except:

-the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.29. Profile-Header-2-v3

The content is identical to 6.14.1.2 Profile-Header-2, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.30. Profile-Header-3-v3

The content is identical to 6.14.1.3 Profile-Header-3.

#### 6.14.1.31. Profile-Header-4-v3

The content is identical to 6.14.1.4 Profile-Header-4, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.32. Profile-Header-5-v3

The content is identical to 6.14.1.5 Profile-Header-5, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.33. Profile-Header-6-v3

The content is identical to 6.14.1.6 Profile-Header-6, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}

#### 6.14.1.34. Profile-Header-7-v3

The content is identical to 6.14.1.7 Profile-Header-7, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.35. Profile-Header-8-v3

The content is identical to 6.14.1.8 Profile-Header-8, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of CSIM which equals {2 23 143 1 2 10 2}
- the value of templateID field of OPT-CSIM which equals {2 23 143 1 2 11 2}

#### 6.14.1.36. Profile-Header-9-v3

The content is identical to 6.14.1.9 Profile-Header-9, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}
- the value of templateID field of OPT-ISIM which equals {2 23 143 1 2 9 2}

#### 6.14.1.37. Profile-Header-10-v3

The content is identical to 6.14.1.10 Profile-Header-10, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.38. Profile-Header-11-v3

The content is identical to 6.14.1.11 Profile-Header-11, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.39. Profile-Header-12-v3

The content is identical to 6.14.1.12 Profile-Header-12, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.40. Profile-Header-13-v3

The content is identical to 6.14.1.13 Profile-Header-13, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.41. Profile-Header-14-v3

The content is identical to 6.14.1.14 Profile-Header-14, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'



#### 6.14.1.42. Profile-Header-15-v3

The content is identical to 6.14.1.15 Profile-Header-15, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.43. Profile-Header-16-v3

The content is identical to 6.14.1.16 Profile-Header-16, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.44. Profile-Header-17-v3

The content is identical to 6.14.1.17 Profile-Header-17, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.45. Profile-Header-18-v3

The content is identical to 6.14.1.18 Profile-Header-18, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.46. Profile-Header-19-v3

The content is identical to 6.14.1.19 Profile-Header-19, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.47. Profile-Header-20-v3

The content is identical to 6.14.1.20 Profile-Header-20, except:

- the value of major-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.48. Profile-Header-21-v3

The content is identical to 6.14.1.21 Profile-Header-21, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}

#### 6.14.1.49. Profile-Header-22-v3

The content is identical to 6.14.1.22 Profile-Header-22, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}

#### 6.14.1.50. Profile-Header-23-v3

The content is identical to 6.14.1.23 Profile-Header-23, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}

#### 6.14.1.51. Profile-Header-24-v3

The content is identical to 6.14.1.24 Profile-Header-24, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}
- the value of templateID field of DF-5GS which equals {2 23 143 1 2 13 3}

#### 6.14.1.52. Profile-Header-25-v3

The content is identical to 6.14.1.25 Profile-Header-25, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}
- the value of templateID field of DF-5GS which equals {2 23 143 1 2 13 3}

#### 6.14.1.53. [Profile-Header-26-v3](#)

The content is identical to 6.14.1.26 Profile-Header-26, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}
- the value of templateID field of DF-5GS which equals { 2 23 143 1 2 13 3}

#### 6.14.1.54. [Profile-Header-27-v3](#)

The content is identical to 6.14.1.27 Profile-Header-27, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.55. [Profile-Header-28](#)

Profile Header with profileType of one hundred Latin symbols.

##### Profile-Header-28

```
headerValue ProfileElement ::= header : {
    major-version 2,
    minor-version 3,
    profileType "TCA Interop Profile Package with a longest
possible profileType value of exactly one hundred
symbols",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL
    },
    eUICC-Mandatory-GFSTEList {
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.56. [Profile-Header-28-v3](#)

The content is identical to 6.14.1.55 Profile-Header-28, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'

#### 6.14.1.57. [Profile-Header-29-v3](#)

The content is identical to 6.14.1.26 Profile-Header-26, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 2}
- the value of templateID field of DF-5GS which equals { 2 23 143 1 2 13 2}

#### 6.14.1.58. Profile-Header-30-v3

It contains dns-resolution in eUICC-Mandatory-services.

##### Profile-Header-30-v3

```
headerValue ProfileElement ::= header : {
  major-version 3,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    dns-resolution NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.59. Profile-Header-31

It contains javacard in eUICC-Mandatory-services and the MF ID and USIM ID in eUICC-Mandatory-GFSTEList.

##### Profile-Header-31

```
headerValue ProfileElement ::= header : {
  major-version 2,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    javacard NULL
  },
  eUICC-Mandatory-GFSTEList {
    -- MF-ID
    {2 23 143 1 2 1},
    -- USIM-ID
    {2 23 143 1 2 4}
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.60. Profile-Header-31-v3

The content is identical to 6.14.1.59 Profile-Header-31, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}

#### 6.14.1.61. Profile-Header-32

The content is identical to 6.14.1.9 Profile-Header-9, except:  
-the gba-isim is added in eUICC-Mandatory-services

##### Profile-Header-32

```
headerValue ProfileElement ::= header : {  
    major-version 2,  
    minor-version 3,  
    profileType "TCA Profile Package",  
    iccid '89019990001234567893'H,  
    eUICC-Mandatory-services {  
        usim NULL,  
        isim NULL,  
        milenage NULL,  
        gba-isim NULL  
    },  
    eUICC-Mandatory-GFSTEList {  
        { 2 23 143 1 2 1 }, --id-MF  
        { 2 23 143 1 2 2 }, --id-CD  
        { 2 23 143 1 2 3 }, --id-TELECOM  
        { 2 23 143 1 2 4 }, --id-USIM  
        { 2 23 143 1 2 5 }, --id-OPT-USIM  
        { 2 23 143 1 2 8 }, --id-ISIM  
        { 2 23 143 1 2 9 } --id-OPT-ISIM  
    },  
    -- SMS parameters  
    connectivityParameters 'A0090607914486994211F0'H  
}
```

### 6.14.1.62. Profile-Header-32-v3

The content is identical to 6.14.1.36 Profile-Header-9-v3, except:  
-the gba-isim and ber-tlv are added in eUICC-Mandatory-services

#### Profile-Header-32-v3

```
headerValue ProfileElement ::= header : {
  major-version 3,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    isim NULL,
    milenage NULL,
    gba-isim NULL,
    ber-tlv NULL
  },
  eUICC-Mandatory-GFSTEList {
    { 2 23 143 1 2 1 }, --id-MF
    { 2 23 143 1 2 2 }, --id-CD
    { 2 23 143 1 2 3 2 }, --id-TELECOM
    { 2 23 143 1 2 4 2 }, --id-USIM
    { 2 23 143 1 2 5 2 }, --id-OPT-USIM
    { 2 23 143 1 2 8 }, --id-ISIM
    { 2 23 143 1 2 9 2 } --id-OPT-ISIM
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

### 6.14.1.63. Profile-Header-33-v3

The content is identical to 6.14.1.28 Profile-Header-1-v3 but contains scp11ac in eUICC-Mandatory-services.

#### Profile-Header-33-v3

```
headerValue ProfileElement ::= header : {
  major-version 3,
  minor-version 3,
  profileType "TCA Profile Package",
  iccid '89019990001234567893'H,
  eUICC-Mandatory-services {
    usim NULL,
    milenage NULL,
    scp11ac NULL
  },
  eUICC-Mandatory-GFSTEList {
  },
  -- SMS parameters
  connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.64. [Profile-Header-34-v3](#)

The content is identical to 6.14.1.28 Profile-Header-1-v3 but contains scp11ac and scp11c-authorization-mechanism in eUICC-Mandatory-services.

##### Profile-Header-34-v3

```
headerValue ProfileElement ::= header : {
    major-version 3,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL,
        scp11ac NULL,
        scp11c-authorization-mechanism NULL
    },
    eUICC-Mandatory-GFSTEList {
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.65. [Profile-Header-35-v3](#)

The content is identical to 6.14.1.28 Profile-Header-1-v3 but contains scp11ac and s16mode in eUICC-Mandatory-services.

##### Profile-Header-35-v3

```
headerValue ProfileElement ::= header : {
    major-version 3,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL,
        scp11ac NULL,
        s16mode NULL
    },
    eUICC-Mandatory-GFSTEList {
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}
```

#### 6.14.1.66. [Profile-Header-36-v3](#)

The content is identical to 6.14.1.5 Profile-Header-5, except:

- the value of major-version shall be '3' and the value of the minor-version shall be '3'
- the value of templateID field of TELECOM which equals {2 23 143 1 2 3 2}

- the value of templateID field of USIM which equals {2 23 143 1 2 4 2}
- the value of templateID field of OPT-USIM which equals {2 23 143 1 2 5 3}

#### 6.14.1.67 Profile-Header-37-v3

##### Profile-Header-37-v3

```
headerValue ProfileElement ::= header : {
    major-version 3,
    minor-version 3,
    profileType "TCA Profile Package",
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
        usim NULL,
        milenage NULL,
        get-identity NULL
    },
    eUICC-Mandatory-GFSTEList {
        -- MF-ID
        {2 23 143 1 2 1},
        -- TELECOM-ID
        {2 23 143 1 2 3 2},
        -- USIM-ID
        {2 23 143 1 2 4 2},
        -- OPT-USIM-ID
        {2 23 143 1 2 5 2},
        -- DF 5GS
        {2 23 143 1 2 13 4},
        -- DF SAIP
        {2 23 143 1 2 14},
        -- DF SNPN
        {2 23 143 1 2 15}
    },
    -- SMS parameters
    connectivityParameters 'A0090607914486994211F0'H
}
```



## 6.14.2 File System

### 6.14.2.1. MF

#### 6.14.2.1.1. PE-MF-by-Template-1

#### PE-MF-by-Template-1

```

mfVal ProfileElement ::= mf : {
  mf-header {
    mandated NULL,
    identification 211
  },
  templateID { 2 23 143 1 2 1 },
  mf {
    fileDescriptor : {
      pinStatusTemplateDO '01020A'H
    }
  },
  ef-pl {
    fileDescriptor : {
      -- EF_PL modified to use Access Rule 15 within EF_ARR
      securityAttributesReferenced '0F'H
    },
  },
  ef-iccid {
    fileDescriptor : {
      -- use Access Rule 16 within EF_ARR
      securityAttributesReferenced '10'H
    },
  },
  -- swapped ICCID: 98109909002143658739
  fillFileContent : '98109909002143658739'H
},
  ef-dir {
    fileDescriptor : {
      -- Shareable Linear Fixed File
      -- 4 records, record length: 38 bytes
      fileDescriptor '42210026'H,
      efFileSize '98'H
    },
  },
  -- USIM AID: A0000000871002FF33FF018900000100
  fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFFFFFF'H
},
  ef-arr {
    fileDescriptor : {
      -- Shareable Linear Fixed File
      -- 16 records, record length: 37 bytes
      -- ARR created with content recommended in Annex A
      (Section 9.9) of [SA PP TS] plus two additional records
      for use with EF_PL and EF ICCID
      fileDescriptor '42210025'H,
      efFileSize '0250'H
    },
  },
  fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
  fillFileOffset : 10,
  fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
  fillFileOffset : 15,
  fillFileContent : '80015BA40683010A950108'H,
  fillFileOffset : 26,

```

```

    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

#### 6.14.2.1.2.

#### MF-by-Generic-File-Management-1

### MF-by-Generic-File-Management-1

```

altMFVal ProfileElement ::= genericFileManagement : {
  gfm-header {
    mandated NULL,
    identification 212
  },
  fileManagementCMD {
    {
-- create MF
      createFCP : {
        fileDescriptor '7821'H,
        fileID '3F00'H,
        securityAttributesReferenced '0E'H,
        pinStatusTemplateDO '01020A'H
      },
-- create PL
      createFCP : {

```

```

        fileDescriptor '4121'H,
        fileID '2F05'H,
        securityAttributesReferenced '0F'H,
        efFileSize '03'H,
        shortEFID '28'H
    },
-- create ICCID
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2FE2'H,
        securityAttributesReferenced '10'H,
        efFileSize '0A'H
    },
-- swapped ICCID: 98109909002143658739
    fillFileContent : '98109909002143658739'H,
-- create DIR
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
    createFCP : {
        fileDescriptor '42210026'H,
        fileID '2F00'H,
        securityAttributesReferenced '0A'H,
        efFileSize '98'H,
        shortEFID 'F0'H
    },
-- USIM AID: A0000000871002FF33FF018900000100
    fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494D'H,
-- create ARR
    createFCP : {
-- Shareable Linear Fixed File
-- 15 records, record length: 37 bytes
        fileDescriptor '42210025'H,
        fileID '2F06'H,
        securityAttributesReferenced '0A'H,
        efFileSize '0250'H
    },
    fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,

```

```

    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|
PIN Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H,
-- create UMPC
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2F08'H,
        securityAttributesReferenced '0A'H,
        efFileSize '05'H
    }
}
}
}

```

### 6.14.2.1.3.

### PE-MF-by-Template-2

It contains USIM AID and ISIM AID in EF DIR.

#### PE-MF-by-Template-2

```

mfVal ProfileElement ::= mf : {
    mf-header {
        mandated NULL,
        identification 213
    },
    templateID { 2 23 143 1 2 1 },
    mf {
        fileDescriptor : {
            pinStatusTemplateDO '01020A'H
        }
    },
    ef-pl {
        fileDescriptor : {
-- EF_PL modified to use Access Rule 15 within EF_ARR
            securityAttributesReferenced '0F'H
        }
    },
    ef-iccid {
        fileDescriptor : {
-- use Access Rule 16 within EF_ARR
            securityAttributesReferenced '10'H
        },
-- swapped ICCID: 98109909002143658739
        fillFileContent : '98109909002143658739'H
    }
}

```

```

    },
    ef-dir {
        fileDescriptor : {
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
            fileDescriptor '42210026'H,
            efFileSize '98'H
        },
-- USIM AID: A0000000871002FF33FF018900000100
        fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFF'H,
-- ISIM AID: A0000000871004FF33FF018900000100
        fillFileContent :
'61184F10A0000000871004FF33FF01890000010050044953494DFFFFFF
FFFFFFFFFFFFFFFFFFFF'H
    },
    ef-arr {
        fileDescriptor : {
-- Shareable Linear Fixed File
-- 16 records, record length: 37 bytes
-- ARR created with content recommended in Annex A
-- (Section 9.9) of [SA PP TS] plus two additional records
-- for use with EF_PL and EF_ICCID
            fileDescriptor '42210025'H,
            efFileSize '0250'H
        },
        fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
        fillFileOffset : 10,
        fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent : '80015BA40683010A950108'H,
        fillFileOffset : 26,
        fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
        fillFileOffset : 16,
        fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
        fillFileOffset : 4,
        fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
        fillFileOffset : 4,
        fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
        fillFileOffset : 10,
        fillFileContent : '800101900080015AA40683010A950108'H,
        fillFileOffset : 21,
        fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
        fillFileOffset : 16,
        fillFileContent : '800101A40683010195010880015A9700'H,
        fillFileOffset : 21,
        fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
        fillFileOffset : 15,

```

```

    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

#### 6.14.2.1.4. PE-MF-by-Template-3

It contains CSIM AID in EF DIR.

#### PE-MF-by-Template-3

```

mfVal ProfileElement ::= mf : {
  mf-header {
    mandated NULL,
    identification 214
  },
  templateID { 2 23 143 1 2 1 },
  mf {
    fileDescriptor : {
      pinStatusTemplatedO '01020A'H
    }
  },
  ef-pl {
    fileDescriptor : {
-- EF_PL modified to use Access Rule 15 within EF_ARR
      securityAttributesReferenced '0F'H
    },
    ef-iccid {
      fileDescriptor : {
-- use Access Rule 16 within EF_ARR
        securityAttributesReferenced '10'H
      },
-- swapped ICCID: 98109909002143658739
      fillFileContent : '98109909002143658739'H
    },
    ef-dir {
      fileDescriptor : {
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
        fileDescriptor '42210026'H,
        efFileSize '98'H
      },
-- CSIM AID: A0000003431002FF33FF018900000100
      fillFileContent :
'61184F10A0000003431002FF33FF01890000010050044353494DFFFFFFF
FFFFFFFFFFFFFFFFFFFF'H
    },
    ef-arr {
      fileDescriptor : {
-- Shareable Linear Fixed File
-- 16 records, record length: 37 bytes

```

-- ARR created with content recommended in Annex A (Section 9.9) of [SA PP TS] plus two additional records for use with EF\_PL and EF\_ICCID

```

        fileDescriptor '42210025'H,
        efFileSize '0250'H
    },
    fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A4068301
01950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A4068301
0A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A406830102950108800158
A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A950108800158
A40683010A950108'H
    }
}

```

### 6.14.2.1.5. PE-MF-by-Template-4

It contains the following EAP related Data Objects in EF DIR: Application EAP support types list; Application EAP Dedicated File list; Application EAP Label.

#### PE-MF-by-Template-4

```
mfVal ProfileElement ::= mf : {
  mf-header {
    mandated NULL,
    identification 215
  },
  templateID { 2 23 143 1 2 1 },
  mf {
    fileDescriptor : {
      pinStatusTemplateDO '01020A'H
    }
  },
  ef-pl {
    fileDescriptor : {
      -- EF_PL modified to use Access Rule 15 within EF_ARR
      securityAttributesReferenced '0F'H
    }
  },
  ef-iccid {
    fileDescriptor : {
      -- use Access Rule 16 within EF_ARR
      securityAttributesReferenced '10'H
    },
    -- swapped ICCID: 98109909002143658739
    fillFileContent : '98109909002143658739'H
  },
  ef-dir {
    fileDescriptor : {
      -- Shareable Linear Fixed File
      -- 4 records, record length: 46 bytes
      fileDescriptor '4221002E'H,
      efFileSize 'B8'H
    },
    -- USIM AID: A0000000871002FF33FF018900000100
    -- Application EAP Label: 4541502D414B41
    fillFileContent :
    '612C4F10A0000000871002FF33FF01890000010050045553494D7312A
    01080011781026D3582074541502D414B41'H
  },
  ef-arr {
    fileDescriptor : {
      -- Shareable Linear Fixed File
      -- 16 records, record length: 37 bytes
      -- ARR created with content recommended in Annex A
      (Section 9.9) of [SA PP TS] plus two additional records
      for use with EF_PL and EF_ICCID
      fileDescriptor '42210025'H,
      efFileSize '0250'H
    },
    fillFileContent :
    '8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
    '800101A40683010195010880015AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
```



```

    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

#### 6.14.2.1.6.

#### MF-by-Generic-File-Management-2

It contains the AID of ADF-Custom in EF DIR.

#### MF-by-Generic-File-Management-2

```

altMFVal ProfileElement ::= genericFileManagement : {
  gfm-header {
    mandated NULL,
    identification 216
  },
  fileManagementCMD {
    {
-- create MF
      createFCP : {
        fileDescriptor '7821'H,
        fileID '3F00'H,
        securityAttributesReferenced '0E'H,
        pinStatusTemplateDO '01020A'H

```

```

    },
-- create PL
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2F05'H,
        securityAttributesReferenced '0F'H,
        efFileSize '03'H,
        shortEFID '28'H
    },
-- create ICCID
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2FE2'H,
        securityAttributesReferenced '10'H,
        efFileSize '0A'H
    },
-- swapped ICCID: 98109909002143658739
    fillFileContent : '98109909002143658739'H,
-- create DIR
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
    createFCP : {
        fileDescriptor '42210026'H,
        fileID '2F00'H,
        securityAttributesReferenced '0A'H,
        efFileSize '98'H,
        shortEFID 'F0'H
    },
-- USIM AID: A0000000871002FF33FF018900000100
    fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFFFFFF'H,
-- AID of ADF_Custom: A000000600020002000001
    fillFileContent :
'61154F0BA0000006000200020000015006435553544F4DFFFFFFFFFFFF
FFFFFFFFFFFFFFFFFFFFFFFF'H,
-- create ARR
    createFCP : {
-- Shareable Linear Fixed File
-- 15 records, record length: 37 bytes
        fileDescriptor '42210025'H,
        fileID '2F06'H,
        securityAttributesReferenced '0A'H,
        efFileSize '0250'H
    },
    fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,

```

```

    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1 |
PIN Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H,
-- create UMPC
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2F08'H,
        securityAttributesReferenced '0A'H,
        efFileSize '05'H
    }
}
}
}

```

#### 6.14.2.1.7.

#### MF-by-Generic-File-Management-3

It has the same content as MF-by-Generic-File-Management-1, but it contains two FileManagement elements.

#### MF-by-Generic-File-Management-3

```

altMFVal ProfileElement ::= genericFileManagement : {
    gfm-header {
        mandated NULL,
        identification 217
    },
    fileManagementCMD {
        {
-- create MF
            createFCP : {
                fileDescriptor '7821'H,
                fileID '3F00'H,
                securityAttributesReferenced '0E'H,
                pinStatusTemplateDO '01020A'H
            },
-- create PL
            createFCP : {
                fileDescriptor '4121'H,
                fileID '2F05'H,

```

```

        securityAttributesReferenced '0F'H,
        efFileSize '03'H,
        shortEFID '28'H
    },
-- create ICCID
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2FE2'H,
        securityAttributesReferenced '10'H,
        efFileSize '0A'H
    },
-- swapped ICCID: 98109909002143658739
    fillFileContent : '98109909002143658739'H
},
{
-- create DIR
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
    createFCP : {
        fileDescriptor '42210026'H,
        fileID '2F00'H,
        securityAttributesReferenced '0A'H,
        efFileSize '98'H,
        shortEFID 'F0'H
    },
-- USIM AID: A0000000871002FF33FF018900000100
    fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494D'H,
-- create ARR
    createFCP : {
-- Shareable Linear Fixed File
-- 15 records, record length: 37 bytes
        fileDescriptor '42210025'H,
        fileID '2F06'H,
        securityAttributesReferenced '0A'H,
        efFileSize '0250'H
    },
    fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,

```

```

    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|
PIN Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H,
-- create UMPC
    createFCP : {
        fileDescriptor '4121'H,
        fileID '2F08'H,
        securityAttributesReferenced '0A'H,
        efFileSize '05'H
    }
}
}
}

```

#### 6.14.2.1.8.

#### PE-MF-by-Template-5

It contains two USIM AIDs in EF DIR.

#### PE-MF-by-Template-5

```

mfVal ProfileElement ::= mf : {
    mf-header {
        mandated NULL,
        identification 218
    },
    templateID { 2 23 143 1 2 1 },
    mf {
        fileDescriptor : {
            lcsi '05'H,
            pinStatusTemplateDO '01020A'H
        }
    },
    ef-pl {
        fileDescriptor : {
            lcsi '05'H,
            securityAttributesReferenced '0F'H
        }
    },
    ef-iccid {
        fileDescriptor : {
            lcsi '05'H,
            securityAttributesReferenced '10'H
        },
        fillFileContent : '98109909002143658739'H
    }
}

```

```

},
ef-dir {
  fileDescriptor : {
    fileDescriptor '42210026'H,
    lcsi '05'H,
    efFileSize '98'H
  },
  fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFF'H,
  fillFileContent :
'61184F10A0000000871002000000000000000020050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFF'H
},
ef-arr {
  fileDescriptor : {
    fileDescriptor '42210025'H,
    lcsi '05'H,
    efFileSize '0250'H
  },
  fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
  fillFileOffset : 10,
  fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
  fillFileOffset : 15,
  fillFileContent : '80015BA40683010A950108'H,
  fillFileOffset : 26,
  fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
  fillFileOffset : 16,
  fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
  fillFileOffset : 15,
  fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
  fillFileOffset : 15,
  fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
  fillFileOffset : 4,
  fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
  fillFileOffset : 4,
  fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
  fillFileOffset : 10,
  fillFileContent : '800101900080015AA40683010A950108'H,
  fillFileOffset : 21,
  fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
  fillFileOffset : 16,
  fillFileContent : '800101A40683010195010880015A9700'H,
  fillFileOffset : 21,
  fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
  fillFileOffset : 15,
  fillFileContent : '80015EA40683010A950108'H,
  fillFileOffset : 26,
  fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,

```

```

    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

#### 6.14.2.1.9.

#### PE-MF-by-Template-6

It contains ef-dir with USIM AID for non-IMSI SUPI type.

#### PE-MF-by-Template-6

```

mfVal ProfileElement ::= mf : {
  mf-header {
    mandated NULL,
    identification 219
  },
  templateID { 2 23 143 1 2 1 },
  mf {
    fileDescriptor : {
      pinStatusTemplateDO '01020A'H
    }
  },
  ef-pl {
    fileDescriptor : {
-- EF_PL modified to use Access Rule 15 within EF_ARR
      securityAttributesReferenced '0F'H
    }
  },
  ef-iccid {
    fileDescriptor : {
-- use Access Rule 16 within EF_ARR
      securityAttributesReferenced '10'H
    },
-- swapped ICCID: 98109909002143658739
    fillFileContent : '98109909002143658739'H
  },
  ef-dir {
    fileDescriptor : {
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
      fileDescriptor '42210026'H,
      efFileSize '98'H
    },
-- USIM AID: A000000087100BFF33FF018900000100
    fillFileContent :
'61184F10A000000087100BFF33FF0189000001005004553494DFFFFFF
FFFFFFFFFFFFFFFFFFFFFFFF'H
  },
  ef-arr {
    fileDescriptor : {
-- Shareable Linear Fixed File
-- 16 records, record length: 37 bytes
-- ARR created with content recommended in Annex A
-- (Section 9.9) of [SA PP TS] plus two additional records
-- for use with EF_PL and EF ICCID
      fileDescriptor '42210025'H,
      efFileSize '0250'H
    },
    fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,

```

```

    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

#### 6.14.2.1.10. PE-MF-by-Template-7

Same as PE-MF-by-Template-1, except the template version number in templateID.

#### PE-MF-by-Template-7

```

mfVal ProfileElement ::= mf : {
  mf-header {
    mandated NULL,
    identification 2110
  },
  templateID { 2 23 143 1 2 1 100},
  mf {
    fileDescriptor : {

```



```

        pinStatusTemplatedO '01020A'H
    },
    ef-pl {
        fileDescriptor : {
-- EF_PL modified to use Access Rule 15 within EF_ARR
            securityAttributesReferenced '0F'H
        },
    },
    ef-iccid {
        fileDescriptor : {
-- use Access Rule 16 within EF_ARR
            securityAttributesReferenced '10'H
        },
-- swapped ICCID: 98109909002143658739
        fillFileContent : '98109909002143658739'H
    },
    ef-dir {
        fileDescriptor : {
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes
            fileDescriptor '42210026'H,
            efFileSize '98'H
        },
-- USIM AID: A0000000871002FF33FF018900000100
        fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFFFFFF'H
    },
    ef-arr {
        fileDescriptor : {
-- Shareable Linear Fixed File
-- 16 records, record length: 37 bytes
-- ARR created with content recommended in Annex A
-- (Section 9.9) of [SA PP TS] plus two additional records
-- for use with EF_PL and EF ICCID
            fileDescriptor '42210025'H,
            efFileSize '0250'H
        },
        fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
        fillFileOffset : 10,
        fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent : '80015BA40683010A950108'H,
        fillFileOffset : 26,
        fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
        fillFileOffset : 16,
        fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
        fillFileOffset : 4,
        fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
        fillFileOffset : 4,

```

```

    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

#### 6.14.2.1.11. PE-MF-by-Template-8

Same as PE-MF-by-Template-7, except that this PE is not mandated.

#### PE-MF-by-Template-8

```

mfVal ProfileElement ::= mf : {
  mf-header {
    identification 2111
  },
  templateID { 2 23 143 1 2 1 100},
  mf {
    fileDescriptor : {
      pinStatusTemplatedO '01020A'H
    }
  },
  ef-pl {
    fileDescriptor : {
-- EF_PL modified to use Access Rule 15 within EF_ARR
      securityAttributesReferenced '0F'H
    }
  },
  ef-iccid {
    fileDescriptor : {
-- use Access Rule 16 within EF_ARR
      securityAttributesReferenced '10'H
    },
-- swapped ICCID: 98109909002143658739
    fillFileContent : '98109909002143658739'H
  },
  ef-dir {
    fileDescriptor : {
-- Shareable Linear Fixed File
-- 4 records, record length: 38 bytes

```

```

        fileDescriptor '42210026'H,
        efFileSize '98'H
    },
-- USIM AID: A0000000871002FF33FF018900000100
    fillFileContent :
'61184F10A0000000871002FF33FF01890000010050045553494DFFFFFF
FFFFFFFFFFFFFFFFFFFF'H
    },
    ef-arr {
        fileDescriptor : {
-- Shareable Linear Fixed File
-- 16 records, record length: 37 bytes
-- ARR created with content recommended in Annex A
-- (Section 9.9) of [SA PP TS] plus two additional records
-- for use with EF_PL and EF ICCID
            fileDescriptor '42210025'H,
            efFileSize '0250'H
        },
        fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
        fillFileOffset : 10,
        fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent : '80015BA40683010A950108'H,
        fillFileOffset : 26,
        fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
        fillFileOffset : 16,
        fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
        fillFileOffset : 4,
        fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
        fillFileOffset : 4,
        fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
        fillFileOffset : 10,
        fillFileContent : '800101900080015AA40683010A950108'H,
        fillFileOffset : 21,
        fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
        fillFileOffset : 16,
        fillFileContent : '800101A40683010195010880015A9700'H,
        fillFileOffset : 21,
        fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
        fillFileOffset : 15,
        fillFileContent : '80015EA40683010A950108'H,
        fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
        fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]

```

```

    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
  }
}

```

### 6.14.2.2. DF-CD

#### 6.14.2.2.1. *PE-CD-by-Template-1*

#### PE-CD-by-Template-1

```

cdValue ProfileElement ::= cd : {
  cd-header {
    mandated NULL,
    identification 221
  },
  templateID { 2 23 143 1 2 2 },
  df-cd {
    fileDescriptor : {
      pinStatusTemplatedO '010A'H
    }
  },
  ef-launchpad {
    fileDescriptor : {
      securityAttributesReferenced '2F0602'H,
      efFileSize '05'H
    },
    fillFileContent : '1122334455'H
  },
  ef-icon {
    fileDescriptor : {
      securityAttributesReferenced '2F0602'H,
      efFileSize '10'H
    },
    fillFileContent : '11223344556677889900112233445566'H,
-- 2nd ef-icon with different file ID
    fileDescriptor : {
      fileID '6F41'H,
      securityAttributesReferenced '2F0602'H,
      efFileSize '20'H
    },
    fillFileContent :
'112233445566778899001122334455661122334455667788990011223
3445566'H
  }
}

```

## 6.14.2.2.2.

## DF-CD-by-Generic-File-Management-1

## DF-CD-by-Generic-File-Management-1

```

df-CD ProfileElement ::=
genericFileManagement : {
  gfm-header {
    mandated NULL,
    identification 222
  },

  fileManagementCMD {
    {
-- DF CD
      createFCP : {
        fileDescriptor '7821'H,
        fileID '7F11'H,
        securityAttributesReferenced '0E'H,
        pinStatusTemplateDO '010A'H
      },
-- ef-launchpad
      createFCP : {
        fileDescriptor '4121'H,
        fileID '6F01'H,
        securityAttributesReferenced '2F0602'H,
        efFileSize '05'H,
        shortEFID ''H
      },
      fillFileContent : '1122334455'H,
-- ef-icon 1
      createFCP : {
        fileDescriptor '4121'H,
        fileID '6F40'H,
        securityAttributesReferenced '2F0602'H,
        efFileSize '10'H,
        shortEFID ''H
      },
      fillFileContent :
'11223344556677889900112233445566'H,
-- ef-icon 2
      createFCP : {
        fileDescriptor '4121'H,
        fileID '6F41'H,
        securityAttributesReferenced '2F0602'H,
        efFileSize '20'H,
        shortEFID ''H
      },
      fillFileContent :
'112233445566778899001122334455661122334455667788990011223
3445566'H
    }
  }
}

```

### 6.14.2.2.3. PE-CD-by-Template-2

Compared to PE-CD-by-Template-1 defined in 6.14.2.2.1, the 2<sup>nd</sup> instance of EF ICON is defined without an explicitly set file ID and the 3<sup>rd</sup> instance of EF ICON is defined with a file ID out of the upper range defined in Annex A of SA PP TS.

#### PE-CD-by-Template-2

```
cdValue ProfileElement ::= cd : {
  cd-header {
    mandated NULL,
    identification 223
  },
  templateID { 2 23 143 1 2 2 },
  df-cd {
    fileDescriptor : {
      pinStatusTemplateDO '010A'H
    }
  },

  ef-launchpad {
    fileDescriptor : {
      securityAttributesReferenced '2F0602'H,
      efFileSize '05'H
    },
    fillFileContent : '1122334455'H
  },

  ef-icon {
    fileDescriptor : {
      securityAttributesReferenced '2F0602'H,
      efFileSize '10'H
    },
    fillFileContent : '11223344556677889900112233445566'H,
-- 2nd ef-icon without explicitly defined file ID
    fileDescriptor : {
      securityAttributesReferenced '2F0602'H,
      efFileSize '20'H
    },
    fillFileContent :
'112233445566778899001122334455661122334455667788990011223
3445566'H,
-- 3rd ef-icon with file ID out of range
    fileDescriptor : {
      fileID '6F80'H,
      securityAttributesReferenced '2F0602'H,
      efFileSize '20'H
    },
    fillFileContent :
'112233445566778899001122334455661122334455667788990011223
3445566'H
  }
}
```

### 6.14.2.3. DF-TELECOM

#### 6.14.2.3.1. *PE-TELECOM-by-Template-1*

It contains no BER-TLV files.

#### PE-TELECOM-by-Template-1

```
teleValue ProfileElement ::= telecom : {
  telecom-header {
    mandated NULL,
    identification 231
  },
  templateID { 2 23 143 1 2 3 },
  df-telecom {
    fileDescriptor : {
      pinStatusTemplateDO '010A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-rma {
    fileDescriptor : {
      -- 2 record of 10 bytes
      fileDescriptor '4221000A'H,
      efFileSize '14'H
    },
    fillFileContent : '00010203040506070809'H,
    fillFileContent : '00010203040506070809'H
  },
  ef-sume {
    fileDescriptor : {
      efFileSize '10'H
    },
    fillFileContent : '850431323334'H
  },
  ef-ice-dn {
    fileDescriptor : {
      -- 2 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '20'H
    }
  },
  ef-ice-ff {
    fileDescriptor : {
      -- 1 records of 32 bytes
      fileDescriptor '42210020'H,
      efFileSize '20'H
    }
  },
  ef-psismsc {
    fileDescriptor : {
      -- 1 records of 16 bytes
      fileDescriptor '42210010'H,
```

```

    efFileSize '10'H
  },
  fillFileContent : '80000102030405060708091011121314'H
},

df-graphics {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},
ef-img {
  fileDescriptor : {
    -- 2 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '20'H
  }
},
ef-iidf {
  fileDescriptor : {
    efFileSize '18'H
  }
},

-- no ef-ice-graphics (BER-TLV)

ef-launch-scws {
  fileDescriptor : {
    efFileSize '10'H
  },
  fillFileContent : '000102030405060708090A0B0C0D0E0F'H
},
ef-icon {
  fileDescriptor : {
    efFileSize '15'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314'H
},

df-phonebook {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},
ef-pbr {
  fileDescriptor : {
    -- 3 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '30'H
  },
  fillFileContent : 'A808C0024F58C6024F90AA04C2024F38'H
},
ef-ext1 {
  fileDescriptor : {
    -- 2 records of 13 bytes
    -- Record size 0x0D defined in template
    -- fileDescriptor '4221000D'H,
    efFileSize '1A'H,
    shortEFID '08'H
  }
}

```



```
    }
},
ef-aas {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H
    }
},
ef-gas {
    fileDescriptor : {
        -- 2 records of 8 bytes
        fileDescriptor '42210008'H,
        efFileSize '10'H
    }
},
ef-psc {
    fileDescriptor : {
        shortEFID '10'H
    }
},
ef-cc {
    fileDescriptor : {
        shortEFID '18'H
    }
},
ef-puid {
    fileDescriptor : {
        shortEFID '20'H
    }
},
ef-iap {
    fileDescriptor : {
        -- 2 records of 5 bytes
        fileDescriptor '42210005'H,
        efFileSize '0A'H,
        shortEFID '28'H
    }
},
ef-adn {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '30'H
    }
},
ef-pbc { -- record size = 2 bytes
    fileDescriptor : {
        efFileSize '10'H,
        shortEFID '38'H
    }
},
ef-anr {
    fileDescriptor : {
        -- 1 record of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '14'H,
        shortEFID '40'H
    }
}
```

```

    }
},
ef-puri {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '48'H
    },
    fillFileContent : '80000102030405060708090A0B0C0D0E'H,
    fillFileContent : '80000102030405060708090A0B0C0D0E'H
},
ef-email {
    fileDescriptor : {
        -- 2 records of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '28'H,
        shortEFID '50'H
    }
},
ef-sne {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H,
        shortEFID '58'H
    }
},
ef-uid {
    fileDescriptor : {
        -- 8 records of 2 bytes
        efFileSize '10'H,
        shortEFID '60'H
    }
},
ef-grp {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '68'H
    }
},
ef-ccpl {
    fileDescriptor : {
        -- 4 records of 8 bytes
        fileDescriptor '42210008'H,
        efFileSize '20'H,
        shortEFID '70'H
    }
},

df-multimedia {
    fileDescriptor : {
        pinStatusTemplateDO '010A'H
    }
},
-- no ef-mml (BER-TLV)
-- no ef-mmdf (BER-TLV)

```

```

df-mmss {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},

ef-mlpl {
  fileDescriptor : {
    efFileSize '18'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314151617'H
},
ef-mspl {
  fileDescriptor : {
    efFileSize '19'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F101112131415161718'H
},
ef-mmssmode {
  fillFileContent : '01'H
}
}

```

#### 6.14.2.3.2.

#### PE-TELECOM-by-Template-2

It contains BER-TLV files.

#### PE-TELECOM-by-Template-2

```

teleValue ProfileElement ::= telecom : {
  telecom-header {
    mandated NULL,
    identification 232
  },
  templateID { 2 23 143 1 2 3 },
  df-telecom {
    fileDescriptor : {
      pinStatusTemplateDO '010A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-rma {
    fileDescriptor : {
      -- 2 record of 10 bytes
      fileDescriptor '4221000A'H,
      efFileSize '14'H
    },
    fillFileContent : '00010203040506070809'H,
    fillFileContent : '00010203040506070809'H
  },
  ef-sume {
    fileDescriptor : {
      efFileSize '10'H
    }
  }
}

```

```

    },
    fillFileContent : '850431323334'H
  },
  ef-ice-dn {
    fileDescriptor : {
      -- 2 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '20'H
    }
  },
  ef-ice-ff {
    fileDescriptor : {
      -- 1 records of 32 bytes
      fileDescriptor '42210020'H,
      efFileSize '20'H
    }
  },
  ef-psismsc {
    fileDescriptor : {
      -- 1 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '10'H
    },
    fillFileContent : '80000102030405060708091011121314'H
  },

  df-graphics {
    fileDescriptor : {
      pinStatusTemplateDO '010A'H
    }
  },
  ef-img {
    fileDescriptor : {
      -- 2 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '20'H
    }
  },
  ef-iidf {
    fileDescriptor : {
      efFileSize '18'H
    }
  },

  ef-ice-graphics { -- BER-TLV
    fileDescriptor : {
      efFileSize '18'H
    }
  },
  ef-launch-scws {
    fileDescriptor : {
      efFileSize '10'H
    },
    fillFileContent : '000102030405060708090A0B0C0D0E0F'H
  },
  ef-icon {
    fileDescriptor : {
      efFileSize '15'H
    },

```

```

    fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314'H
},

df-phonebook {
    fileDescriptor : {
        pinStatusTemplateDO '010A'H
    }
},

ef-pbr {
    fileDescriptor : {
        -- 3 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '30'H
    },
    fillFileContent : 'A808C0024F58C6024F90AA04C2024F38'H
},

ef-ext1 {
    fileDescriptor : {
        -- 2 records of 13 bytes
        -- Record size 0x0D defined in template
        -- fileDescriptor '4221000D'H,
        efFileSize '1A'H,
        shortEFID '08'H
    }
},

ef-aas {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H
    }
},

ef-gas {
    fileDescriptor : {
        -- 2 records of 8 bytes
        fileDescriptor '42210008'H,
        efFileSize '10'H
    }
},

ef-psc {
    fileDescriptor : {
        shortEFID '10'H
    }
},

ef-cc {
    fileDescriptor : {
        shortEFID '18'H
    }
},

ef-puid {
    fileDescriptor : {
        shortEFID '20'H
    }
},

ef-iap {
    fileDescriptor : {
        -- 2 records of 5 bytes
        fileDescriptor '42210005'H,

```

```

        efFileSize '0A'H,
        shortEFID '28'H
    }
},
ef-adn {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '30'H
    }
},
ef-pbc { -- record size = 2 bytes
    fileDescriptor : {
        efFileSize '10'H,
        shortEFID '38'H
    }
},
ef-anr {
    fileDescriptor : {
        -- 1 record of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '14'H,
        shortEFID '40'H
    }
},
ef-puri {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '48'H
    },
    fillFileContent : '80000102030405060708090A0B0C0D0E'H,
    fillFileContent : '80000102030405060708090A0B0C0D0E'H
},
ef-email {
    fileDescriptor : {
        -- 2 records of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '28'H,
        shortEFID '50'H
    }
},
ef-sne {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H,
        shortEFID '58'H
    }
},
ef-uid {
    fileDescriptor : {
        -- 8 records of 2 bytes
        efFileSize '10'H,
        shortEFID '60'H
    }
},

```

```

ef-grp {
  fileDescriptor : {
    -- 2 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '20'H,
    shortEFID '68'H
  }
},
ef-ccpl {
  fileDescriptor : {
    -- 4 records of 8 bytes
    fileDescriptor '42210008'H,
    efFileSize '20'H,
    shortEFID '70'H
  }
},

df-multimedia {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},
ef-mml { -- BER-TLV
  fileDescriptor : {
    efFileSize '20'H
  }
},
ef-mmdf { -- BER-TLV
  fileDescriptor : {
    efFileSize '28'H
  }
},

df-mmss {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},

ef-mlpl {
  fileDescriptor : {
    efFileSize '18'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314151617'H
},
ef-mspl {
  fileDescriptor : {
    efFileSize '19'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F101112131415161718'H
},
ef-mmssmode {
  fillFileContent : '01'H
}
}

```

## 6.14.2.3.3.

## PE-TELECOM-by-Template-3

It contains BER-TLV files and the PE is not mandated.

### PE-TELECOM-by-Template-3

```

teleValue ProfileElement ::= telecom : {
  telecom-header {
    identification 233
  },
  templateID { 2 23 143 1 2 3 },
  df-telecom {
    fileDescriptor : {
      pinStatusTemplateDO '010A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-rma {
    fileDescriptor : {
      -- 2 record of 10 bytes
      fileDescriptor '4221000A'H,
      efFileSize '14'H
    },
    fillFileContent : '00010203040506070809'H,
    fillFileContent : '00010203040506070809'H
  },
  ef-sume {
    fileDescriptor : {
      efFileSize '10'H
    },
    fillFileContent : '850431323334'H
  },
  ef-ice-dn {
    fileDescriptor : {
      -- 2 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '20'H
    }
  },
  ef-ice-ff {
    fileDescriptor : {
      -- 1 records of 32 bytes
      fileDescriptor '42210020'H,
      efFileSize '20'H
    }
  },
  ef-psismsc {
    fileDescriptor : {
      -- 1 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '10'H
    },
    fillFileContent : '80000102030405060708091011121314'H
  },

```



```

df-graphics {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},
ef-img {
  fileDescriptor : {
    -- 2 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '20'H
  }
},
ef-iidf {
  fileDescriptor : {
    efFileSize '18'H
  }
},

ef-ice-graphics { -- BER-TLV
  fileDescriptor : {
    efFileSize '18'H
  }
},
ef-launch-scws {
  fileDescriptor : {
    efFileSize '10'H
  },
  fillFileContent : '000102030405060708090A0B0C0D0E0F'H
},
ef-icon {
  fileDescriptor : {
    efFileSize '15'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314'H
},

df-phonebook {
  fileDescriptor : {
    pinStatusTemplateDO '010A'H
  }
},
ef-pbr {
  fileDescriptor : {
    -- 3 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '30'H
  },
  fillFileContent : 'A808C0024F58C6024F90AA04C2024F38'H
},
ef-ext1 {
  fileDescriptor : {
    -- 2 records of 13 bytes
    -- Record size 0x0D defined in template
    -- fileDescriptor '4221000D'H,
    efFileSize '1A'H,
    shortEFID '08'H
  }
}

```

```
    }
},
ef-aas {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H
    }
},
ef-gas {
    fileDescriptor : {
        -- 2 records of 8 bytes
        fileDescriptor '42210008'H,
        efFileSize '10'H
    }
},
ef-psc {
    fileDescriptor : {
        shortEFID '10'H
    }
},
ef-cc {
    fileDescriptor : {
        shortEFID '18'H
    }
},
ef-puid {
    fileDescriptor : {
        shortEFID '20'H
    }
},
ef-iap {
    fileDescriptor : {
        -- 2 records of 5 bytes
        fileDescriptor '42210005'H,
        efFileSize '0A'H,
        shortEFID '28'H
    }
},
ef-adn {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '30'H
    }
},
ef-pbc { -- record size = 2 bytes
    fileDescriptor : {
        efFileSize '10'H,
        shortEFID '38'H
    }
},
ef-anr {
    fileDescriptor : {
        -- 1 record of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '14'H,
        shortEFID '40'H
    }
}
```

```

    }
},
ef-puri {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '48'H
    },
    fillFileContent : '80000102030405060708090A0B0C0D0E'H,
    fillFileContent : '80000102030405060708090A0B0C0D0E'H
},
ef-email {
    fileDescriptor : {
        -- 2 records of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '28'H,
        shortEFID '50'H
    }
},
ef-sne {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H,
        shortEFID '58'H
    }
},
ef-uid {
    fileDescriptor : {
        -- 8 records of 2 bytes
        efFileSize '10'H,
        shortEFID '60'H
    }
},
ef-grp {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '68'H
    }
},
ef-ccpl {
    fileDescriptor : {
        -- 4 records of 8 bytes
        fileDescriptor '42210008'H,
        efFileSize '20'H,
        shortEFID '70'H
    }
},

df-multimedia {
    fileDescriptor : {
        pinStatusTemplateDO '010A'H
    }
},
ef-mml { -- BER-TLV
    fileDescriptor : {

```

```

        efFileSize '20'H
    }
},
ef-mmdf {  -- BER-TLV
    fileDescriptor : {
        efFileSize '28'H
    }
},

df-mmss {
    fileDescriptor : {
        pinStatusTemplateDO '010A'H
    }
},

ef-mlpl {
    fileDescriptor : {
        efFileSize '18'H
    },
    fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314151617'H
},
ef-mspl {
    fileDescriptor : {
        efFileSize '19'H
    },
    fillFileContent :
'000102030405060708090A0B0C0D0E0F101112131415161718'H
},
ef-mmssmode {
    fillFileContent : '01'H
}
}

```

#### 6.14.2.3.4. PE-TELECOM-by-Template-4

It contains the same EF-s as PE-TELECOM-by-Template-1, but the pinStatusTemplateDO/securityAttributesReferenced value is updated for some files with reference to LocalPIN1/rule including LocalPIN1.

#### PE-TELECOM-by-Template-4

```

teleValue ProfileElement ::= telecom : {
    telecom-header {
        mandated NULL,
        identification 234
    },
    templateID { 2 23 143 1 2 3 },
    df-telecom {
        fileDescriptor : {
            pinStatusTemplateDO '01810A'H
        }
    },
    ef-arr {
        fileDescriptor : {
            linkPath '2F06'H
        }
    }
}

```

```

},
ef-rma {
    fileDescriptor : {
        -- 2 record of 10 bytes
        fileDescriptor '4221000A'H,
        efFileSize '14'H
    },
    fillFileContent : '00010203040506070809'H,
    fillFileContent : '00010203040506070809'H
},
ef-sume {
    fileDescriptor : {
        securityAttributesReferenced '08'H,
        efFileSize '10'H
    },
    fillFileContent : '850431323334'H
},
ef-ice-dn {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H
    }
},
ef-ice-ff {
    fileDescriptor : {
        -- 1 records of 32 bytes
        fileDescriptor '42210020'H,
        efFileSize '20'H
    }
},
ef-psismsc {
    fileDescriptor : {
        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H
    },
    fillFileContent : '80000102030405060708091011121314'H
},

df-graphics {
    fileDescriptor : {
        pinStatusTemplateDO '01810A'H
    }
},
ef-img {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H
    }
},
ef-iidf {
    fileDescriptor : {
        efFileSize '18'H
    }
},

-- no ef-ice-graphics (BER-TLV)

```

```

ef-launch-scws {
  fileDescriptor : {
    efFileSize '10'H
  },
  fillFileContent : '000102030405060708090A0B0C0D0E0F'H
},
ef-icon {
  fileDescriptor : {
    securityAttributesReferenced '08'H,
    efFileSize '15'H
  },
  fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314'H
},

df-phonebook {
  fileDescriptor : {
    pinStatusTemplateDO '01810A'H
  }
},
ef-pbr {
  fileDescriptor : {
    -- 3 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '30'H
  },
  fillFileContent : 'A808C0024F58C6024F90AA04C2024F38'H
},
ef-ext1 {
  fileDescriptor : {
    -- 2 records of 13 bytes
    -- Record size 0x0D defined in template
    -- fileDescriptor '4221000D'H,
    efFileSize '1A'H,
    shortEFID '08'H
  }
},
ef-aas {
  fileDescriptor : {
    -- 1 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '10'H
  }
},
ef-gas {
  fileDescriptor : {
    -- 2 records of 8 bytes
    fileDescriptor '42210008'H,
    efFileSize '10'H
  }
},
ef-psc {
  fileDescriptor : {
    shortEFID '10'H
  }
},
ef-cc {
  fileDescriptor : {

```

```

        shortEFID '18'H
    }
},
ef-puid {
    fileDescriptor : {
        securityAttributesReferenced '08'H,
        shortEFID '20'H
    }
},
ef-iap {
    fileDescriptor : {
        -- 2 records of 5 bytes
        fileDescriptor '42210005'H,
        efFileSize '0A'H,
        shortEFID '28'H
    }
},
ef-adn {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '30'H
    }
},
ef-pbc { -- record size = 2 bytes
    fileDescriptor : {
        efFileSize '10'H,
        shortEFID '38'H
    }
},
ef-anr {
    fileDescriptor : {
        -- 1 record of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '14'H,
        shortEFID '40'H
    }
},
ef-puri {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '48'H
    },
    fillFileContent : '80000102030405060708090A0B0C0D0E'H,
    fillFileContent : '80000102030405060708090A0B0C0D0E'H
},
ef-email {
    fileDescriptor : {
        -- 2 records of 20 bytes
        fileDescriptor '42210014'H,
        efFileSize '28'H,
        shortEFID '50'H
    }
},
ef-sne {
    fileDescriptor : {

```

```

        -- 1 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '10'H,
        shortEFID '58'H
    }
},
ef-uid {
    fileDescriptor : {
        -- 8 records of 2 bytes
        efFileSize '10'H,
        shortEFID '60'H
    }
},
ef-grp {
    fileDescriptor : {
        -- 2 records of 16 bytes
        fileDescriptor '42210010'H,
        efFileSize '20'H,
        shortEFID '68'H
    }
},
ef-ccpl {
    fileDescriptor : {
        -- 4 records of 8 bytes
        fileDescriptor '42210008'H,
        efFileSize '20'H,
        shortEFID '70'H
    }
},

df-multimedia {
    fileDescriptor : {
        pinStatusTemplateDO '010A'H
    }
},
-- no ef-mml (BER-TLV)
-- no ef-mmdf (BER-TLV)
df-mmss {
    fileDescriptor : {
        pinStatusTemplateDO '01810A'H
    }
},

ef-mlpl {
    fileDescriptor : {
        efFileSize '18'H
    },
    fillFileContent :
'000102030405060708090A0B0C0D0E0F1011121314151617'H
},
ef-mspl {
    fileDescriptor : {
        securityAttributesReferenced '08'H,
        efFileSize '19'H
    },
    fillFileContent :
'000102030405060708090A0B0C0D0E0F101112131415161718'H
},
ef-mmssmode {

```



```

    fillFileContent : '01'H
  }
}

```

#### 6.14.2.3.5. PE-TELECOM-by-Template-1-v2

The content is identical to 6.14.2.3.1 PE-TELECOM-by-Template-1, except:

- The value of `identification` field which equals 235
- The value of `templateID` field, which equals {2 23 143 1 2 3 2}

#### 6.14.2.3.6. PE-TELECOM-by-Template-2-v2

The content is identical to 6.14.2.3.2 PE-TELECOM-by-Template-2, except:

- The value of `identification` field which equals 236
- The value of `templateID` field, which equals {2 23 143 1 2 3 2}

#### 6.14.2.3.7. PE-TELECOM-by-Template-3-v2

The content is identical to 6.14.2.3.3 PE-TELECOM-by-Template-3, except:

- The value of `identification` field which equals 237
- The value of `templateID` field, which equals {2 23 143 1 2 3 2}

#### 6.14.2.3.8. PE-TELECOM-by-Template-4-v2

The content is identical to 6.14.2.3.4 PE-TELECOM-by-Template-4 except:

- The value of `identification` field which equals 238
- The value of `templateID` field, which equals {2 23 143 1 2 3 2}

#### 6.14.2.3.9. PE-TELECOM-by-Template-5-v2

It contains new TELECOM files from template v2.

#### PE-TELECOM-by-Template-5-v2

```

teleValue ProfileElement ::= telecom : {
  telecom-header {
    mandated NULL,
    identification 239
  },
  templateID { 2 23 143 1 2 3 2 },
  df-telecom {
    fileDescriptor : {
      pinStatusTemplateDO '010A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-rma {
    fileDescriptor : {
      -- 2 record of 10 bytes
      fileDescriptor '4221000A'H,
      efFileSize '14'H
    },
    fillFileContent : '00010203040506070809'H,

```

```
    fillFileContent : '00010203040506070809'H
  },
  ef-sume {
    fileDescriptor : {
      efFileSize '10'H
    },
    fillFileContent : '850431323334'H
  },
  ef-psismsc {
    fileDescriptor : {
      -- 1 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '10'H
    },
    fillFileContent : '80000102030405060708091011121314'H
  },
  df-mcs {
    fileDescriptor : {
      pinStatusTemplatedO '010A'H
    }
  },
  ef-mst {
    fileDescriptor : {
      efFileSize '02'H
    },
    fillFileContent : '0001'H
  },
  ef-mcs-config { -- BER-TLV
    fileDescriptor : {
      efFileSize '0A'H
    },
    fillFileContent : '8003010203'H
  },
  df-v2x {
    fileDescriptor : {
      pinStatusTemplatedO '010A'H
    }
  },
  ef-vst {
    fileDescriptor : {
      efFileSize '02'H
    },
    fillFileContent : '0007'H
  },
  ef-v2x-config { -- BER-TLV
    fileDescriptor : {
      efFileSize '0A'H
    },
    fillFileContent : '8003010203'H
  },
  ef-v2xp-pc5 {
    fileDescriptor : {
      efFileSize '10'H
    },
    fillFileContent : 'A00A 11223344 00 8003010203'H
  },
  ef-v2xp-Uu {
    fileDescriptor : {
      efFileSize '10'H
```

```

    },
    fillFileContent : 'A00A 11223344 00 8003010203'H
  }
}

```

#### 6.14.2.4. CUSTOM

##### 6.14.2.4.1. *DF-CUSTOM-by-Generic-File-Management-1*

#### DF-CUSTOM-by-Generic-File-Management-1

```

customDF ProfileElement ::= genericFileManagement : {

  gfm-header {
    mandated NULL,
    identification 241
  },

  fileManagementCMD {
    {
      -- no filePath, shall go under MF
      -- Custom DF
      createFCP : {
        fileDescriptor '7821'H, -- sharable (A)DF
        fileID '7FA0'H,
        securityAttributesReferenced '0E'H,
        pinStatusTemplateDO '010A'H
      },

      -- EF_ARR Link
      createFCP : {
        fileDescriptor '42210025'H,
        fileID '6F06'H,
        securityAttributesReferenced '0A'H,
        shortEFID 'B8'H,
        linkPath '2F06'H
      },

      -- ef_1
      createFCP : {
        fileDescriptor '4121'H, -- sharable binary EF
        fileID '6F01'H,
        securityAttributesReferenced '01'H, -- RD ALW, UP
        PIN1
        efFileSize '06'H,
        shortEFID '08'H
      },

      -- ef_2
      createFCP : {
        fileDescriptor '42210010'H, -- sharable lin.fixed EF,
        record size 0x10
        fileID '6F02'H,
        securityAttributesReferenced '02'H, -- RD PIN1, UP
        ADM1
        efFileSize '80'H,
        shortEFID ''H
      },

      -- ef_3

```

```

    createFCP : {
      fileDescriptor '42210020'H, -- record size 0x20
      fileID '6F03'H,
      securityAttributesReferenced '05'H, -- RD PIN1, UP
PIN1
      efFileSize '60'H,
      shortEFID ''H
    }
  }
}
}

```

#### 6.14.2.4.2. DF-CUSTOM-by-Generic-File-Management-2

It is a non mandatory custom DF that creates a dfLink file.

##### DF-CUSTOM-by-Generic-File-Management-2

```

linkDF ProfileElement ::= genericFileManagement : {
  gfm-header {
    identification 242
  },

  fileManagementCMD {
    {
      -- no filePath, shall go under MF
      -- Link DF
      createFCP : {
        fileDescriptor '7821'H, -- sharable DF
        fileID '7FA1'H,
        securityAttributesReferenced '0D'H,
        linkPath '7F105F3A'H -- DF Phonebook
      }
    }
  }
}

```

#### 6.14.2.4.3. DF-CUSTOM-by-Generic-File-Management-3

It is a mandatory custom DF that creates a dfLink file.

##### DF-CUSTOM-by-Generic-File-Management-3

```

linkDF ProfileElement ::= genericFileManagement : {
  gfm-header {
    mandated NULL,
    identification 243
  },

  fileManagementCMD {
    {
      -- no filePath, shall go under MF
      -- Link DF
      createFCP : {
        fileDescriptor '7821'H, -- sharable DF

```

```

        fileID '7FA1'H,
        securityAttributesReferenced '0D'H,
        linkPath '7F11'H -- DF CD
    }
}
}
}

```

#### 6.14.2.4.4. ADF-CUSTOM-by-Generic-File-Management-1

##### ADF-CUSTOM-by-Generic-File-Management-1

```

customDF ProfileElement ::= genericFileManagement : {

    gfm-header {
        mandated NULL,
        identification 244
    },
    fileManagementCMD {
        {
            -- no filePath, shall go under MF
            -- Custom ADF
            createFCP : {
                fileDescriptor '7821'H, -- sharable ADF
                fileID '7FA1'H,
                dfName 'A000000600020002000001'H,
                securityAttributesReferenced '0E'H,
                pinStatusTemplateDO '01810A'H
            },
            -- create ARR
            createFCP : {
                -- Shareable Linear Fixed File
                -- 15 records, record length: 37 bytes
                fileDescriptor '42210025'H,
                fileID '6F06'H,
                securityAttributesReferenced '0A'H,
                efFileSize '0250'H
            },
            fillFileContent :
            '8001019000800102A406830101950108800158A40683010A950108'H,
            fillFileOffset : 10,
            fillFileContent :
            '800101A40683010195010880015AA40683010A950108'H,
            fillFileOffset : 15,
            fillFileContent : '80015BA40683010A950108'H,
            fillFileOffset : 26,
            fillFileContent : '800101900080015A9700'H,
            fillFileOffset : 27,
            fillFileContent :
            '800103A406830101950108800158A40683010A950108'H,
            fillFileOffset : 15,
            fillFileContent :
            '800111A40683010195010880014AA40683010A950108'H,
            fillFileOffset : 15,
            fillFileContent :
            '800103A406830101950108800158A40683010A950108840132A406830
            101950108'H,
            fillFileOffset : 4,
            -- Rule 8: [Read: Always][Update: second PIN Appl
            1][Incr.: Never][Deactivate, Activate, Delete: ADM1]

```

```

    fillFileContent :
'8001019000800102A406830181950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|
PIN Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H,
-- ef_1
    createFCP : {
        fileDescriptor '4121'H,    -- sharable binary EF
        fileID '6F01'H,
        securityAttributesReferenced '08'H, -- RD ALW, UP
Local PIN1
        efFileSize '0A'H,
        shortEFID ''H
    },
    fillFileContent : '00112233445566778899'H,
-- ef_2
    createFCP : {
        fileDescriptor '4121'H,    -- sharable binary EF
        fileID '6F02'H,
        securityAttributesReferenced '05'H, -- RD PIN1, UP
PIN1
        efFileSize '0A'H,
        shortEFID ''H
    },
    fillFileContent : '66778899AABBCCDDEEFF'H
}
}
}

```

#### 6.14.2.4.5. DF-CUSTOM-by-Generic-File-Management-4

It contains an EF with unknownTag.

#### DF-CUSTOM-by-Generic-File-Management-4

```
customDF ProfileElement ::= genericFileManagement : {

    gfm-header {
        mandated NULL,
        identification 245
    },

    fileManagementCMD {
        {
            -- no filePath, shall go under MF
            -- Custom DF
            createFCP : {
                fileDescriptor '7821'H, -- sharable (A)DF
                fileID '7FA2'H,
                securityAttributesReferenced '0E'H,
                pinStatusTemplateDO '010A'H
            },

            -- EF_ARR Link
            createFCP : {
                fileDescriptor '42210025'H,
                fileID '6F06'H,
                securityAttributesReferenced '0A'H,
                shortEFID 'B8'H,
                linkPath '2F06'H
            },

            -- ef_1
            createFCP : {
                fileDescriptor '4121'H, -- sharable binary EF
                fileID '6F01'H,
                securityAttributesReferenced '01'H, -- RD ALW, UP
PIN1
                efFileSize '06'H,
                shortEFID '08'H
            },

            -- ef_2
            createFCP : {
                fileDescriptor '42210010'H, -- sharable lin.fixed EF,
record size 0x10
                fileID '6F02'H,
                securityAttributesReferenced '02'H, -- RD PIN1, UP
ADM1
                efFileSize '80'H,
                shortEFID ''H,
                unknownTag 'ABC123'H
            }
        }
    }
}
```

#### 6.14.2.4.6. DF-CUSTOM-by-Generic-File-Management-5

##### DF-CUSTOM-by-Generic-File-Management-5

```

multiLevelDFs ProfileElement ::= genericFileManagement : {
  gfm-header {
    mandated NULL,
    identification 246
  },

  fileManagementCMD {
    {
      -- no filePath, shall go under MF
      -- Custom DF 7FA0
      createFCP : {
        fileDescriptor '7821'H, -- shareable DF
        fileID '7FA0'H,
        securityAttributesReferenced '0E'H,
        pinStatusTemplatedO '010A'H
      },
      -- Custom DF 7FA0/5FA0
      createFCP : {
        fileDescriptor '7821'H, -- shareable DF
        fileID '5FA0'H,
        securityAttributesReferenced '2F060E'H,
        pinStatusTemplatedO '010A'H
      },
      -- Custom DF 7FA0/5FA0/3FA0
      createFCP : {
        fileDescriptor '7821'H, -- shareable DF
        fileID '3FA0'H,
        securityAttributesReferenced '2F060E'H,
        pinStatusTemplatedO '010A'H
      },
      -- EF_2FA1 inside DF 7FA0/5FA0/3FA0
      createFCP : {
        fileDescriptor '4121'H, -- shareable binary EF
        fileID '2FA1'H,
        securityAttributesReferenced '2F0601'H,
        efFileSize '06'H,
        shortEFID ''H
      }
    }
    fillFileContent : '010203040506'H,
    -- DF_1FA0 inside DF 7FA0/5FA0/3FA0
    createFCP : {
      fileDescriptor '7821'H, -- shareable DF
      fileID '1FA0'H,
      securityAttributesReferenced '2F060E'H,
      pinStatusTemplatedO '010A'H
    }
  }
}

```



#### 6.14.2.4.7. DF-CUSTOM-by-Generic-File-Management-6

It contains a DF with a linkPath of 8 bytes.

##### DF-CUSTOM-by-Generic-File-Management-6

```
dfWithEfLink ProfileElement ::= genericFileManagement : {
  gfm-header {
    mandated NULL,
    identification 247
  },

  fileManagementCMD {
    {
      -- no filePath, shall go under MF
      createFCP : {
        fileDescriptor '7821'H, -- shareable DF
        fileID '7FA1'H,
        securityAttributesReferenced '0D'H,
        pinStatusTemplatedO '010A'H
      },
      createFCP : {
        fileDescriptor '4121'H, -- shareable binary EF
        fileID '6FA1'H,
        securityAttributesReferenced '2F0601'H,
        shortEFID 'H,
        linkPath '7FA05FA03FA02FA1'H -- link to EF 2FA1,
        defined in DF-CUSTOM-by-Generic-File-Management-5
      }
    }
  }
}
```

#### 6.14.2.4.8. EF-CUSTOM-by-Generic-File-Management-1

It contains an EF with a filePath of 8 bytes.

##### EF-CUSTOM-by-Generic-File-Management-1

```
efWithFilepath ProfileElement ::= genericFileManagement :
{
  gfm-header {
    mandated NULL,
    identification 248
  },

  fileManagementCMD {
    {
      -- Context: DF 1FA0, defined in DF-CUSTOM-by-Generic-
      File-Management-5
      filePath : '7FA05FA03FA01FA0'H,
      createFCP : {
        fileDescriptor '4121'H, -- shareable binary EF
        fileID '0FA1'H,
        securityAttributesReferenced '2F0601'H,
```

```

    efFileSize '05'H,
    shortEFID ''H
  },
  fillFileContent : '1112131415'H
}
}
}

```

#### 6.14.2.4.9. EF-CUSTOM-by-Generic-File-Management-2

It contains an EF with a filePath of 8 bytes and another EF with a filePath of 0 byte..

#### EF-CUSTOM-by-Generic-File-Management-2

```

efWithFilepath ProfileElement ::= genericFileManagement :
{
  gfm-header {
    mandated NULL,
    identification 249
  },

  fileManagementCMD {
    {
      -- Context: DF 1FA0, defined in DF-CUSTOM-by-Generic-
      File-Management-5
      filePath : '7FA05FA03FA01FA0'H,
      createFCP : {
        fileDescriptor '4121'H,  -- shareable binary EF
        fileID '0FA1'H,
        securityAttributesReferenced '2F0601'H,
        efFileSize '05'H,
        shortEFID ''H
      },
      fillFileContent : '1112131415'H,

      -- Context: MF
      filePath : ''H,
      createFCP : {
        fileDescriptor '4121'H,  -- shareable binary EF
        fileID '6FA2'H,
        securityAttributesReferenced '2F0601'H,
        efFileSize '04'H,
        shortEFID ''H
      },
      fillFileContent : '21222324'H
    }
  }
}

```

#### 6.14.2.4.10. DF-CUSTOM-by-Generic-File-Management-7

It has the same content as DF-CUSTOM-by-Generic-File-Management-1 except the value of securityAttributesReferenced tags which have been adapted for IoT Minimal profile default values.

#### DF-CUSTOM-by-Generic-File-Management-7

```
customDF ProfileElement ::= genericFileManagement : {

  gfm-header {
    mandated NULL,
    identification 2410
  },

  fileManagementCMD {
    {
      -- no filePath, shall go under MF
      -- Custom DF
      createFCP : {
        fileDescriptor '7821'H, -- sharable (A)DF
        fileID '7FA0'H,
        securityAttributesReferenced '07'H,
        pinStatusTemplateDO '010A'H
      },

-- EF_ARR Link
      createFCP : {
        fileDescriptor '42210025'H,
        fileID '6F06'H,
        securityAttributesReferenced '05'H,
        shortEFID 'B8'H,
        linkPath '2F06'H
      },

-- ef_1
      createFCP : {
        fileDescriptor '4121'H, -- sharable binary EF
        fileID '6F01'H,
        securityAttributesReferenced '01'H, -- RD ALW, UP
PIN1
        efFileSize '06'H,
        shortEFID '08'H
      },

-- ef_2
      createFCP : {
        fileDescriptor '42210010'H, -- sharable lin.fixed EF,
record size 0x10
        fileID '6F02'H,
        securityAttributesReferenced '02'H, -- RD PIN1, UP
ADM1
        efFileSize '80'H,
        shortEFID ''H
      },

-- ef_3
      createFCP : {
        fileDescriptor '42210020'H, -- record size 0x20
        fileID '6F03'H,
```

```

        securityAttributesReferenced '04'H, -- RD PIN1, UP
PIN1
        efFileSize '60'H,
        shortEFID ''H
    }
}
}
}

```

#### 6.14.2.5. DF-EAP

##### 6.14.2.5.1. *PE-EAP-by-Template-1*

#### PE-EAP-by-Template-1

```

eapValue ProfileElement ::= eap : {
    eap-header {
        mandated NULL,
        identification 251
    },

    templateID { 2 23 143 1 2 12 },

    df-eap {
        fileDescriptor : {
            fileID '6D35'H,
            pinStatusTemplateDO '010A'H
        }
    },

    ef-eapkeys {
        fileDescriptor : {
            securityAttributesReferenced '6F0602'H,
            efFileSize '84'H
        },
        fillFileContent : '8040 39d45aea f4e30601 983e972b
6cfd46d1 c3637733 65690d09 cd44976b 525f47d3 a60a985e
955c53b0 90b2e4b7 3719196a 40254296 8fd14a88 8f46b9a7
886e4488 81 40 5949eab0 fff69d52 315c6c63 4fd14a7f
0d52023d 56f79698 fa6596ab eed4f93f bb48eb53 4d985414
ceed0d9a 8ed33c38 7c9dfdab 92ffbdf2 40fcec6f 5a2c93b9'H
    },
    ef-eapstatus {},

    ef-puid {
        fileDescriptor : {
            securityAttributesReferenced '6F0602'H,
            efFileSize '64'H
        },
        -- permanent username: 1123456789098765
        fillFileContent : ' 31313233343536373839303938373635'H
    },

    ef-ps {
        fileDescriptor : {
            securityAttributesReferenced '6F0605'H,

```

```
        efFileSize '64'H
    },
    -- pseudonym username: 3s7ah6n9q
    fillFileContent : '3373376168366E3971'H
},

ef-curid {
    fileDescriptor : {
        securityAttributesReferenced '6F0605'H,
        efFileSize '64'H
    }
},

ef-reid {
    fileDescriptor : {
        securityAttributesReferenced '6F0605'H,
        efFileSize '64'H
    },
    -- fast re-authentication username: 53953754
    fillFileContent :
'80173533393533373534006D796F70657261746F722E636F6D8102000
1'H
    },

ef-realm {
    fileDescriptor : {
        securityAttributesReferenced '6F0605'H,
        efFileSize '0F'H
    },
    -- domain name: myoperator.com
    fillFileContent : '0E6D796F70657261746F722E636F6D'H
    }
}
```

### 6.14.3 PE-PUKCodes

#### 6.14.3.1. PE-PUKCodes-1

##### PE-PUKCodes-1

```
pukVal ProfileElement ::= pukCodes : {
  -- PUK PE needs be right after the MF
  puk-Header {
    mandated NULL,
    identification 31
  },
  pukCodes {
    {
      keyReference pukAppl1,
      pukValue '3132333435363738'H,
      -- maxNumOfAttempts:9, retryNumLeft:9
      maxNumOfAttempts-retryNumLeft 153
    },
    {
      keyReference pukAppl2,
      pukValue '3132333435363738'H
    },
    {
      keyReference secondPUKAppl1,
      pukValue '3132333435363738'H,
      -- maxNumOfAttempts:8, retryNumLeft:8
      maxNumOfAttempts-retryNumLeft 136
    }
  }
}
```

#### 6.14.3.2. PE-PUKCodes-2

##### PE-PUKCodes-2

```
pukVal ProfileElement ::= pukCodes : {
  puk-Header {
    mandated NULL,
    identification 32
  },
  pukCodes {
    {
      keyReference pukAppl1,
      pukValue '3132333435363738'H,
      -- maxNumOfAttempts:9, retryNumLeft:9
      maxNumOfAttempts-retryNumLeft 153
    },
    {
      keyReference secondPUKAppl1,
      pukValue '3132333435363738'H,
      -- maxNumOfAttempts:8, retryNumLeft:8
      maxNumOfAttempts-retryNumLeft 136
    }
  }
}
```

### 6.14.4 PE-PINCodes

#### 6.14.4.1. PE-PINCodes-1

### PE-PINCodes-1

```
pinVal ProfileElement ::= pinCodes : {
-- the PIN codes for global PINs have to be created under
the MF context and right after the MF context
  pin-Header {
    mandated NULL,
    identification 41
  },
  pinCodes pinconfig : {
    {
      keyReference pinAppl1,
      pinValue '3132333435363738'H,
      unblockingPINReference pukAppl1
    },
    {
      keyReference pinAppl2,
      pinValue '3132333435363738'H,
      unblockingPINReference pukAppl1
    },
    {
      keyReference adm1,
      pinValue '3132333435363738'H
    }
  }
}
```

#### 6.14.4.2. PE-PINCodes-2

Compared to PE-PINCodes-1 as defined in 6.14.4.1 pinAppl1 is disabled.

### PE-PINCodes-2

```
pinVal ProfileElement ::= pinCodes : {
-- the PIN codes for global PINs have to be created under
the MF context and right after the MF context
  pin-Header {
    mandated NULL,
    identification 42
  },
  pinCodes pinconfig : {
    {
      keyReference pinAppl1,
      pinValue '3132333435363738'H,
      unblockingPINReference pukAppl1,
      -- PIN is disabled
      pinAttributes 6
    },
    {
      keyReference pinAppl2,
      pinValue '3132333435363738'H,
      unblockingPINReference pukAppl1
    },
    {
      keyReference adm1,
      pinValue '3132333435363738'H
    }
  }
}
```

#### 6.14.4.3. PE-PINCodes-3

Compared to PE-PINCodes-1 as defined in 6.14.4.1 pinAppl1 has a different unblockingPINReference.

### PE-PINCodes-3

```
pinVal ProfileElement ::= pinCodes : {
  -- the PIN codes for global PINs have to be created under
  -- the MF context and right after the MF context
  pin-Header {
    mandated NULL,
    identification 43
  },
  pinCodes pinconfig : {
    {
      keyReference pinAppl1,
      pinValue '3132333435363738'H,
      unblockingPINReference secondPUKAppl1
    },
    {
      keyReference pinAppl2,
      pinValue '3132333435363738'H,
      unblockingPINReference pukAppl1
    },
    {
      keyReference adm1,
      pinValue '3132333435363738'H
    }
  }
}
```

#### 6.14.4.4. PE-PINCodes-4

### PE-PINCodes-4

```
pinVal ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 44
  },
  pinCodes pinconfig : {
    {
      keyReference pinAppl1,
      pinValue '3132333435363738'H,
      unblockingPINReference pukAppl1
    },
    {
      keyReference adm1,
      pinValue '3132333435363738'H
    }
  }
}
```



## 6.14.5 USIM ADF

### 6.14.5.1. USIM

#### 6.14.5.1.1. *PE-USIM-by-Template-1*

#### PE-USIM-by-Template-1

```

usimValue ProfileElement ::= usim : {
    usim-header {
        mandated NULL,
        identification 511
    },
    templateID { 2 23 143 1 2 4 },
    adf-usim {
        fileDescriptor : {
            fileID '7FF1'H,
            dfName 'A0000000871002FF33FF018900000100'H,
            pinStatusTemplateDO '01810A'H
        }
    },
    ef-imsi {
        -- numerical format: 234101943787656
        fillFileContent : '082943019134876765'H
    },
    ef-arr {
        fileDescriptor : {
            linkPath '2F06'H
        }
    },
    ef-ust {
        fileDescriptor : {
            efFileSize '0F'H -- plus one byte
        }
    },

    fillFileContent : '020A04080200000000000000000000'H
},
ef-spn {
    -- ASCII format: "TCA"
    fillFileContent : '02544341'H
},
ef-est {
    -- Services deactivated
    fillFileContent : '00'H
},
ef-acc {
    -- Access class 2
    fillFileContent : '0040'H
},
ef-ecc {
    -- Emergency Call Code 911
    fillFileContent : '19F1FF01'H
},
ef-epsloci {
    -- do not create EF EPSLOCI
    doNotCreate : NULL
},

```

```

ef-epsnsc {
    -- do not create EF EPSNSC
    doNotCreate : NULL
}
}

```

#### 6.14.5.1.2.

#### USIM-by-Generic-File-Management-1

### USIM-by-Generic-File-Management-1

```

altUsimValue ProfileElement ::= genericFileManagement : {
    gfm-header {
        mandated NULL,
        identification 512
    },
    fileManagementCMD {
        {
-- ADF_USIM
            createFCP : {
                fileDescriptor '7821'H,
                fileID '7FF1'H,
                dfName 'A0000000871002FF33FF018900000100'H,
                securityAttributesReferenced '0A'H,
                pinStatusTemplateDO '01810A'H
            },

-- EF_IMSI
            createFCP : {
                fileDescriptor '4121'H,
                fileID '6F07'H,
                securityAttributesReferenced '02'H,
                efFileSize '09'H,
                shortEFID '38'H
            },
            -- provide content for EF_IMSI
            -- numerical format: 234101943787656
            fillFileContent : '082943019134876765'H,

-- EF_ARR Link
            createFCP : {
                fileDescriptor '42210025'H,
                fileID '6F06'H,
                securityAttributesReferenced '0A'H,
                shortEFID 'B8'H,
                linkPath '2F06'H
            },

-- EF_Keys
            createFCP : {
                fileDescriptor '4121'H,
                fileID '6F08'H,
                securityAttributesReferenced '05'H,
                efFileSize '21'H,
                shortEFID '40'H,
                proprietaryEFInfo {
                    specialFileInformation '80'H,
                    fillPattern '07FF'H
                }
            }
        }
    }
}

```

```

    },
-- EF_KeysPS
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F09'H,
        securityAttributesReferenced '05'H,
        efFileSize '21'H,
        shortEFID '48'H,
        proprietaryEFInfo {
            specialFileInformation '80'H,
            fillPattern '07FF'H
        }
    },
-- EF_HPPLMN
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F31'H,
        securityAttributesReferenced '02'H,
        efFileSize '01'H,
        shortEFID '90'H,
        proprietaryEFInfo {
-- specialFileInformation with Default value
            specialFileInformation '00'H,
            fillPattern '0A'H
        }
    },
-- EF_UST
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F38'H,
        securityAttributesReferenced '02'H,
        efFileSize '0E'H,
        shortEFID '20'H
    },
-- provide UST settings
    fillFileContent : '020A040802000000000000000000'H,
-- EF_FDN
    createFCP : {
        fileDescriptor '4221001A'H,
        fileID '6F3B'H,
        securityAttributesReferenced '08'H,
        efFileSize '0208'H,
        shortEFID ''H,
        proprietaryEFInfo {
            fillPattern '00FF'H
        }
    },
-- EF_SMS
    createFCP : {
        fileDescriptor '422100B0'H,
        fileID '6F3C'H,
        securityAttributesReferenced '05'H,
        efFileSize '06E0'H,

```

```

        shortEFID 'H,
        proprietaryEFInfo {
            fillPattern '00FF'H
        }
    },

-- EF_SMSP
    createFCP : {
        fileDescriptor '42210026'H,
        fileID '6F42'H,
        securityAttributesReferenced '05'H,
        efFileSize '26'H,
        shortEFID 'H

    },

-- EF_SMSS
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F43'H,
        securityAttributesReferenced '05'H,
        efFileSize '02'H,
        shortEFID 'H,
        proprietaryEFInfo {
            specialFileInformation '80'H
        }
    },

-- EF_SPN
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F46'H,
-- provide the full access rule including EF_ARR File ID
        securityAttributesReferenced '6F060A'H,
        efFileSize '11'H,
        shortEFID 'H
    },
    -- ASCII format: "TCA"
    fillFileContent : '02544341'H,

-- EF_EST
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F56'H,
        securityAttributesReferenced '08'H,
        efFileSize '01'H,
        shortEFID '28'H
    },
    -- EST Services deactivated
    fillFileContent : '00'H,

-- EF_START-HFN
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F5B'H,
        securityAttributesReferenced '05'H,
        efFileSize '06'H,
        shortEFID '78'H,
        proprietaryEFInfo {

```

```

        specialFileInformation '80'H,
-- use of repeat pattern to initialize the content
        repeatPattern 'F00000'H
    }
},

```

```
-- EF_THRESHOLD
```

```

    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F5C'H,
        securityAttributesReferenced '02'H,
        efFileSize '03'H,
        shortEFID '80'H,
        proprietaryEFInfo {
            specialFileInformation '80'H
        }
    },

```

```
-- EF_PSLOCI
```

```

    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F73'H,
        securityAttributesReferenced '05'H,
        efFileSize '0E'H,
        shortEFID '60'H,
        proprietaryEFInfo {
            specialFileInformation '80'H
        }
    },

```

```
-- Initialize PSLOCI
```

```

    fillFileOffset : 7,
    fillFileContent : '00F1100000FF01'H,

```

```
-- EF_ACC
```

```

    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F78'H,
        securityAttributesReferenced '02'H,
        efFileSize '02'H,
        shortEFID '30'H
    },

```

```
-- Provide Content for ACC
```

```
-- Access class 2
```

```

    fillFileContent : '0040'H,

```

```
-- EF_FPLMN
```

```

    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F7B'H,
        securityAttributesReferenced '05'H,
        efFileSize '0C'H,
        shortEFID '68'H
    },

```

```
-- EF_LOCI
```

```

    createFCP : {
        fileDescriptor '4121'H,
        fileID '6F7E'H,
        securityAttributesReferenced '05'H,

```

```

        efFileSize '0B'H,
        shortEFID '58'H,
        proprietaryEFInfo {
            specialFileInformation '80'H
        }
    },
    -- Initialize LOCI
    fillFileOffset : 7,
    fillFileContent : '0000FF01'H,

-- EF_AD
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6FAD'H,
        securityAttributesReferenced '0A'H,
        efFileSize '04'H,
        shortEFID '18'H,
        proprietaryEFInfo {
-- use of fillPattern in Combination with fillFileContent
(not efficient in this example)
            fillPattern '00'H
        }
    },
    -- Initialize AD
    fillFileOffset : 3,
    fillFileContent : '02'H,

-- EF_ECC
    createFCP : {
        fileDescriptor '42210004'H,
        fileID '6FB7'H,
        securityAttributesReferenced '0A'H,
        efFileSize '04'H,
        shortEFID '08'H
    },
    -- Initialize ECC
    -- Emergency Call Code 911
    fillFileContent : '19F1FF01'H,

-- EF_NETPAR
    createFCP : {
        fileDescriptor '4121'H,
        fileID '6FC4'H,
        securityAttributesReferenced '05'H,
        efFileSize '80'H,
        shortEFID ''H,
        proprietaryEFInfo {
            specialFileInformation '80'H
        }
    }

-- EF_EPSLOCI is not created to have the same
configuration as in PE_-USIM-by-Template-1
-- EF_EPSNSC is not created to have the same configuration
as in PE_-USIM-by-Template-1

    }
}
}

```

### 6.14.5.1.3. PE-USIM-by-Template-2

The content of PE-USIM-by Template-2 is identical to PE-USIM-by-Template-1, with the exception of the content of EF UST which has been adapted to the use of PE-OPT-USIM-by-Template-2.

#### PE-USIM-by-Template-2

```
usimValue ProfileElement ::= usim : {
  usim-header {
    mandated NULL,
    identification 513
  },
  templateID { 2 23 143 1 2 4 },
  adf-usim {
    fileDescriptor : {
      fileID '7FF1'H,
      dfName 'A0000000871002FF33FF018900000100'H,
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-imsi {
    -- numerical format: 234101943787656
    fillFileContent : '082943019134876765'H
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-ust {
    fileDescriptor : {
      efFileSize '0F'H -- plus one byte
    },
    fillFileContent : '020A040802000000000000004000000'H
  },
  ef-spn {
    -- ASCII format: "TCA"
    fillFileContent : '02544341'H
  },
  ef-est {
    -- Services deactivated
    fillFileContent : '00'H
  },
  ef-acc {
    -- Access class 2
    fillFileContent : '0040'H
  },
  ef-ecc {
    -- Emergency Call Code 911
    fillFileContent : '19F1FF01'H
  },
  ef-epsloci {
    -- do not create EF EPSLOCI
    doNotCreate : NULL
  },
  ef-epsnsc {
```

```

-- do not create EF EPSNSC
doNotCreate : NULL
}
}

```

#### 6.14.5.1.4. USIM-by-Generic-File-Management-2

The content is identical to 6.14.5.1.2 USIM-by-Generic-File-Management-1, except:

- the value of identification field which equals 514
- EF UST which is defined below:

```

-- EF_UST
createFCP : {
    fileDescriptor '4121'H,
    fileID '6F38'H,
    securityAttributesReferenced '02'H,
    efFileSize '0E'H,
    shortEFID '20'H
},
-- provide UST settings
-- including EF Ext5
fillFileContent : '020A140802080000000000000000'H,

```

#### 6.14.5.1.5. PE-USIM-by-Template-3

The content is identical to 6.14.5.1.1 PE-USIM-by-Template-1, except:

- the value of identification field which equals 515
- the content of EF UST, which is defined below:

```

ef-ust {
    fileDescriptor : {
        efFileSize '0F'H -- plus one byte
    },
    -- including EF Ext 5, EF PSISMSC
    fillFileContent : '020A140802080000000000004000000'H
}

```

#### 6.14.5.1.6. PE-USIM-by-Template-4

The content is identical to 6.14.5.1.1 PE-USIM-by-Template-1, except:

- the value of identification field which equals 516
- the content of EF UST, which is defined below:

```

ef-ust {
    fileDescriptor : {
        efFileSize '0F'H -- plus one byte
    },
    -- including EF Ext 5, EF PSISMSC, ber tlv
    fillFileContent : '020A1408020800000040000004000000'H
}

```



### 6.14.5.1.7. PE-USIM-by-Template-5

The content is identical to 6.14.5.1.1 PE-USIM-by-Template-1, except:

- the value of identification field which equals 517
- the content of EF UST, which is defined below:

```
ef-ust {
  fileDescriptor : {
    efFileSize '0F'H -- plus one byte
  },
  -- including GSM Access, CPBCH Information and
  Investigation Scan
  fillFileContent : '020A140CC20800000000004000000'H
}
```

### 6.14.5.1.8. PE-USIM-by-Template-6

#### PE-USIM-by-Template-6

```
usimValue ProfileElement ::= usim : {
  usim-header {
    mandated NULL,
    identification 518
  },
  templateID {2 23 143 1 2 4},
  adf-usim {
    fileDescriptor : {
      fileID '7FF1'H,
      dfName 'A0000000871002FF33FF018900000100'H,
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-imsi {
    -- numerical format: 234101943787656
    fillFileContent : '082943019134876765'H
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-ust {
    fillFileContent : '020A040802000000000010000000'H
  },
  ef-spn {
    -- ASCII format: "TCA"
    fillFileContent : '02544341'H
  },
  ef-est {
    -- Services deactivated
    fillFileContent : '00'H
  },
  ef-acc {
    -- Access class 2
    fillFileContent : '0040'H
  },
  ef-ecc {
    -- Emergency Call Code 911
    fillFileContent : '19F1FF01'H
  }
}
```

```

},
ef-epsloci {
  fileDescriptor : {
    proprietaryEFInfo {
      specialFileInformation '80'H
    }
  }
}
}

```

#### 6.14.5.1.9. PE-USIM-by-Template-7

The content is identical to 6.14.5.1.5 PE-USIM-by-Template-3, except the content of adf usim

#### PE-USIM-by-Template-7

```

usimValue ProfileElement ::= usim : {
  usim-header {
    mandated NULL,
    identification 519
  },
  templateID { 2 23 143 1 2 4 },
  adf-usim {
    fileDescriptor : {
      fileID '7FF2'H,
      dfName 'A00000008710020000000000000000200'H,
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-imsi {
    fillFileContent : '082943019134876765'H
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-ust {
    fileDescriptor : {
      efFileSize '0F'H
    },
    fillFileContent : '020A140802080000000000004000000'H
  },
  ef-spn {
    fillFileContent : '02544341'H
  },
  ef-est {
    fillFileContent : '00'H
  },
  ef-acc {
    fillFileContent : '0040'H
  },
  ef-ecc {
    fillFileContent : '19F1FF01'H
  },
  ef-epsloci {
    doNotCreate : NULL
  },

```

```

ef-epsnsc {
    doNotCreate : NULL
}
}

```

#### 6.14.5.1.10. PE-USIM-by-Template-8

It contains ef ust with service 124 and 125 are for SUCI.

#### PE-USIM-by-Template-8

```

usimValue ProfileElement ::= usim : {
    usim-header {
        mandated NULL,
        identification 5110
    },
    templateID {2 23 143 1 2 4},
    adf-usim {
        fileDescriptor : {
            fileID '7FF1'H,
            dfName 'A0000000871002FF33FF018900000100'H,
            pinStatusTemplateDO '01810A'H
        }
    },
    ef-imsi {
        -- numerical format: 234101943787656
        fillFileContent : '082943019134876765'H
    },
    ef-arr {
        fileDescriptor : {
            linkPath '2F06'H
        }
    },
    ef-ust {
        fileDescriptor : {
            efFileSize '11'H
        },
        -- service 124 and 125 are activated for SUCI
        fillFileContent :
'020A04080200000000000000000000001800'H
    },
    ef-spn {
        -- ASCII format: "TCA"
        fillFileContent : '02544341'H
    },
    ef-est {
        -- Services deactivated
        fillFileContent : '00'H
    },
    ef-acc {
        -- Access class 2
        fillFileContent : '0040'H
    },
    ef-ecc {
        -- Emergency Call Code 911
        fillFileContent : '19F1FF01'H
    },
    ef-epsloci {

```

```

-- do not create EF EPSLOC1
doNotCreate : NULL
},
ef-epsnsc {
-- do not create EF EPSNSC
doNotCreate : NULL
}
}

```

#### 6.14.5.1.11. PE-USIM-by-Template-1-v2

The content is identical to 6.14.5.1.1 PE-USIM-by-Template-1, except:

- the value of `identification` field which equals 5111
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.12. PE-USIM-by-Template-2-v2

The content is identical to 6.14.5.1.3 PE-USIM-by-Template-2, except:

- the value of `identification` field which equals 5112
- the value of `templateID` field which equals {2 23 143 1 2 4 2}
- the content of EF UST, which is defined below:

```

ef-ust {
fillFileContent : '020A04080200000000000000400000000000'H
}

```

#### 6.14.5.1.13. PE-USIM-by-Template-3-v2

The content is identical to 6.14.5.1.5 PE-USIM-by-Template-3, except:

- the value of `identification` field which equals 5113
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.14. PE-USIM-by-Template-4-v2

The content is identical to 6.14.5.1.6 PE-USIM-by-Template-4, except:

- the value of `identification` field which equals 5114
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.15. PE-USIM-by-Template-5-v2

The content is identical to 6.14.5.1.7 PE-USIM-by-Template-5, except:

- the value of `identification` field which equals 5115
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.16. PE-USIM-by-Template-6-v2

The content is identical to 6.14.5.1.8 PE-USIM-by-Template-6, except:

- the value of `identification` field which equals 5116
- the value of `templateID` field which equals {2 23 143 1 2 4 2}
- the content of EF UST, which is defined below:

```
ef-ust {
  fillFileContent : '020A0408020000000000100000000000'H
}
```

#### 6.14.5.1.17. PE-USIM-by-Template-7-v2

The content is identical to 6.14.5.1.9 PE-USIM-by-Template-7, except:

- the value of `identification` field which equals 5117
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.18. PE-USIM-by-Template-8-v2

The content is identical to 6.14.5.1.10 PE-USIM-by-Template-8, except:

- the value of `identification` field which equals 5118
- the value of `templateID` field which equals {2 23 143 1 2 4 2}
- the content of EF UST, which is defined below:

```
ef-ust {
  -- service 124 and 125 are activated for SUCI
  fillFileContent : '020A040802000000000000000000001800'H
}
```

#### 6.14.5.1.19. PE-USIM-by-Template-9

The content is identical to 6.14.5.1.1 PE-USIM-by-Template-1, except:

- the value of `identification` field which equals 5119
- the content of EF UST (including GBA and MBMS services), which is defined below:

```
ef-ust {
  fileDescriptor : {
    efFileSize '0F'H -- plus one byte
  },
  -- including GBA and MBMS security
  fillFileContent : '220A04080200000018001000000000'H
}
```

#### 6.14.5.1.20. PE-USIM-by-Template-9-v2

The content is identical to 6.14.5.1.19 PE-USIM-by-Template-9, except:

- the value of `identification` field which equals 5120
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.21. PE-USIM-by-Template-10-v2

The content is identical to 6.14.5.1.14 PE-USIM-by-Template-4-v2, except:

- the value of `identification` field which equals 5121
- the content of EF UST which is defined below:

```
ef-ust {
  fileDescriptor : {
    efFileSize '0F'H -- plus one byte
  },
```

```
-- including MCS and V2X
fillFileContent : '020A140802080000000000004001040'H
}
```

#### 6.14.5.1.22. PE-USIM-by-Template-11-v2

The content is identical to 6.14.5.1.10 PE-USIM-by-Template-8, except:

- the value of `identification` field which equals 5122
- the value of `templateID` field which equals {2 23 143 1 2 4 2}
- the content of EF UST, which is defined below:

```
ef-ust {
  -- service 124 and 125 are activated for SUCI
  -- service 132 activated for URSP by USIM
  -- service 135 activated for Trusted non-3GPP access
  networks by USIM
  fillFileContent : '020A040802000000000000000000000001848'H
}
```

#### 6.14.5.1.23. PE-USIM-by-Template-12-v2

The content is identical to 6.14.5.1.12 PE-USIM-by-Template-2-v2, except:

- the value of `identification` field which equals 5123
- the file size of EF UST, which is 17 bytes (the default value)
- the content of EF UST, which is defined below and matching the content of PE-OPT-USIM-by-Template-7-v2 and PE-OPT-USIM-by-Template-8-v3:

```
ef-ust {
  fillFileContent : 'FEFF9F091FFE9D8341E200C42166B60120'H
},
```

#### 6.14.5.1.24. PE-USIM-by-Template-13-v2

It contains ef ust with services 124 and 125 for SUCI, and service 130 for SUPI of type NSI or GLI or GCI. ADF USIM AID is the one of allocated for non-IMSI SUPI Type.

The 4<sup>th</sup> byte of EF AD is set to '0'.

#### PE-USIM-by-Template-13-v2

```
usimValue ProfileElement ::= usim : {
  usim-header {
    mandated NULL,
    identification 5124
  },
  templateID {2 23 143 1 2 4 2},
  adf-usim {
    fileDescriptor : {
      fileID '7FF1'H,
      dfName 'A000000087100BFF33FF018900000100'H,
      pinStatusTemplateDO '01810A'H
    }
  },
},
```

[illegible]

## 6.14.5.1.25 PE-USIM-by-Template-14-v2

The content is identical to 6.14.5.1.10 PE-USIM-by-Template-8-v2, except:

- the value of `identification` field which equals 5125
- the content of EF UST, which is defined below: (activating service 136)

```
ef-ust {  
    -- service 124 and 125 are activated for SUCI  
    -- service 136 activated for Support for multiple records of NAS  
security context storage  
    fillFileContent: '020A04080200000000000000000000001880'H  
}
```

## 6.14.5.1.26 PE-USIM-by-Template-15-v2

The content is identical to 6.14.5.1.22 PE-USIM-by-Template-11-v2, except:

- the value of `identification` field which equals 5126
- the content of EF UST, which is defined below: (activating service 136)

```
ef-ust {
    -- service 124 and 125 are activated for SUCI
    -- service 132 activated for URSP by USIM
    -- service 135 activated for Trusted non-3GPP access networks by USIM
    -- service 136 activated for Support for multiple records of NAS
security context storage
    fillFileContent : '020A040802000000000000000000000018C8'H
}
```

## 6.14.5.1.27 PE-USIM-by-Template-16-v2

The content is identical to 6.14.5.1.24 PE-USIM-by-Template-13-v2, except:

- the value of `identification` field which equals 5127
- the content of EF UST, which is defined below: (activating service 136)

```
ef-ust {
    fileDescriptor : {
        efFileSize '11'H
    },
    -- service 124 and 125 are activated for SUCI
    -- service 130 is activated for SUPI of type NSI or GLI or GCI
    -- service 136 activated for Support for multiple records of NAS
    security context storage
    fillFileContent : '020A04080200000000000000000000001882'H
}
```

## 6.14.5.1.28 PE-USIM-by-Template-17

The content is identical to 6.14.5.1.1 PE-USIM-by-Template-1, except:

- the value of `identification` field which equals 5128
- Services made available under USIM Service Table as -
  - Service N°27 (GSM Access),
  - Service N°38 (GSM Security Context) and
  - Service N°85 (EPS Mobility Management Information).
- EF EPSLOC and EF EPSNSC are created.



## PE-USIM-by-Template-17

```

usimValue ProfileElement ::= usim : {
    usim-header {
        mandated NULL,
        identification 5128
    },
    templateID { 2 23 143 1 2 4 },
    adf-usim {
        fileDescriptor : {
            fileID '7FF1'H,
            dfName 'A0000000871002FF33FF018900000100'H,
            pinStatusTemplateDO '01810A'H
        }
    },
    ef-imsi {
        -- numerical format: 234101943787656
        fillFileContent : '082943019134876765'H
    },
    ef-arr {
        fileDescriptor : {
            linkPath '2F06'H
        }
    },
    ef-ust {
        fileDescriptor : {
            efFileSize '0F'H -- plus one byte
        },
        fillFileContent : '020A040C2200000000001000000000'H
    },
    ef-spn {
        -- ASCII format: "TCA"
        fillFileContent : '02544341'H
    },
    ef-est {
        -- Services deactivated
        fillFileContent : '00'H
    },
    ef-acc {
        -- Access class 2
        fillFileContent : '0040'H
    },
    ef-ecc {
        -- Emergency Call Code 911
        fillFileContent : '19F1FF01'H
    },
    ef-epsloci{
    },
    ef-epsnsc {
    }
}

```

#### 6.14.5.1.29 PE-USIM-by-Template-17-v2

The content is identical to 6.14.6.2.1 PE-USIM-by-Template-17, except:

- the value of `identification` field which equals 5129
- the value of `templateID` field which equals {2 23 143 1 2 4 2}

#### 6.14.5.1.30 PE-USIM-by-Template-18-v2

The content is identical to 6.14.5.1.22. PE-USIM-by-Template-11-v2, except:

- the value of `identification` field which equals 5130
- the size of EF UST which is set to 19
- the content of EF UST, which is defined below: (activating service 136, 137, 138, 139, 140, 141, 142, 143, 144, 145)

```
ef-ust {
    fileDescriptor : {
        efFileSize '13'H -- 19 bytes
    },
    -- service 136 activated for Support for multiple records of NAS
security context storage
    -- service 137 activated for Pre-configured CAG information list
    -- service 138 activated for SOR-CMCI storage in USIM
    -- service 139 activated for 5G ProSe
    -- service 140 activated for Storage of disaster roaming information
in USIM
    -- service 141 activated for Pre-configured eDRX parameters
    -- service 142 activated for 5G NSWO support
    -- service 143 activated for PWS configuration for SNPN in USIM
    -- service 144 activated for Multiplier Coefficient for Higher Priority
PLMN search via NG-RAN satellite access
    -- service 145 activated for KAUSF derivation configuration
    fillFileContent : '020A040802000000000000000000000018C8FF01'H
}
```

#### 6.14.5.1.31 PE-USIM-by-Template-19

Same as PE-USIM-by-Template-1, except the template version number in the `templateID`.

#### PE-USIM-by-Template-19

```
usimValue ProfileElement ::= usim : {
    usim-header {
        mandated NULL,
        identification 5131
    },
    templateID { 2 23 143 1 2 4 100},
    adf-usim {
        fileDescriptor : {
            fileID '7FF1'H,
            dfName 'A0000000871002FF33FF018900000100'H,
            pinStatusTemplateDO '01810A'H
        }
    },
    ef-imsi {
        -- numerical format: 234101943787656
    }
}
```

```

    fillFileContent : '082943019134876765'H
},
ef-arr {
    fileDescriptor : {
        linkPath '2F06'H
    }
},
ef-ust {
    fileDescriptor : {
        efFileSize '0F'H -- plus one byte
    },

```

```

    fillFileContent : '020A04080200000000000000000000'H
},
ef-spn {
    -- ASCII format: "TCA"
    fillFileContent : '02544341'H
},
ef-est {
    -- Services deactivated
    fillFileContent : '00'H
},
ef-acc {
    -- Access class 2
    fillFileContent : '0040'H
},
ef-ecc {
    -- Emergency Call Code 911
    fillFileContent : '19F1FF01'H
},
ef-epsloci {
    -- do not create EF EPSLOCI
    doNotCreate : NULL
},
ef-epsnsc {
    -- do not create EF EPSNSC
    doNotCreate : NULL
}
}

```

### 6.14.5.2. OPT-USIM

#### 6.14.5.2.1. *PE-OPT-USIM-by-Template-1*

##### PE-OPT-USIM(by-Template)-1

```

optusimValue ProfileElement ::= opt-usim : {
  optusim-header {
    mandated NULL,
    identification 521
  },
  templateID { 2 23 143 1 2 5 },
  ef-li {
  },
  ef-msisdn {
  },
  ef-ext5 {
  },
  ef-ipd {
    fileDescriptor : {
      fileDescriptor '42210010'H,
      efFileSize '10'H
    }
  }
}

```

#### 6.14.5.2.2. *OPT-USIM-by-Generic-File-Management-1*

##### OPT-USIM-by-Generic-File-Management-1

```

gmOptUsimValue ProfileElement ::= genericFileManagement :
{
  gfm-header {
    mandated NULL,
    identification 522
  },

  fileManagementCMD {
    {
-- Context: ADF USIM (temp. File ID)
      filePath : '7FF1'H,

-- ef-li
      createFCP : {
        fileDescriptor '4121'H,
        fileID '6F05'H,
        securityAttributesReferenced '01'H,
        efFileSize '06'H,
        shortEFID '10'H
      },

-- ef-ext5
      createFCP : {
        fileDescriptor '4221000D'H,
        fileID '6F4E'H,
        securityAttributesReferenced '05'H,
        efFileSize '82'H,
        shortEFID ''H
      },

```

```

-- ef-msisdn
createFCP : {
    fileDescriptor '42210018'H,
    fileID '6F40'H,
    securityAttributesReferenced '02'H,
    efFileSize '18'H,
    shortEFID ''H
},
-- ef-ipd
createFCP : {
    fileDescriptor '42210010'H,
    fileID '6FF2'H,
    securityAttributesReferenced '03'H,
    efFileSize '10'H,
    shortEFID ''H
}
}
}
}

```

#### 6.14.5.2.3.

#### PE-OPT-USIM-by-Template-2

### PE-OPT-USIM(by-Template)-2

```

optusimValue ProfileElement ::= opt-usim : {
    optusim-header {
        mandated NULL,
        identification 523
    },
    templateID { 2 23 143 1 2 5 },

    ef-li {
    },
    ef-acmax {
    },
    ef-acm {
    },
    ef-gid1 {
        fillFileContent : '0102030405060708'H
    },
    ef-gid2 {
        fillFileContent : '0203040506070809'H
    },
    ef-msisdn {
    },
    ef-puct {
    },
    ef-cbmi {
    },
    ef-cbmid {
    },
    ef-sdn {
    },
    ef-ext2 {
    },
    ef-ext3 {
    },
    ef-cbmir {
    },

```

```

},
ef-plmnwact {
},
ef-oplmnwact {
},
ef-hplmnwact {
},
ef-dck {
},
ef-cn1 {
},
ef-smsr {
},
ef-bdn {
},
ef-ext5 {
},
ef-ccp2 {
},
ef-ext4 {
},
ef-acl {
},
ef-cmi {
},
ef-ici {
},
ef-oci {
},
ef-ict {
},
ef-oct {
},
ef-vgcs {
    fillFileContent :
'0102030405060708091011121314151617181920'H
},
ef-vgcss {
    fillFileContent : '11121314151617'H
},
ef-vbs {
    fillFileContent :
'1112131415161718192001020304050607080910'H
},
ef-vbss {
    fillFileContent : '02030405060708'H
},
ef-emlpp {
    fillFileContent : '0405'H
},
ef-aaem {
},
ef-hiddenkey {
},
ef-pnn {
    fillFileContent : '11020304050607080910111213141511'H,
    fillFileContent : '12020304050607080910111213141512'H,
    fillFileContent : '13020304050607080910111213141513'H,
    fillFileContent : '14020304050607080910111213141514'H,

```

```

    fillFileContent : '15020304050607080910111213141515'H,
    fillFileContent : '16020304050607080910111213141516'H,
    fillFileContent : '17020304050607080910111213141517'H,
    fillFileContent : '18020304050607080910111213141518'H,
    fillFileContent : '19020304050607080910111213141519'H,
    fillFileContent : '20020304050607080910111213141520'H
  },
  ef-opl {
    fillFileContent :
'210203040506070809101112131415161721'H,
    fillFileContent :
'220203040506070809101112131415161722'H,
    fillFileContent :
'230203040506070809101112131415161723'H,
    fillFileContent :
'240203040506070809101112131415161724'H,
    fillFileContent :
'250203040506070809101112131415161725'H
  },
  ef-mbdn {
    fillFileContent :
'010203040506070809101112131415161718192021222324'H,
    fillFileContent :
'020203040506070809101112131415161718192021222302'H,
    fillFileContent :
'030203040506070809101112131415161718192021222303'H
  },
  ef-ext6 {
  },
  ef-mbi {
    fillFileContent : '1102030411'H,
    fillFileContent : '2202030422'H,
    fillFileContent : '3302030433'H,
    fillFileContent : '4402030444'H,
    fillFileContent : '5502030455'H,
    fillFileContent : '6602030466'H,
    fillFileContent : '7702030477'H,
    fillFileContent : '8802030488'H,
    fillFileContent : '9902030499'H,
    fillFileContent : '0002030411'H
  },
  ef-mwis {
  },
  ef-cfis {
  },
  ef-ext7 {
  },
  ef-spdi {
    fileDescriptor : {
      efFileSize '07'H
    },
    fillFileContent : 'A3058003FFFFFF'H
  },
  ef-mmsn {
  },
  ef-ext8 {
  },
  ef-mmsicp {
  },

```

```
ef-mmsup {
    fileDescriptor : {
        fileDescriptor '42210040'H,
        efFileSize '40'H
    }
},
ef-mmsucp {
},
ef-nia {
},
ef-vgcsca {
    fileDescriptor : {
        efFileSize '08'H
    }
},
ef-vbsca {
    fileDescriptor : {
        efFileSize '06'H
    }
},
-- ef-gbabp not included
-- ef-msk    not included
-- ef-muk    not included

ef-ehplmn {
},
-- ef-gbanl not included

ef-ehplmnp {
},
ef-lrplmnsi {
},
-- ef-nafkca not included

ef-spni {
    fileDescriptor : {
        efFileSize '20'H
    }
},
ef-pnni {
    fileDescriptor : {
        fileDescriptor '42210030'H,
        efFileSize '30'H
    }
},
ef-ncp-ip {
    fileDescriptor : {
        fileDescriptor '42210010'H,
        efFileSize '10'H
    },
fillFileContent : '16020304050607080910111213141516'H
},
ef-ufc {
},
ef-nasconfig {
    fillFileContent :
'180203040506070809101112131415161718'H
},
ef-uicciari {
```



```

    fileDescriptor : {
      fileDescriptor '42210014'H,
      efFileSize '14'H
    },
    fillFileContent :
'2002030405060708091011121314151617181920'H
  },
  ef-pws {
    fileDescriptor : {
      efFileSize '0F'H
    },
    fillFileContent : '150203040506070809101112131415'H
  },
  ef-fdnuri {
    fileDescriptor : {
      fileDescriptor '4221000E'H,
      efFileSize '0E'H
    }
  },
  ef-bdnuri {
    fileDescriptor : {
      fileDescriptor '4221000D'H,
      efFileSize '0D'H
    }
  },
  ef-sdnuri {
    fileDescriptor : {
      fileDescriptor '4221000C'H,
      efFileSize '0C'H
    }
  },
  ef-ial {
    fileDescriptor : {
      fileDescriptor '42210012'H,
      efFileSize '48'H
    },
    fillFileContent :
'801001020304050607080910111213141516'H,
    fillFileContent :
'811002020304050607080910111213141516'H,
    fillFileContent :
'811003020304050607080910111213141516'H,
    fillFileContent :
'801004020304050607080910111213141516'H
  },
  ef-ips {
    fileDescriptor : {
      efFileSize '08'H
    }
  },
  ef-ipd {
    fileDescriptor : {
      fileDescriptor '42210010'H,
      efFileSize '10'H
    }
  }
}

```

## 6.14.5.2.4.

*PE-OPT-USIM-by-Template-3*

The content is identical to PE-OPT-USIM-by-Template-2 as defined in 6.14.5.2.3, except:

- the value of identification field which equals 524
- the content of EF GID1 and EF-GID2, which are defined below:

**PE-OPT-USIM(by-Template)-3**

```
ef-gid1 {
},
ef-gid2 {
},
```

## 6.14.5.2.5.

*PE-OPT-USIM-by-Template-4***PE-OPT-USIM(by-Template)-4**

```
optusimValue ProfileElement ::= opt-usim : {
  optusim-header {
    mandated NULL,
    identification 525
  },
  templateID { 2 23 143 1 2 5 },
  ef-li {
  },
  ef-gid1 {
    fillFileContent : '00'H
  },
  ef-gid2 {
    fillFileContent : '00'H
  },
  ef-msisdn {
  },
  ef-ext5 {
  },
  ef-ipd {
    fileDescriptor : {
      fileDescriptor '42210010'H,
      efFileSize '10'H
    }
  }
}
```

## 6.14.5.2.6.

*PE-OPT-USIM-by-Template-1-v2*

The content is identical to 6.14.5.2.1 PE-OPT-USIM-by-Template-1, except:

- the value of identification field which equals 526
- the value of templateID field which equals to {2 23 143 1 2 5 2}

## 6.14.5.2.7.

*PE-OPT-USIM-by-Template-2-v2*

The content is identical to 6.14.5.2.3 PE-OPT-USIM-by-Template-2, except:

- the value of identification field which equals 527

- the value of `templateID` field which equals to {2 23 143 1 2 5 2}
- the content of EF OPL, which is defined below:

```
ef-opl {
  fillFileContent : '2102030405060708'H,
  fillFileContent : '2202030405060708'H,
  fillFileContent : '2302030405060708'H,
  fillFileContent : '2402030405060708'H,
  fillFileContent : '2502030405060708'H
}
```

#### 6.14.5.2.8. *PE-OPT-USIM-by-Template-3-v2*

The content is identical to 6.14.5.2.4 PE-OPT-USIM-by-Template-3, except:

- the value of `identification` field which equals 528
- the value of `templateID` field which equals to {2 23 143 1 2 5 2}
- the content of EF OPL, which is defined below:

```
ef-opl {
  fillFileContent : '2102030405060708'H,
  fillFileContent : '2202030405060708'H,
  fillFileContent : '2302030405060708'H,
  fillFileContent : '2402030405060708'H,
  fillFileContent : '2502030405060708'H
}
```

#### 6.14.5.2.9. *PE-OPT-USIM-by-Template-4-v2*

The content is identical to 6.14.5.2.5 PE-OPT-USIM-by-Template-4, except:

- the value of `identification` field which equals 529
- the value of `templateID` field which equals to {2 23 143 1 2 5 2}

#### 6.14.5.2.10. *PE-OPT-USIM-by-Template-5*

This is a not mandated PE.

#### PE-OPT-USIM(by-Template)-5

```
optusimValue ProfileElement ::= opt-usim : {
  optusim-header {
    identification 5210
  },
  templateID { 2 23 143 1 2 5 },
  ef-li {
  },
  ef-msisdn {
  },
  ef-ext5 {
  },
  ef-gbap {
    fileDescriptor : {
      efFileSize '20'H
    }
  },
}
```

```

ef-msk {
  fileDescriptor : {
    fileDescriptor '42210014'H,
    efFileSize '14'H
  }
},
ef-muk {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-gbanl {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-nafkca {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-ipd {
  fileDescriptor : {
    fileDescriptor '42210004'H,
    efFileSize '10'H
  }
}
}

```

#### 6.14.5.2.11.

#### PE-OPT-USIM-by-Template-6

### PE-OPT-USIM(by-Template)-6

```

optusimValue ProfileElement ::= opt-usim : {
  optusim-header {
    mandated NULL,
    identification 5211
  },
  templateID { 2 23 143 1 2 5 },
  ef-li {
  },
  ef-msisdn {
  },
  ef-ext5 {
  },
  ef-gbapb {
    fileDescriptor : {
      efFileSize '20'H
    }
  },
  ef-msk {
    fileDescriptor : {
      fileDescriptor '42210014'H,
      efFileSize '14'H
    }
  },
}

```

```

ef-muk {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-gbanl {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-nafkca {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-ipd {
  fileDescriptor : {
    fileDescriptor '42210004'H,
    efFileSize '10'H
  }
}
}

```

#### 6.14.5.2.12. *PE-OPT-USIM-by-Template-5-v2*

The content is identical to 6.14.5.2.10 PE-OPT-USIM-by-Template-5, except:

- the value of `identification` field which equals 5212
- the value of `templateID` field which equals to {2 23 143 1 2 5 2}

#### 6.14.5.2.13. *PE-OPT-USIM-by-Template-6-v2*

The content is identical to 6.14.5.2.11 PE-OPT-USIM-by-Template-6, except:

- the value of `identification` field which equals 5213
- the value of `templateID` field which equals to {2 23 143 1 2 5 2}

#### 6.14.5.2.14. *PE-OPT-USIM-by-Template-7-v2*

It contains the new files added in v2 template.

#### PE-OPT-USIM(by-Template)-7-v2

```

optusimValue ProfileElement ::= opt-usim : {
  optusim-header {
    mandated NULL,
    identification 5214
  },
  templateID { 2 23 143 1 2 5 2},

  ef-li {
  },
  ef-acmax {
  },
  ef-acm {

```

```
},
ef-gidl {
},
ef-gid2 {
},
ef-msisdn {
},
ef-puct {
},
ef-cbmi {
},
ef-cbmid {
},
ef-sdn {
},
ef-ext2 {
},
ef-ext3 {
},
ef-cbmir {
},
ef-plmnwact {
},
ef-oplmnwact {
},
ef-hplmnwact {
},
ef-dck {
},
ef-cn1 {
},
ef-smsr {
},
ef-bdn {
},
ef-ext5 {
},
ef-ccp2 {
},
ef-ext4 {
},
ef-acl {
},
ef-cmi {
},
ef-ici {
},
ef-oci {
},
ef-ict {
},
ef-oct {
},
ef-vgcs {
    fillFileContent :
'0102030405060708091011121314151617181920'H
},
ef-vgcss {
    fillFileContent : '11121314151617'H
```

```

    },
    ef-vbs {
        fillFileContent :
'1112131415161718192001020304050607080910'H
    },
    ef-vbss {
        fillFileContent : '02030405060708'H
    },
    ef-emlpp {
        fillFileContent : '0405'H
    },
    ef-aaem {
    },
    ef-hiddenkey {
    },
    ef-pnn {
        fillFileContent : '11020304050607080910111213141511'H,
        fillFileContent : '12020304050607080910111213141512'H,
        fillFileContent : '13020304050607080910111213141513'H,
        fillFileContent : '14020304050607080910111213141514'H,
        fillFileContent : '15020304050607080910111213141515'H,
        fillFileContent : '16020304050607080910111213141516'H,
        fillFileContent : '17020304050607080910111213141517'H,
        fillFileContent : '18020304050607080910111213141518'H,
        fillFileContent : '19020304050607080910111213141519'H,
        fillFileContent : '20020304050607080910111213141520'H
    },
    ef-opl {
        fillFileContent : '2102030405060708'H,
        fillFileContent : '2202030405060708'H,
        fillFileContent : '2302030405060708'H,
        fillFileContent : '2402030405060708'H,
        fillFileContent : '2502030405060708'H
    },
    ef-mbdn {
        fillFileContent :
'010203040506070809101112131415161718192021222324'H,
        fillFileContent :
'020203040506070809101112131415161718192021222302'H,
        fillFileContent :
'030203040506070809101112131415161718192021222303'H
    },
    ef-ext6 {
    },
    ef-mbi {
        fillFileContent : '1102030411'H,
        fillFileContent : '2202030422'H,
        fillFileContent : '3302030433'H,
        fillFileContent : '4402030444'H,
        fillFileContent : '5502030455'H,
        fillFileContent : '6602030466'H,
        fillFileContent : '7702030477'H,
        fillFileContent : '8802030488'H,
        fillFileContent : '9902030499'H,
        fillFileContent : '0002030411'H
    },
    ef-mwis {
    },
    ef-cfis {

```

```
},
ef-ext7 {
},
ef-spdi {
  fileDescriptor : {
    efFileSize '07'H
  },
  fillFileContent : 'A3058003FFFFFF'H
},
ef-mmsn {
},
ef-ext8 {
},
ef-mmsicp {
},
ef-mmsup {
  fileDescriptor : {
    fileDescriptor '42210040'H,
    efFileSize '40'H
  }
},
ef-mmsucp {
},
ef-nia {
},
ef-vgcsca {
  fileDescriptor : {
    efFileSize '08'H
  }
},
ef-vbsca {
  fileDescriptor : {
    efFileSize '06'H
  }
},
-- ef-gbabp not included
-- ef-msk    not included
-- ef-muk    not included

ef-ehplmn {
},
-- ef-gbanl not included

ef-ehplmnp {
},
ef-lrplmnsi {
},
-- ef-nafkca not included

ef-spni {
  fileDescriptor : {
    efFileSize '20'H
  }
},
ef-pnni {
  fileDescriptor : {
    fileDescriptor '42210030'H,
    efFileSize '30'H
  }
}
```



```

    },
    ef-ncp-ip {
        fileDescriptor : {
            fileDescriptor '42210010'H,
            efFileSize '10'H
        },
        fillFileContent : '16020304050607080910111213141516'H
    },
    ef-ufc {
    },
    ef-nasconfig {
        fillFileContent :
'180203040506070809101112131415161718'H
    },
    ef-uicciari {
        fileDescriptor : {
            fileDescriptor '42210014'H,
            efFileSize '14'H
        },
        fillFileContent :
'2002030405060708091011121314151617181920'H
    },
    ef-pws {
        fileDescriptor : {
            efFileSize '0F'H
        },
        fillFileContent : '150203040506070809101112131415'H
    },
    ef-fdnuri {
        fileDescriptor : {
            fileDescriptor '4221000E'H,
            efFileSize '0E'H
        }
    },
    ef-bdnuri {
        fileDescriptor : {
            fileDescriptor '4221000D'H,
            efFileSize '0D'H
        }
    },
    ef-sdnuri {
        fileDescriptor : {
            fileDescriptor '4221000C'H,
            efFileSize '0C'H
        }
    },
    ef-ial {
        fileDescriptor : {
            fileDescriptor '42210012'H,
            efFileSize '48'H
        },
        fillFileContent :
'801001020304050607080910111213141516'H,
        fillFileContent :
'811002020304050607080910111213141516'H,
        fillFileContent :
'811003020304050607080910111213141516'H,
        fillFileContent :
'801004020304050607080910111213141516'H
    },

```

```

ef-ips {
    fileDescriptor : {
        efFileSize '08'H
    }
},
ef-ipd {
    fileDescriptor : {
        fileDescriptor '42210010'H,
        efFileSize '10'H
    }
},
ef-epdgid {
    fileDescriptor : {
        efFileSize '10'H
    },
    fillFileContent : '01020304050607080910111213141516'H
},
ef-epdgselection {
    fileDescriptor : {
        efFileSize '0A'H
    },
    fillFileContent : '01020304050607080910'H
},
ef-epdgidem {
    fileDescriptor : {
        efFileSize '14'H
    },
    fillFileContent :
'0102030405060708091001020304050607080910'H
},
ef-epdgselectionem {
    fileDescriptor : {
        efFileSize '12'H
    },
    fillFileContent :
'010203040506070809100102030405060708'H
},
ef-frompreferred {
},
ef-imsconfigdata { -- BER-TLV
    fileDescriptor : {
        efFileSize '11'H
    },
    fillFileContent : '8001018106665544332211'H
},
ef-3gpppsdataoff {
    fillFileContent : '01020304'H
},
ef-3gpppsdataoffservicelist {
    fileDescriptor : {
        fileDescriptor '4221000B'H,
        efFileSize '16'H
    },
    fillFileContent : '1102030405060708091011'H,
    fillFileContent : '2102030405060708091011'H
},
ef-xcapconfigdata { -- BER-TLV
    fileDescriptor : {
        efFileSize '15'H

```

```

    },
    fillFileContent :
'8010A00E810101820102A106810101840104'H
  },
  ef-earfcnlist {
    fileDescriptor : {
      efFileSize '08'H
    },
    fillFileContent : 'A006FFFFFFFFFFFF'H
  },
  ef-mudmidconfigdata { -- BER-TLV
    fileDescriptor : {
      efFileSize '14'H
    },
    fillFileContent : '8001008109010203040506070809'H
  }
}

```

#### 6.14.5.2.15. *PE-OPT-USIM-by-Template-8-v3*

It contains the new files added in v3 template.

##### PE-OPT-USIM(by-Template)-8-v3

```

optusimValue ProfileElement ::= opt-usim : {
  optusim-header {
    mandated NULL,
    identification 5215
  },
  templateID { 2 23 143 1 2 5 3},

  ef-li {
  },
  ef-acmax {
  },
  ef-acm {
  },
  ef-gid1 {
  },
  ef-gid2 {
  },
  ef-msisdn {
  },
  ef-puct {
  },
  ef-cbmi {
  },
  ef-cbmid {
  },
  ef-sdn {
  },
  ef-ext2 {
  },
  ef-ext3 {
  },
  ef-cbmir {
  },

```

```

ef-plmnwact {
},
ef-oplmnwact {
},
ef-hplmnwact {
},
ef-dck {
},
ef-cn1 {
},
ef-smsr {
},
ef-bdn {
},
ef-ext5 {
},
ef-ccp2 {
},
ef-ext4 {
},
ef-acl {
},
ef-cmi {
},
ef-ici {
},
ef-oci {
},
ef-ict {
},
ef-oct {
},
ef-vgcs {
    fillFileContent :
'0102030405060708091011121314151617181920'H
},
ef-vgcss {
    fillFileContent : '11121314151617'H
},
ef-vbs {
    fillFileContent :
'1112131415161718192001020304050607080910'H
},
ef-vbss {
    fillFileContent : '02030405060708'H
},
ef-emlpp {
    fillFileContent : '0405'H
},
ef-aaem {
},
ef-hiddenkey {
},
ef-pnn {
    fillFileContent : '11020304050607080910111213141511'H,
    fillFileContent : '12020304050607080910111213141512'H,
    fillFileContent : '13020304050607080910111213141513'H,
    fillFileContent : '14020304050607080910111213141514'H,
    fillFileContent : '15020304050607080910111213141515'H,

```

```

    fillFileContent : '16020304050607080910111213141516'H,
    fillFileContent : '17020304050607080910111213141517'H,
    fillFileContent : '18020304050607080910111213141518'H,
    fillFileContent : '19020304050607080910111213141519'H,
    fillFileContent : '20020304050607080910111213141520'H
  },
  ef-opl {
    fillFileContent : '2102030405060708'H,
    fillFileContent : '2202030405060708'H,
    fillFileContent : '2302030405060708'H,
    fillFileContent : '2402030405060708'H,
    fillFileContent : '2502030405060708'H
  },
  ef-mbdn {
    fillFileContent :
'010203040506070809101112131415161718192021222324'H,
    fillFileContent :
'020203040506070809101112131415161718192021222302'H,
    fillFileContent :
'030203040506070809101112131415161718192021222303'H
  },
  ef-ext6 {
  },
  ef-mbi {
    fillFileContent : '1102030411'H,
    fillFileContent : '2202030422'H,
    fillFileContent : '3302030433'H,
    fillFileContent : '4402030444'H,
    fillFileContent : '5502030455'H,
    fillFileContent : '6602030466'H,
    fillFileContent : '7702030477'H,
    fillFileContent : '8802030488'H,
    fillFileContent : '9902030499'H,
    fillFileContent : '0002030411'H
  },
  ef-mwis {
  },
  ef-cfis {
  },
  ef-ext7 {
  },
  ef-spdi {
    fileDescriptor : {
      efFileSize '07'H
    },
    fillFileContent : 'A3058003FFFFFF'H
  },
  ef-mmsn {
  },
  ef-ext8 {
  },
  ef-mmshcp {
  },
  ef-mmshup {
    fileDescriptor : {
      fileDescriptor '42210040'H,
      efFileSize '40'H
    }
  },
},

```

```
ef-mmsucp {
},
ef-nia {
},
ef-vgcscsca {
  fileDescriptor : {
    efFileSize '08'H
  }
},
ef-vbsca {
  fileDescriptor : {
    efFileSize '06'H
  }
},
-- ef-gbabp not included
-- ef-msk not included
-- ef-muk not included

ef-ehplmn {
},
-- ef-gbanl not included

ef-ehplmmpi {
},
ef-lrplmnsi {
},
-- ef-nafkca not included

ef-spni {
  fileDescriptor : {
    efFileSize '20'H
  }
},
ef-pnni {
  fileDescriptor : {
    fileDescriptor '42210030'H,
    efFileSize '30'H
  }
},
ef-ncp-ip {
  fileDescriptor : {
    fileDescriptor '42210010'H,
    efFileSize '10'H
  },
fillFileContent : '16020304050607080910111213141516'H
},
ef-ufc {
},
ef-nasconfig {
  fillFileContent :
'180203040506070809101112131415161718'H
},
ef-uicciari {
  fileDescriptor : {
    fileDescriptor '42210014'H,
    efFileSize '14'H
  },
  fillFileContent :
'2002030405060708091011121314151617181920'H
```

```

},
ef-pws {
  fileDescriptor : {
    efFileSize '0F'H
  },
fillFileContent : '150203040506070809101112131415'H
},
ef-fdnuri {
  fileDescriptor : {
    fileDescriptor '4221000E'H,
    efFileSize '0E'H
  }
},
ef-bdnuri {
  fileDescriptor : {
    fileDescriptor '4221000D'H,
    efFileSize '0D'H
  }
},
ef-sdnuri {
  fileDescriptor : {
    fileDescriptor '4221000C'H,
    efFileSize '0C'H
  }
},
ef-ial {
  fileDescriptor : {
    fileDescriptor '42210012'H,
    efFileSize '48'H
  },
fillFileContent :
'801001020304050607080910111213141516'H,
fillFileContent :
'811002020304050607080910111213141516'H,
fillFileContent :
'811003020304050607080910111213141516'H,
fillFileContent :
'801004020304050607080910111213141516'H
},
ef-ips {
  fileDescriptor : {
    efFileSize '08'H
  }
},
ef-ipd {
  fileDescriptor : {
    fileDescriptor '42210010'H,
    efFileSize '10'H
  }
},
ef-epdgid {
  fileDescriptor : {
    efFileSize '10'H
  },
fillFileContent : '01020304050607080910111213141516'H
},
ef-epdgselection {
  fileDescriptor : {
    efFileSize '0A'H

```

```

    },
    fillFileContent : '01020304050607080910'H
  },
  ef-epdgidem {
    fileDescriptor : {
      efFileSize '14'H
    },
    fillFileContent :
'0102030405060708091001020304050607080910'H
  },
  ef-epdgselectionem {
    fileDescriptor : {
      efFileSize '12'H
    },
    fillFileContent :
'010203040506070809100102030405060708'H
  },
  ef-frompreferred {
  },
  ef-imsconfigdata { -- BER-TLV
    fileDescriptor : {
      efFileSize '11'H
    },
    fillFileContent : '8001018106665544332211'H
  },
  ef-3gpppsdataoff {
    fillFileContent : '01020304'H
  },
  ef-3gpppsdataoffservicelist {
    fileDescriptor : {
      fileDescriptor '4221000B'H,
      efFileSize '16'H
    },
    fillFileContent : '1102030405060708091011'H,
    fillFileContent : '2102030405060708091011'H
  },
  ef-xcapconfigdata { -- BER-TLV
    fileDescriptor : {
      efFileSize '15'H
    },
    fillFileContent :
'8010A00E810101820102A106810101840104'H
  },
  ef-earfcnlist {
    fileDescriptor : {
      efFileSize '08'H
    },
    fillFileContent : 'A006FFFFFFFFFFFF'H
  },
  ef-mudmidconfigdata { -- BER-TLV
    fileDescriptor : {
      efFileSize '14'H
    },
    fillFileContent : '8001008109010203040506070809'H
  },
  ef-eaka {
    fillFileContent : 'FE'H
  }
}

```



#### 6.14.5.2.16. PE-OPT-USIM-by-Template-9-v2

The content is identical with PE-OPT-USIM(by-Template)-2-v2 except that the following files are not included: EF OPLMNwAcT, EF HPLMNwAcT, EF EHPLMN.

#### PE-OPT-USIM(by-Template)-9-v2

```

optusimValue ProfileElement ::= opt-usim : {
    optusim-header {
        mandated NULL,
        identification 5216
    },
    templateID { 2 23 143 1 2 5 2 },

    ef-li {
    },
    ef-acmax {
    },
    ef-acm {
    },
    ef-gid1 {
        fillFileContent : '0102030405060708'H
    },
    ef-gid2 {
        fillFileContent : '0203040506070809'H
    },
    ef-msisdn {
    },
    ef-puct {
    },
    ef-cbmi {
    },
    ef-cbmid {
    },
    ef-sdn {
    },
    ef-ext2 {
    },
    ef-ext3 {
    },
    ef-cbmir {
    },
    ef-plmnwact {
    },
    ef-dck {
    },
    ef-cn1 {
    },
    ef-smsr {
    },
    ef-bdn {
    },
    ef-ext5 {
    },
    ef-ccp2 {
    },
    ef-ext4 {
    },

```

```

ef-acl {
},
ef-cmi {
},
ef-ici {
},
ef-oci {
},
ef-ict {
},
ef-oct {
},
ef-vgcs {
    fillFileContent :
'0102030405060708091011121314151617181920'H
},
ef-vgcsc {
    fillFileContent : '11121314151617'H
},
ef-vbs {
    fillFileContent :
'1112131415161718192001020304050607080910'H
},
ef-vbss {
    fillFileContent : '02030405060708'H
},
ef-emlpp {
    fillFileContent : '0405'H
},
ef-aaem {
},
ef-hiddenkey {
},
ef-pnn {
    fillFileContent : '11020304050607080910111213141511'H,
    fillFileContent : '12020304050607080910111213141512'H,
    fillFileContent : '13020304050607080910111213141513'H,
    fillFileContent : '14020304050607080910111213141514'H,
    fillFileContent : '15020304050607080910111213141515'H,
    fillFileContent : '16020304050607080910111213141516'H,
    fillFileContent : '17020304050607080910111213141517'H,
    fillFileContent : '18020304050607080910111213141518'H,
    fillFileContent : '19020304050607080910111213141519'H,
    fillFileContent : '20020304050607080910111213141520'H
},
ef-opl {
    fillFileContent : '2102030405060708'H,
    fillFileContent : '2202030405060708'H,
    fillFileContent : '2302030405060708'H,
    fillFileContent : '2402030405060708'H,
    fillFileContent : '2502030405060708'H
},
ef-mbdn {
    fillFileContent :
'010203040506070809101112131415161718192021222324'H,
    fillFileContent :
'020203040506070809101112131415161718192021222302'H,
    fillFileContent :
'030203040506070809101112131415161718192021222303'H

```

```
    },
    ef-ext6 {
    },
    ef-mpi {
        fillFileContent : '1102030411'H,
        fillFileContent : '2202030422'H,
        fillFileContent : '3302030433'H,
        fillFileContent : '4402030444'H,
        fillFileContent : '5502030455'H,
        fillFileContent : '6602030466'H,
        fillFileContent : '7702030477'H,
        fillFileContent : '8802030488'H,
        fillFileContent : '9902030499'H,
        fillFileContent : '0002030411'H
    },
    ef-mwis {
    },
    ef-cfis {
    },
    ef-ext7 {
    },
    ef-spdi {
        fileDescriptor : {
            efFileSize '07'H
        },
        fillFileContent : 'A3058003FFFFFF'H
    },

    ef-mmsn {
    },
    ef-ext8 {
    },
    ef-mmshcp {
    },
    ef-mmshup {
        fileDescriptor : {
            fileDescriptor '42210040'H,
            efFileSize '40'H
        }
    },
    ef-mmshucp {
    },
    ef-nia {
    },
    ef-vgcsca {
        fileDescriptor : {
            efFileSize '08'H
        }
    },
    ef-vbsca {
        fileDescriptor : {
            efFileSize '06'H
        }
    },
    -- ef-gbap not included
    -- ef-msk not included
    -- ef-muk not included
    -- ef-gbanl not included
```

```
ef-ehplmmpi {
},
ef-lrplmnsi {
},
-- ef-nafkca not included

ef-spni {
  fileDescriptor : {
    efFileSize '20'H
  }
},
ef-pnni {
  fileDescriptor : {
    fileDescriptor '42210030'H,
    efFileSize '30'H
  }
},
ef-ncp-ip {
  fileDescriptor : {
    fileDescriptor '42210010'H,
    efFileSize '10'H
  },
  fillFileContent : '16020304050607080910111213141516'H
},
ef-ufc {
},
ef-nasconfig {
  fillFileContent :
'180203040506070809101112131415161718'H
},
ef-uicciari {
  fileDescriptor : {
    fileDescriptor '42210014'H,
    efFileSize '14'H
  },
  fillFileContent :
'2002030405060708091011121314151617181920'H
},
ef-pws {
  fileDescriptor : {
    efFileSize '0F'H
  },
  fillFileContent : '150203040506070809101112131415'H
},
ef-fdnuri {
  fileDescriptor : {
    fileDescriptor '4221000E'H,
    efFileSize '0E'H
  }
},
ef-bdnuri {
  fileDescriptor : {
    fileDescriptor '4221000D'H,
    efFileSize '0D'H
  }
},
ef-sdnuri {
  fileDescriptor : {
    fileDescriptor '4221000C'H,
```

```

        efFileSize '0C'H
    }
},
ef-ial {
    fileDescriptor : {
        fileDescriptor '42210012'H,
        securityAttributesReferenced '04'H,
        efFileSize '48'H
    },

    fillFileContent :
'801001020304050607080910111213141516'H,
    fillFileContent :
'811002020304050607080910111213141516'H,
    fillFileContent :
'811003020304050607080910111213141516'H,
    fillFileContent :
'801004020304050607080910111213141516'H
},
ef-ips {
    fileDescriptor : {
        efFileSize '08'H
    }
},
ef-ipd {
    fileDescriptor : {
        fileDescriptor '42210010'H,
        securityAttributesReferenced '04'H,
        efFileSize '10'H
    }
}
}

```

### 6.14.5.3. DF-GSM\_ACCESS

#### 6.14.5.3.1. *PE-GSM-ACCESS-by-Template-1*

#### **PE-GSM-ACCESS-by-Template-1**

```

gsmAccessValue ProfileElement ::= gsm-access : {
    gsm-access-header {
        mandated NULL,
        identification 531
    },
    templateID { 2 23 143 1 2 7 },
    df-gsm-access {
        fileDescriptor : {
            pinStatusTemplatedO '01810A'H
        }
    },
    ef-kc {
    },
    ef-kcgprs {
    },
    ef-cpbcch {
    },
}

```

```

ef-invscan {
}

```

#### 6.14.5.3.2. *PE-GSM-ACCESS-by-Template-2*

The content is identical with 6.14.5.3.1 PE-GSM-ACCESS-by-Template-1 except that this PE is not mandated and the template ID is different.

#### PE-GSM-ACCESS-by-Template-2

```

gsmAccessValue ProfileElement ::= gsm-access : {
  gsm-access-header {
    identification 532
  },
  templateID { 2 23 143 1 2 7 100 },
  df-gsm-access {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-kc {
  },
  ef-kcgprs {
  },
  ef-cpbcch {
  },
  ef-invscan {
  }
}

```

#### 6.14.5.4. DF-Phonebook

##### 6.14.5.4.1. *PE-Phonebook-by-Template-1*

#### PE-Phonebook-by-Template-1

```

phonebookValue ProfileElement ::= phonebook : {
  phonebook-header {
    mandated NULL,
    identification 541
  },
  templateID { 2 23 143 1 2 6 },
  df-phonebook {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-pbr {
    fileDescriptor : {
      -- 3 records of 16 bytes
      fileDescriptor '42210010'H,
      efFileSize '30'H
    },
    fillFileContent : 'A808C0024F58c6024F90AA04C2024F38'H
  },
  ef-ext1 {

```

```
fileDescriptor : {
-- 2 records of 13 bytes
-- Record size 0x0D defined in template
-- fileDescriptor '4221000D'H,
  efFileSize '1A'H,
  shortEFID '08'H
}
},
ef-aas {
  fileDescriptor : {
    -- 1 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '10'H
  }
},
ef-gas {
  fileDescriptor : {
    -- 2 records of 8 bytes
    fileDescriptor '42210008'H,
    efFileSize '10'H
  }
},
ef-psc {
  fileDescriptor : {
    shortEFID '10'H
  }
},
ef-cc {
  fileDescriptor : {
    shortEFID '18'H
  }
},
ef-puid {
  fileDescriptor : {
    shortEFID '20'H
  }
},
ef-iap {
  fileDescriptor : {
    -- 2 records of 5 bytes
    fileDescriptor '42210005'H,
    efFileSize '0A'H,
    shortEFID '28'H
  }
},
ef-adn {
  fileDescriptor : {
    -- 2 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '20'H,
    shortEFID '30'H
  }
},
ef-pbc {
  fileDescriptor : {
    efFileSize '10'H,
    shortEFID '38'H
  }
},
```

```
ef-anr {
  fileDescriptor : {
    -- 1 record of 20 bytes
    fileDescriptor '42210014'H,
    efFileSize '14'H,
    shortEFID '40'H
  }
},
ef-puri {
  fileDescriptor : {
    -- 2 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '20'H,
    shortEFID '48'H
  },
  fillFileContent : '80000102030405060708090A0B0C0D0F'H,
  fillFileContent : '80000102030405060708090A0B0C0D0F'H
},
ef-email {
  fileDescriptor : {
    -- 2 records of 20 bytes
    fileDescriptor '42210014'H,
    efFileSize '28'H,
    shortEFID '50'H
  }
},
ef-sne {
  fileDescriptor : {
    -- 1 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '10'H,
    shortEFID '58'H
  }
},
ef-uid {
  fileDescriptor : {
    -- 8 records of 2 bytes
    efFileSize '10'H,
    shortEFID '60'H
  }
},
ef-grp {
  fileDescriptor : {
    -- 2 records of 16 bytes
    fileDescriptor '42210010'H,
    efFileSize '20'H,
    shortEFID '68'H
  }
},
ef-ccpl {
  fileDescriptor : {
    -- 4 records of 8 bytes
    fileDescriptor '42210008'H,
    efFileSize '20'H,
    shortEFID '70'H
  }
}
}
```



### 6.14.5.5. DF-5GS

#### 6.14.5.5.1. *PE-5GS-by-Template-1*

#### PE-5GS-by-Template-1

```
df5GSValue ProfileElement ::= df-5gs : {
  df-5gs-header {
    mandated NULL,
    identification 551
  },
  templateID {2 23 143 1 2 13},
  df-df-5gs {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-5gs3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
  },
  ef-5gsn3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
  },
  ef-5gs3gppnsc {
  },
  ef-5gsn3gppnsc {
  },
  ef-5gauthkeys {
  },
  ef-uac-aic {
    fillFileContent : 'FFFFFFFF'H
  },
  ef-opl5g {
    fileDescriptor : {
      efFileSize '32'H -- 50 bytes
    }
  },
  ef-nsi {
    fileDescriptor : {
      efFileSize '14'H -- 20 bytes
    },
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF'H
  },
  ef-routing-indicator {
  }
}
```

#### 6.14.5.5.2. *PE-5GS-by-Template-1-v2*

The content is identical to 6.14.5.5.1 PE-5GS-by-Template-1, except:

- the value of `identification` field which equals 552
- the value of `templateID` field which equals {2 23 143 1 2 13 2}
- the file name `ef-nsi` is changed to `ef-supinai`

## 6.14.5.5.3.

## PE-5GS-by-Template-2-v2

It contains new files added in v2 template.

### PE-5GS-by-Template-2\_v2

```
df5GSValue ProfileElement ::= df-5gs : {
  df-5gs-header {
    mandated NULL,
    identification 553
  },
  templateID {2 23 143 1 2 13 2},
  df-df-5gs {
    fileDescriptor : {
      pinStatusTemplatedO '01810A'H
    }
  },
  ef-5gs3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
  },
  ef-5gsn3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
  },
  ef-5gs3gppnsc {
  },
  ef-5gsn3gppnsc {
  },
  ef-5gauthkeys {
  },
  ef-uac-aic {
    fillFileContent : 'FFFFFFFF'H
  },
  ef-opl5g {
    fileDescriptor : {
      efFileSize '32'H -- 50 bytes
    }
  },
  ef-supinai {
    fileDescriptor : {
      efFileSize '14'H -- 20 bytes
    },
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF'H
  },
  ef-routing-indicator {
  },
  ef-ursp { -- BER-TLV
    fileDescriptor : {
      efFileSize '0400'H,
      proprietaryEFInfo {
        specialFileInformation '40'H,
        maximumFileSize '0800'H,
        fileDetails '01'H
      }
    }
  },
}
```

```

    fillFileContent :
'802400F110201F000910C0A80100FFFFFF00131200100203220103040
90467736D6103636F6D'H
    },
    ef-tn3gppsn{
    }
}

```

#### 6.14.5.5.4.

#### PE-5GS-by-Template-3-v2

#### PE-5GS-by-Template-3-v2

```

df5GSValue ProfileElement ::= df-5gs : {
    df-5gs-header {
        mandated NULL,
        identification 554
    },
    templateID {2 23 143 1 2 13 2},
    df-df-5gs {
        fileDescriptor : {
            pinStatusTemplateDO '01810A'H
        }
    },
    ef-5gs3gpploci {
        fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
    },
    ef-5gsn3gpploci {
        fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
    },
    ef-5gs3gppnsc {
    },
    ef-5gsn3gppnsc {
    },
    ef-5gauthkeys {
    },
    ef-uac-aic {
        fillFileContent : 'FFFFFFF'H
    },
    ef-opl5g {
        fileDescriptor : {
            efFileSize '32'H -- 50 bytes
        }
    },
    ef-supinai {
        fileDescriptor : {
            efFileSize '14'H -- 20 bytes
        },
        fillFileContent :
'8012757365723137406578616D706C652E636F6D'H
    },
    ef-routing-indicator {
    }
}

```

#### 6.14.5.5.5. *PE-5GS-by-Template-1-v3*

The content is identical to 6.14.5.5.1 PE-5GS-by-Template-1, except:

- the value of `identification` field which equals 555
- the value of `templateID` field which equals {2 23 143 1 2 13 3}
- the file name `ef-nsi` is changed to `ef-supinai`

#### 6.14.5.5.6. *PE-5GS-by-Template-3-v3*

The content is identical to 6.14.5.5.4 PE-5GS-by-Template-3-v2, except:

- the value of `identification` field which equals 556
- the value of `templateID` field which equals to {2 23 143 1 2 13 3}

#### 6.14.5.5.7. *PE-5GS-by-Template-4-v4*

It contains new files added in v4 template.

#### PE-5GS-by-Template-4-v4

```
df5GSValue ProfileElement ::= df-5gs : {
  df-5gs-header {
    mandated NULL,
    identification 557
  },
  templateID {2 23 143 1 2 13 4},
  df-df-5gs {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-5gs3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
  },
  ef-5gsn3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
  },
  ef-5gs3gppnsc {
  },
  ef-5gsn3gppnsc {
  },
  ef-5gauthkeys {
  },
  ef-uac-aic {
    fillFileContent : 'FFFFFFFF'H
  },
  ef-opl5g {
    fileDescriptor : {
      efFileSize '32'H -- 50 bytes
    }
  },
  ef-supinai {
    fileDescriptor : {
      efFileSize '14'H -- 20 bytes
    },
  },
}
```

```
fillFileContent :  
'FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF'H  
},  
ef-routing-indicator {  
},  
ef-ursp { -- BER-TLV  
    fileDescriptor : {  
        efFileSize '0400'H,  
        proprietaryEFInfo {  
            specialFileInformation '40'H,  
            maximumFileSize '0800'H,  
            fileDetails '01'H  
        }  
    },  
    fillFileContent :  
'802400F110201F000910C0A80100FFFFFF00131200100203220103040  
90467736D6103636F6D'H  
},  
ef-tn3gppsn {  
},  
ef-cag {  
    fillFileContent : 'FFFF'H  
},  
ef-sor-cmci {  
    fileDescriptor : {  
        efFileSize '14'H -- 20 bytes  
    },  
    fillFileContent :  
'FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF'H  
},  
ef-dri {  
    fillFileContent : 'FFFFFFFFFFFFFFF'H  
},  
ef-5gsedrx {  
    fillFileContent : 'FFFF'H  
},  
ef-5gnswo-conf {  
    fillFileContent : '00'H  
},  
ef-mchpplmn {  
    fillFileContent : 'FF'H  
},  
ef-kausf-derivation {  
    fillFileContent : 'FF'H  
}  
}
```

### 6.14.5.6. DF-SAIP

#### 6.14.5.6.1. *PE-SAIP-by-Template-1*

In this PE the ef-suci-calc-info-usim contains reference to Profile A protection scheme.

Home Network Private Key	ECC private key: 'c53c22208b61860b06c62e5406a7b330c2b577aa5558981510d128247d38bd1d'
Home Network Public Key	ECC public key: '5a8d38864820197c3394b92613b20b91633cbd897119273bf8e4a6f4eec0a650'

#### PE-SAIP-by-Template-1

```
dfSAIPValue ProfileElement ::= df-saip : {
  df-saip-header {
    mandated NULL,
    identification 561
  },
  templateID {2 23 143 1 2 14},
  df-df-saip {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-suci-calc-info-usim {
    fileDescriptor : {
      efFileSize '2B'H -- 43 bytes
    },
    fillFileContent :
    'A0020101A12580010181205A8D38864820197C3394B92613B20B91633
    CBD897119273BF8E4A6F4EEC0A650'H
  }
}
```

#### 6.14.5.6.2. *PE-SAIP-by-Template-2*

In this PE the ef-suci-calc-info-usim contains reference to Profile B protection scheme.

Home Network Private Key	ECC private key: 'F1AB1074477EBCC7F554EA1C5FC368B1616730155E0041AC447D6301975FECDA'
Home Network Public Key	ECC public key: '0472DA71976234CE833A6907425867B82E074D44EF907DFB4B3E21C1C2256EBCD15 A7DED52FCBB097A4ED250E036C7B9C8C7004C4EEDC4F068CD7BF8D3F900E3B4'

### PE-SAIP-by-Template-2

```
dfSAIPValue ProfileElement ::= df-saip : {
  df-saip-header {
    mandated NULL,
    identification 562
  },
  templateID {2 23 143 1 2 14},
  df-df-saip {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-suci-calc-info-usim {
    fileDescriptor : {
      efFileSize '4C'H -- 76 bytes
    },
    fillFileContent :
'A0020201A14680010181410472DA71976234CE833A6907425867B82E0
74D44EF907DFB4B3E21C1C2256EBCD15A7DED52FCBB097A4ED250E036C
7B9C8C7004C4EEDC4F068CD7BF8D3F900E3B4 'H
  }
}
```

#### 6.14.5.6.3. PE-SAIP-by-Template-3

In this PE the ef-suci-calc-info-usim contains reference to null protection scheme.

### PE-SAIP-by-Template-3

```
dfSAIPValue ProfileElement ::= df-saip : {
  df-saip-header {
    mandated NULL,
    identification 563
  },
  templateID {2 23 143 1 2 14},
  df-df-saip {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-suci-calc-info-usim {
    fileDescriptor : {
      efFileSize '04'H -- 4 bytes
    },
    fillFileContent : 'A0020000'H
  }
}
```

#### 6.14.5.6.4. PE-SAIP-by-Template-4

In this PE the ef-suci-calc-info-usim contains two Protection Scheme inserted in the Protection Scheme Identifier List data object tag. The scheme at the first position (highest priority) is '01 03', that means Profile A with non-existing key 3.

##### PE-SAIP-by-Template-4

```
dfSAIPValue ProfileElement ::= df-saip : {
  df-saip-header {
    mandated NULL,
    identification 564
  },
  templateID {2 23 143 1 2 14},
  df-df-saip {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-suci-calc-info-usim {
    fileDescriptor : {
      efFileSize '2D'H -- 45 bytes
    },
    fillFileContent :
'A00401030201A12580010181205A8D38864820197C3394B92613B20B9
1633CBD897119273BF8E4A6F4EEC0A650'H
  }
}
```

#### 6.14.5.6.5. PE-SAIP-by-Template-5

In this PE the ef-suci-calc-info-usim contains two Protection Schemes inserted in the Protection Scheme Identifier List data object tag. The scheme at the first position (highest priority) is '02 03', that means Profile B with non-existing key 3.

##### PE-SAIP-by-Template-5

```
dfSAIPValue ProfileElement ::= df-saip : {
  df-saip-header {
    mandated NULL,
    identification 565
  },
  templateID {2 23 143 1 2 14},
  df-df-saip {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-suci-calc-info-usim {
    fileDescriptor : {
      efFileSize '4E'H -- 78 bytes
    },
    fillFileContent :
'A00402030101A14680010181410472DA71976234CE833A6907425867B
82E074D44EF907DFB4B3E21C1C2256EBCD15A7DED52FCBB097A4ED250E
036C7B9C8C7004C4EEDC4F068CD7BF8D3F900E3B4'H
  }
}
```



DF-SNPN

PE-SNPN-by-Template-1

## PE-SNPN-by-Template-1

```
dfSNPNValue ProfileElement ::= df-snpn : {
  df-snpn-header {
    mandated NULL,
    identification 571
  },
  templateID {2 23 143 1 2 15},
  df-df-snpn {
    fileDescriptor : {
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-pws-snpn {
    fillFileContent : '00'H
  }
}
```

DF-5G-PROSE

## PE-5G-PROSE-by-Template-1

## PE-5G-PROSE-by-Template-1

```
df5GPROSEValue ProfileElement ::= df-5gprose : {  
    df-5g-prose-header {  
        mandated NULL,  
        identification 581  
    },  
    templateID {2 23 143 1 2 16},  
    df-df-5g-prose {  
        fileDescriptor : {  
            pinStatusTemplateDO '01810A'H  
        }  
    },  
    ef-5g-prose-st {  
        fillFileContent : '1F'H  
    },  
    ef-5g-prose-dd {  
        fillFileContent : '  
FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFH'  
    },  
    ef-5g-prose-dc {  
        fillFileContent : ' FFFFFFFFFFFFFFFFFFFFFFFFH'  
    },  
    ef-5g-prose-u2nru {  
        fillFileContent : '  
FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFH'  
FFFFFFFFH'  
    },  
    ef-5g-prose-ru {
```

```

    fillFileContent : '
FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
'H
  },
  ef-5g-prose-uir {
    fillFileContent : '
FFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFFF
FFFFFF'H
  }
}

```

## 6.14.6 ISIM ADF

### 6.14.6.1. ISIM

#### 6.14.6.1.1. *PE-ISIM-by-Template-1*

#### PE-ISIM-by-Template-1

```

isimValue ProfileElement ::= isim : {
  isim-header {
    mandated NULL,
    identification 611
  },

  templateID { 2 23 143 1 2 8 },
  adf-isim {
    fileDescriptor : {
      fileID '7FF2'H,
      dfName 'A0000000871004FF33FF018900000100'H,
      pinStatusTemplateDO '010A'H
    }
  },

  ef-impi {
    fileDescriptor : {
      fileDescriptor '4121'H,
      efFileSize '1F'H
    },
    -- 001010123456789@test.3gpp.com
    fillFileContent :
'801D30303130313031323334353637383940746573742E336770702E6
36F6D'H
  },

  ef-impu {
    fileDescriptor : {
      -- 1 record of 24 bytes
      fileDescriptor '42210018'H,
      efFileSize '18'H
    },
    -- sip:user@test.3gpp.com

    fillFileContent :
'80167369703A7573657240746573742E336770702E636F6D'H
  },

  ef-domain {

```

```

fileDescriptor : {
  fileDescriptor '4121'H,
  efFileSize '0F'H
},
-- sip:user@test.3gpp.com

fillFileContent : '800D746573742E336770702E636F6D'H
},

ef-ist {
  fileDescriptor : {
    fileDescriptor '4121'H,
    efFileSize '03'H
  },
  fillFileContent : 'F10000'H
},

ef-ad {
},

ef-arr {
  fileDescriptor : {
    linkPath '2F06'H
  }
}
}

```

#### 6.14.6.1.2. PE-ISIM-by-Template-2

The content is identical to 6.14.6.1.1 PE-ISIM-by-Template-1, except:

- the value of `identification` field which equals 612
- the content of EFIST which is defined below:

```

ef-ist {
  fillFileContent : 'F1001F'H
}

```

#### 6.14.6.1.3. PE-ISIM-by-Template-3

The content is identical to 6.14.6.1.1 PE-ISIM-by-Template-1, except:

- the value of `identification` field which equals 613
- Services made available under ISIM Service Table as –
  - Service N°2 (Generic Bootstrapping Architecture (GBA)),
  - Service N°10 (Support of UICC access to IMS).

#### PE-ISIM-by-Template-3

```

isimValue ProfileElement ::= isim : {
  isim-header {
    mandated NULL,
    identification 613
  },

  templateID { 2 23 143 1 2 8 },
  adf-isim {
    fileDescriptor : {

```

```

        fileID '7FF2'H,
        dfName 'A0000000871004FF33FF018900000100'H,
        pinStatusTemplateDO '010A'H
    }
},

ef-impI {
    fileDescriptor : {
        fileDescriptor '4121'H,
        efFileSize '1F'H
    },
    -- 001010123456789@test.3gpp.com
    fillFileContent :
'801D30303130313031323334353637383940746573742E336770702E6
36F6D'H
    },

ef-impU {
    fileDescriptor : {
        -- 1 record of 24 bytes
        fileDescriptor '42210018'H,
        efFileSize '18'H
    },
    -- sip:user@test.3gpp.com

    fillFileContent :
'80167369703A7573657240746573742E336770702E636F6D'H
    },

ef-domain {
    fileDescriptor : {
        fileDescriptor '4121'H,
        efFileSize '0F'H
    },
    -- sip:user@test.3gpp.com

    fillFileContent : '800D746573742E336770702E636F6D'H
},

ef-ist {
    fileDescriptor : {
        fileDescriptor '4121'H,
        efFileSize '03'H
    },
    fillFileContent : 'F30200'H
},

ef-ad {
},

ef-arr {
    fileDescriptor : {
        linkPath '2F06'H
    }
}
}

```

#### 6.14.6.1.4. *PE-ISIM-by-Template-4*

The content is identical to 6.14.6.1.3 PE-ISIM-by-Template-3, except:

- the value of `identification` field which equals 614
- the content of EFIST with below additional services :
  - Service N°17 (From Preferred),
  - Service N°18 (IMS configuration data),
  - Service N°19 (XCAP Configuration Data),
  - Service N°20 (WebRTC URI), and
  - Service N°21 (MuD and MiD configuration data).

```
ef-ist {
  fillFileContent : 'F3021F'H
```

#### 6.14.6.2. OPT-ISIM

##### 6.14.6.2.1. *PE-OPT-ISIM-by-Template-1*

#### PE-OPT-ISIM-by-Template-1

```
optIsimValue ProfileElement ::= opt-isim : {
  optisim-header {
    mandated NULL,
    identification 621
  },

  templateID { 2 23 143 1 2 9 },

  ef-pcscf {
    fileDescriptor : {
      -- 1 record of 30 bytes
      fileDescriptor '4221001E'H,
      efFileSize '1E'H
    },
    -- Type '00' = FQDN: pcscf1.anyims.test.3gpp.com

    fillFileContent :
    '801C007063736366312E616E79696D732E746573742E336770702E636
    F6D'H
  },

  ef-sms {
  },
  ef-smsp {
  },
  ef-smss {
  },
  ef-smsr {
  }
}
```

##### 6.14.6.2.2 *PE-OPT-ISIM-by-Template-1-v2*

The content is identical to 6.14.6.2.1 PE-OPT-ISIM-by-Template-1, except:

- the value of `identification` field which equals 622
- the value of `templateID` field which equals { 2 23 143 1 2 9 2 }

## 6.14.6.2.3

## PE-OPT-ISIM-by-Template-2-v2

## PE-OPT-ISIM-by-Template-2-v2

```

optIsimValue ProfileElement ::= opt-isim : {
    optisim-header {
        mandated NULL,
        identification 623
    },

    templateID { 2 23 143 1 2 9 2 },

    ef-frompreferred {
    } ,
    ef-imsconfigdata {
        fileDescriptor : {
            efFileSize '06'H
        },
        -- IMS configuration data encoding as 800100
        -- IMS configuration data not present

        fillFileContent : '800100'H
    } ,
    ef-xcapconfigdata {
        fileDescriptor : {
            efFileSize '15'H
        },
        -- XCAP_conn_params_policy data object as 8010
        -- XCAP_conn_params_policy TLV TAG as A00E
        -- AccessForXCAP Tag as 810100
        -- Number of XCAP connection parameters policy part TLV's Tag as 820100
        -- XCAP connection parameters policy part TLV as A106
        -- Access Tag TLV as 810100
        -- URI Tag TLV as 810100

        fillFileContent : '8010A00E810100820100A106810100840100'H
    } ,
    ef-webrtcuri {
        fileDescriptor : {
            -- 1 record of 03 bytes
            fileDescriptor '42210003'H,
            efFileSize '03'H
        },
        -- URI TLV data object as 800100

        fillFileContent : '800100'H
    } ,
    ef-mudmidconfigdata {
        fileDescriptor : {
            efFileSize '06'H
        },
        -- MuD_and_MiD_configuration_data encoding as 800100
        -- MuD_and_MiD_configuration_data not present

        fillFileContent : '800100'H
    }
}

```

### 6.14.6.2.4 PE-OPT-ISIM-by-Template-3

The content is identical to 6.14.6.2.1 PE-OPT-ISIM-by-Template-1, except:

- the value of `identification` field which equals 624
- EF GBABP, EF GBANL, EF UICCIARI are created

#### PE-OPT-ISIM-by-Template-3

```
optIsimValue ProfileElement ::= opt-isim : {
    optisim-header {
        mandated NULL,
        identification 624
    },

    templateID { 2 23 143 1 2 9 },

    ef-pcscf {
        fileDescriptor : {
            -- 1 record of 30 bytes
            fileDescriptor '4221001E'H,
            efFileSize '1E'H
        },
        -- Type '00' = FQDN: pcscf1.anyims.test.3gpp.com

        fillFileContent :
        '801C007063736366312E616E79696D732E746573742E336770702E636
        F6D'H
    },

    ef-sms {
    },
    ef-smssp {
    },
    ef-smss {
    },
    ef-smsr {
    },
    ef-gbabp {
        fileDescriptor : {
            fileDescriptor '4121'H,
            efFileSize '1E'H
        }
    },
    ef-gbanl {
        fileDescriptor : {
            -- 1 record of 30 bytes
            fileDescriptor '4221001E'H,
            efFileSize '1E'H
        }
    },
    ef-uicciari {
        fileDescriptor : {
            -- 1 record of 30 bytes
            fileDescriptor '4221001E'H,
            efFileSize '1E'H
        },
        fillFileContent
        '801C0102030405060708090A0B0C0D0E0F101112131415161718191A1
        B1C'H
    }
}
```

```

}
}

```

#### 6.14.6.2.5 PE-OPT-ISIM-by-Template-3-v2

The content is identical to 6.14.6.2.4 PE-OPT-ISIM-by-Template-3, except:

- the value of `identification` field which equals 625
- the value of `templateID` field which equals {2 23 143 1 2 9 2}
- `EFFromPreferred`, `EFIMSConfigData`, `EFXCAPConfigData`, `EFWebRTCURI` and `EFMuDMiDConfigData` are created.

#### PE-OPT-ISIM-by-Template-3-v2

```

optIsimValue ProfileElement ::= opt-isim : {
  optIsim-header {
    mandated NULL,
    identification 625
  },

  templateID { 2 23 143 1 2 9 2 },

  ef-pcscf {
    fileDescriptor : {
      -- 1 record of 30 bytes
      fileDescriptor '4221001E'H,
      efFileSize '1E'H
    },
    -- Type '00' = FQDN: pcscf1.anyims.test.3gpp.com

    fillFileContent :
    '801C007063736366312E616E79696D732E746573742E336770702E636
    F6D'H
  },

  ef-sms {
  },
  ef-smsp {
  },
  ef-smss {
  },
  ef-smsr {
  },
  ef-gbabp {
    fileDescriptor : {
      fileDescriptor '4121'H,
      efFileSize '1E'H
    }
  },
  ef-gbanl {
    fileDescriptor : {
      -- 1 record of 30 bytes
      fileDescriptor '4221001E'H,
      efFileSize '1E'H
    }
  },
  ef-uicciari {
    fileDescriptor : {
      -- 1 record of 30 bytes

```



```

        fileDescriptor '4221001E'H,
        efFileSize '1E'H
    },
    fillFileContent
'801C0102030405060708090A0B0C0D0E0F101112131415161718191A1
B1C'H
    },
ef-frompreferred {
    } ,
ef-imsconfigdata {
    fileDescriptor : {
        efFileSize '06'H
    },
    -- IMS configuration data encoding as 800100
    -- IMS configuration data not present

    fillFileContent : '800100'H
} ,
ef-xcapconfigdata {
    fileDescriptor : {
        efFileSize '15'H
    },
    -- XCAP_conn_params_policy data object as 8010
    -- XCAP_conn_params_policy TLV TAG as A00E
    -- AccessForXCAP Tag as 810100
    -- Number of XCAP connection parameters policy
part TLV's Tag as 820100
    -- XCAP connection parameters policy part TLV as
A106
    -- Access Tag TLV as 810100
    -- URI Tag TLV as 810100

    fillFileContent :
'8010A00E810100820100A106810100840100'H
    } ,
ef-webrtcuri {
    fileDescriptor : {
        -- 1 record of 03 bytes
        fileDescriptor '42210003'H,
        efFileSize '03'H
    },
    -- URI TLV data object as 800100

    fillFileContent : '800100'H
} ,
ef-mudmidconfigdata {
    fileDescriptor : {
        efFileSize '06'H
    },
    -- MuD_and_MiD_configuration_data encoding as
800100
    -- MuD_and_MiD_configuration_data not present

    fillFileContent : '800100'H
    }
}

```

## 6.14.7 CSIM ADF

### 6.14.7.1. CSIM

#### 6.14.7.1.1. *PE-CSIM-by-Template-1*

#### PE-CSIM-by-Template-1

```
csimValue ProfileElement ::= csim : {
  csim-header {
    mandated NULL,
    identification 711
  },
  templateID { 2 23 143 1 2 10},
  adf-csim {
    fileDescriptor : {
      fileID '7F88'H,
      dfName 'A0000003431002FF33FF018900000100'H,
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-call-count {},
  ef-imsi-m {},
  ef-imsi-t {},
  ef-tmsi {},
  ef-ah {},
  ef-aop {
    -- Analog Operational Parameters 1 byte
    fillFileContent : '01'H
  },
  ef-alloc {
    -- Analog Location and Registration Indicators 7
    bytes
    fillFileContent : '01020304050607'H
  },
  ef-cdmahome {
    -- CDMAHome size
    fileDescriptor : {
      efFileSize '05'H
    }
  },
  ef-znregi {
    -- ef-znregi size
    fileDescriptor : {
      efFileSize '08'H
    }
  },
  ef-snregi {
    -- CDMA System-Network Registration Indicators 7
    bytes
    fillFileContent : '01020304050607'H
  },
  ef-distregi {},
  ef-accolc {
    -- Access Overload Class ACCOLCp 1 byte
    fillFileContent : '01'H
  },
  ef-term {
    -- Call Termination Mode Preferences 1 byte
    fillFileContent : '01'H
  }
}
```

```

    },
ef-acp {
    -- Analog Channel Preferences  7 bytes
    fillFileContent : '01020304050607'H
},
ef-prl {
    -- Preferred Roaming List MAX_PR_LIST_SIZE
    fileDescriptor : {
        efFileSize '0C'H
    },
    fillFileContent : '0102030405060708090A0B0C'H
},
ef-ruimid {
    -- UIM_ID  8 bytes
    fileDescriptor : {
        efFileSize '08'H
    },
    fillFileContent : '0102030405060708'H
},
ef-csim-st {
    -- CSIM Service Table  X bytes, X>=1  (SAIP 6 bytes)
    fillFileContent : '000C00000000'H
},
ef-spc {},
ef-otapaspc {},

ef-namlock {
    -- namlock  1 byte
    fillFileContent : '01'H
},
ef-ota {
    -- OTASP/OTAPA Features  File size: 2N + 1 bytes
(SAIP 17 bytes)
    fillFileContent :
'0102030405060708090A0B0C0D0E0F1011'H
},
ef-sp {
    -- Service Preferences  1 byte
    fillFileContent : '01'H
},
ef-esn-meid-me {},
ef-li {},

ef-usgind {
    -- UIM_ID/SF_EUIMID Usage Indicator 1 byte
    fillFileContent : '01'H
},
ef-ad {},

ef-max-prl {
    -- Maximum PRL  2 or 4 bytes  (SAIP 4 bytes)
    fillFileContent : '01020304'H
},
    ef-spcs {
    -- SPC Status  1 byte
    fillFileContent : '00'H
},
ef-mecrp {},

ef-home-tag {
    -- Home System Tag  X bytes
    fileDescriptor : {
        efFileSize '04'H
    },
    fillFileContent : '01020304'H
}

```

```

},
  ef-group-tag {
    -- Group Tag List  GROUP_TAG_LIST_SIZE  bytes
      fileDescriptor : {
        efFileSize '04'H
      },
    fillFileContent : '01020304'H
  },
  ef-specific-tag {
    -- Specific Tag List  SPEC_TAG_LIST_SIZE  bytes
      fileDescriptor : {
        efFileSize '04'H
      },
    fillFileContent : '01020304'H
  },
  ef-call-prompt {
    -- Call Prompt List  CALL_PRMPPT_LIST_SIZE  bytes
      fileDescriptor : {
        efFileSize '04'H
      },

    fillFileContent : '01020304'H
  }
}

```

#### 6.14.7.1.2. PE-CSIM-by-Template-2

The content is identical to PE-OPT-USIM-by-Template-21 as defined in 6.14.7.1.1, except the content of EF-CSIM-ST which also contains services N°8 HRPD, N°14 3GPD-SIP and N°15 3GPD-MIP.

#### PE-CSIM-by-Template-2

```

csimValue ProfileElement ::= csim : {
  csim-header {
    mandated NULL,
    identification 712
  },
  templateID { 2 23 143 1 2 10},
  adf-csim {
    fileDescriptor : {
      fileID '7F88'H,
      dfName 'A0000003431002FF33FF018900000100'H,
      pinStatusTemplateDO '01810A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      linkPath '2F06'H
    }
  },
  ef-call-count {},
  ef-imsi-m {},
  ef-imsi-t {},
  ef-tmsi {},
  ef-ah {},
  ef-aop {
    -- Analog Operational Parameters 1 byte
    fillFileContent : '01'H
  },
  ef-alloc {

```

```

-- Analog Location and Registration Indicators  7
bytes
    fillFileContent : '01020304050607'H
},
ef-cdmahome {
-- CDMAHome size
    fileDescriptor : {
        efFileSize '05'H}
},
ef-znregi {
-- ef-znregi size
    fileDescriptor : {
        efFileSize '08'H}
},

ef-snregi {
-- CDMA System-Network Registration Indicators  7
bytes
    fillFileContent : '01020304050607'H
},
ef-distregi {},
ef-accolc {
-- Access Overload Class ACCOLCp  1 byte
    fillFileContent : '01'H
},
ef-term {
-- Call Termination Mode Preferences  1 byte
    fillFileContent : '01'H
},
ef-acp {
-- Analog Channel Preferences  7 bytes
    fillFileContent : '01020304050607'H
},
ef-prl {
-- Preferred Roaming List MAX_PR_LIST_SIZE
    fileDescriptor : {
        efFileSize '0C'H
    },
    fillFileContent : '0102030405060708090A0B0C'H
},
ef-ruimid {
-- UIM_ID  8 bytes
    fileDescriptor : {
        efFileSize '08'H
    },
    fillFileContent : '0102030405060708'H
},
ef-csim-st {
-- CSIM Service Table  X bytes, X>=1  (SAIP 6 bytes)
    fillFileContent : '806C00000000'H
},
ef-spc {},
ef-otapaspc {},

ef-namlock {
-- namlock  1 byte
    fillFileContent : '01'H
},
ef-ota {
-- OTASP/OTAPA Features  File size: 2N + 1 bytes
(SAIP 17 bytes)
    fillFileContent :
'0102030405060708090A0B0C0D0E0F1011'H
},
ef-sp {

```

```

    -- Service Preferences 1 byte
    fillFileContent : '01'H
},
ef-esn-meid-me {},
ef-li {},

ef-usgind {
    -- UIM_ID/SF_EUIMID Usage Indicator 1 byte
    fillFileContent : '01'H
},
ef-ad {},

ef-max-prl {
    -- Maximum PRL 2 or 4 bytes (SAIP 4 bytes)
    fillFileContent : '01020304'H
},
    ef-spcs {
        -- SPC Status 1 byte
        fillFileContent : '00'H
    },
ef-mecrp {},

ef-home-tag {
    -- Home System Tag X bytes
    fileDescriptor : {
        efFileSize '04'H
    },
    fillFileContent : '01020304'H
},
    ef-group-tag {
        -- Group Tag List GROUP_TAG_LIST_SIZE bytes
        fileDescriptor : {
            efFileSize '04'H
        },
        fillFileContent : '01020304'H
    },
    ef-specific-tag {
        -- Specific Tag List SPEC_TAG_LIST_SIZE bytes
        fileDescriptor : {
            efFileSize '04'H
        },
        fillFileContent : '01020304'H
    },
    ef-call-prompt {
        -- Call Prompt List CALL_PRMPPT_LIST_SIZE bytes
        fileDescriptor : {
            efFileSize '04'H
        },
        fillFileContent : '01020304'H
    }
}
}

```

#### 6.14.7.1.3.

#### PE-CSIM-by-Template-1-v2

The content is identical to PE-CSIM-by-Template-1 as defined in 6.14.7.1.1, except:

- The value of `identification` field which equals 713
- The value of `templateID` {2 23 143 1 2 10 2}

#### 6.14.7.1.4. *PE-CSIM-by-Template-2-v2*

The content is identical to PE-CSIM-by-Template-2 as defined in 6.14.7.1.2, except:

- The value of `identification` field which equals 714
- The value of `templateID` {2 23 143 1 2 10 2}

#### 6.14.7.2. OPT-CSIM

##### 6.14.7.2.1. *PE-OPT-CSIM-by-Template-1*

#### PE-OPT-CSIM-by-Template-1

```
optcsimValue ProfileElement ::= opt-csim : {
  optcsim-header {
    mandated NULL,
    identification 721
  },
  templateID { 2 23 143 1 2 11},
  ef-est {
    fileDescriptor : {

      efFileSize '02'H
    },
    fillFileContent : '000C'H
  }
}
```

##### 6.14.7.2.2. *PE-OPT-CSIM-by-Template-2*

It contains enabled services for N°8 HRPD, N°14 3GPD-SIP and N°15 3GPD-MIP.

#### PE-OPT-CSIM-by-Template-2

```
optcsimValue ProfileElement ::= opt-csim : {
  optcsim-header {
    mandated NULL,
    identification 722
  },
  templateID { 2 23 143 1 2 11},
  ef-me3gpdopc {
  },
  ef-3gpdopm {
    -- This EF stores the 3GPD Operation Mode Parameter
    Block Specified by Operator
    fillFileContent : '01'H
  },
  ef-sipcap {
    -- This EF stores the SimpleIP Capability Parameters
    Block Specified by Operator
    fillFileContent : '14886000'H
  },
  ef-mipcap{
    -- This EF stores the MobileIP Capability Parameter
    Block Specified by Operator
    fillFileContent : '1488404200'H
  }
}
```





```

ef-atc{
  -- Access Terminal ClassSpecified by Operator
    fillFileContent : '01'H
},
ef-est {
  fileDescriptor : {
    efFileSize '02'H
  },
  fillFileContent : '806C'H
}
}

```

#### 6.14.7.2.3. *PE-OPT-CSIM-by-Template-1-v2*

The content is identical to PE-OPT-CSIM-by-Template-1 as defined in 6.14.7.2.1, except:

- The value of `identification` field which equals 723
- The value of `templateID` {2 23 143 1 2 11 2}

#### 6.14.7.2.4. *PE-OPT-CSIM-by-Template-2-v2*

The content is identical to PE-OPT-CSIM-by-Template-2 as defined in 6.14.7.2.2, except:

- The value of `identification` field which equals 724
- The value of `templateID` {2 23 143 1 2 11 2}

### 6.14.8 PE-PINCodes (Local PIN)

#### 6.14.8.1. PE-PINCodes-Local-PIN-1

##### PE-PINCodes-Local-PIN-1

```

localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 81
  },
  pinCodes pinconfig : {
    {
      keyReference secondPINAppl1,
      pinValue '31313131313131'H,
      pinAttributes 1,
      maxNumOfAttempts-retryNumLeft 34
    }
  }
}

```

#### 6.14.8.2. PE-PINCodes-Local-PIN-2

##### PE-PINCodes-Local-PIN-2

```

localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 82
  }
}

```

```

},
pinCodes pinconfig : {
  {
    keyReference secondPINApp12,
-- PIN = 1234
    pinValue '31323334FFFFFFFF'H,
    unblockingPINReference secondPUKApp11,
    -- PIN is Enabled
    pinAttributes 1,
    -- maxNumOfAttempts:2, retryNumLeft:2
    maxNumOfAttempts-retryNumLeft 34
  }
}
}

```

#### 6.14.8.3. PE-PINCodes-Local-PIN-3

This PE contains a disabled secondPINApp11.

#### PE-PINCodes-Local-PIN-3

```

localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 83
  },
  pinCodes pinconfig : {
    {
      keyReference secondPINApp11,
      pinValue '31313131313131'H,
      pinAttributes 4,
      maxNumOfAttempts-retryNumLeft 34
    }
  }
}

```

#### 6.14.8.4. PE-PINCodes-Local-PIN-4

#### PE-PINCodes-Local-PIN-4

```

localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 84
  },
  pinCodes pinconfig : {
    {
      keyReference secondPINApp11,
-- PIN = 1234
      pinValue '31323334FFFFFFFF'H,
      unblockingPINReference pukApp11,
      -- PIN is Enabled
      pinAttributes 1,
      -- maxNumOfAttempts:2, retryNumLeft:2
      maxNumOfAttempts-retryNumLeft 34
    }
  }
}

```

#### 6.14.8.5. PE-PINCodes-Local-PIN-5

##### PE-PINCodes-Local-PIN-5

```
localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 85
  },
  pinCodes pinconfig : {
    {
      keyReference secondPINApp1,
      pinValue '31323334FFFFFFFF'H,
      pinAttributes 1,
      maxNumOfAttempts-retryNumLeft 34
    }
  }
}
```

#### 6.14.8.6. PE-PINCodes-Local-PIN-6

It contains maxNumOfAttempts-retryNumLeft with different values: maxNumOfAttempts is 3 and retryNumLeft is 2.

##### PE-PINCodes-Local-PIN-6

```
localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 86
  },
  pinCodes pinconfig : {
    {
      keyReference secondPINApp1,
      pinValue '31323334FFFFFFFF'H,
      pinAttributes 1,
      maxNumOfAttempts-retryNumLeft 50
    }
  }
}
```

#### 6.14.8.7. PE-PINCodes-Local-PIN-7

##### PE-PINCodes-Local-PIN-7

```
localPinValue ProfileElement ::= pinCodes : {
  pin-Header {
    mandated NULL,
    identification 87
  },
  pinCodes pinconfig : {
    {
      keyReference secondPINApp1,
      pinValue '3132333435363738'H,
      maxNumOfAttempts-retryNumLeft 34
    }
  }
}
```

### 6.14.9 PE-AKA Parameters

#### 6.14.9.1 PE-AKAParameters-1

This PE contains parameters for AKA authentication algorithm: MILENAGE.

##### PE-AKAParameters-1

```
akaMilenage ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 91
  },
  algoConfiguration algoParameter : {
    algorithmID milenage,
    algorithmOptions '01'H,      -- RES and MAC 64 bits,
    CK and IK 128 bits
    key '465B5CE8B199B49FAA5F0A2EE238A6BC'H ,
    opc 'CD63CB71954A9F4E48A5994E37A02BAF'H ,
    -- rotationConstants uses default: '4000204060'H,
    -- xoringConstants uses default:
    '00000000000000000000000000000000100000000000000020000000000
    000000400000000000000008'H,
    authCounterMax '010203'H
  },
  sqnOptions '0E'H      -- Anonymity key used, SQN wrap
  around not allowed, SQN Delta and SQN Age Limit are not
  used
  -- sqnDelta uses default: '000010000000'H
  -- sqnAgeLimit uses default: '000010000000'H
  -- sqnInit: uses default: all bytes zero
}
```

#### 6.14.9.2 PE-AKAParameters-2

This PE contains parameters for AKA authentication algorithm: TUAK.

##### PE-AKAParameters-2

```
akaTUAK ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 92
  },
  algoConfiguration algoParameter : {
    algorithmID tuak,
    algorithmOptions '00'H,      -- RES 32 bits, MAC 64
    bits, CK and IK 128 bits
    key 'ababababababababababababababababab'H,
    opc
    'bd04d9530e87513c5d837ac2ad954623a8e2330c115305a73eb45d1f4
    0cccbff'H,
    -- rotationConstants ignored for TUAK,
    -- xoringConstants ignored for TUAK,
    authCounterMax '010203'H
  },
  sqnOptions '0E'H      -- Anonymity key used, SQN wrap
  around not allowed, SQN Delta and SQN Age Limit are not
  used
  -- sqnDelta uses default: '000010000000'H
  -- sqnAgeLimit uses default: '000010000000'H
  -- sqnInit: uses default: all bytes zero
}
```

### 6.14.9.3. PE-AKAParameters-3

This PE contains AKA parameters mapped to NAA USIM excluding SQN.

#### PE-AKAParameters-3

```
usimMappedAKA ProfileElement ::= akaParameter : {
    aka-header {
        mandated NULL,
        identification 93
    },
    algoConfiguration mappingParameter : {
        -- share sqnInit, sqnOptions, sqnDelta, sqnAgeLimit
        mappingOptions '02'H,
        mappingSource 'A0000000871002FF33FF018900000100'H --
USIM
    }
    -- sqnOptions uses default: '02'H,
    -- Anonymity key used, SQN wrap around not allowed, SQN
Delta & Age Limit used)
    -- sqnDelta      shared
    -- sqnAgeLimit    shared
    -- sqnInit        shared
}
```

### 6.14.9.4. PE-CDMAParameters-1

This PE contains parameters for the CSIM authentication algorithm: CAVE.

#### PE-CDMAParameters-1

```
cdmaParam ProfileElement ::= cdmaParameter : {
    cdma-header {
        mandated NULL,
        identification 94
    },
    authenticationKey '0102030405060708'H,
    ssd '0123456789ABCDEF0123456789ABCDEF'H,
    --HRDP Access Authentication Value:
    0x43484150434841504348415043484150
    hrpdAccessAuthenticationData
    '821A420A821A420A821A420A821A420A80'H,
    /*
Simple IP CHAP SS Parameters:
- Value:
entry 00: 0x43484150434841504348415043484150
*/
    simpleIPAuthenticationData
    '10821A420A821A420A821A420A821A420A80'H,
    /*
Mobile IP SS Parameters:
- Value:
entry 00:
- MN-AAA-SS: 0x31323334353637383930313233343536
- MN-HA-SS: 0x303031313232333334343535363737
*/
```

```

mobileIPAuthenticationData
'1081899199A1A9B1B9C1C981899199A1A9B40C0C0C4C4C8C8CCCCD0D0
D4D4D8D8DCDC0'H
}

```

#### 6.14.9.5. PE-AKAParameters-4

This PE contains parameters for AKA authentication algorithm: usim-test-algorithm.

##### PE-AKAParameters-4

```

akaTestAlg ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 95
  },
  algoConfiguration algoParameter : {
    algorithmID usim-test-algorithm,
    algorithmOptions '02'H,      -- RES 128 bits, MAC 64
bits, CK and IK 128 bits
    key '000102030405060708090A0B0C0D0E0F'H,
    opc '00'H -- ignored for usim-test-algorithm
    -- rotationConstants ignored for usim-test-slgorithm,
    -- xoringConstants ignored for usim-test-slgorithm,
    -- authCounterMax ignored for usim-test-slgorithm
  }
  -- sqnOptions ignored for usim-test-algorithm
  -- sqnDelta ignored for usim-test-algorithm
  -- sqnAgeLimit ignored for usim-test-algorithm
  -- sqnInit: ignored for usim-test-algorithm
}

```

#### 6.14.9.6. PE-AKAParameters-5

This PE contains parameters for AKA authentication algorithm: TUAK with 256 bit key.

##### PE-AKAParameters-5

```

akaTUAK ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 96
  },
  algoConfiguration algoParameter : {
    algorithmID tuak,
    algorithmOptions '09'H,      -- RES 64 bits, MAC 128
bits, CK and IK 128 bits
    key
'ffffefdfcfbfaf9f8f7f6f5f4f3f2f1f0efeeedecebeae9e8e7e6e5e4e
3e2e1e0'H,
    opc
'305425427e18c503c8a4b294ea72c95d0c36c6c6b29d0c65de5974d59
77f8524'H,
    -- rotationConstants ignored for TUAK,
    -- xoringConstants ignored for TUAK,
    authCounterMax '010203'H
  },
  sqnOptions '0E'H -- Anonymity key used, SQN wrap
around not allowed, SQN Delta and SQN Age Limit are not
used
  -- sqnDelta uses default: '000010000000'H
}

```

```
-- sqnAgeLimit  uses default: '000010000000'H
-- sqnInit:      uses default: all bytes zero
}
```

#### 6.14.9.7. PE-AKAPParameters-6

This PE contains parameters for AKA authentication algorithm: TUAK with 256 bit key and numberOfKeccak defined.

##### PE-AKAPParameters-6

```
akaTUAK ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 97
  },
  algoConfiguration algoParameter : {
    algorithmID tuak,
    algorithmOptions '53'H,      -- RES 256 bits, MAC
    256 bits, CK and IK 256 bits
    key
    '1574ca56881d05c189c82880f789c9cd4244955f4426aa2b69c29f157
    70e5aa5'H,
    opc
    'b04a66f26c62fcd6c82de22a179ab65506ecf47f56245cd149966cfa9
    cec7a51'H,
    -- rotationConstants ignored for TUAK,
    -- xoringConstants ignored for TUAK,
    authCounterMax '010203'H,
    numberOfKeccak 2
  },
  sqnOptions '0E'H      -- Anonymity key used, SQN wrap
  around not allowed, SQN Delta and SQN Age Limit are not
  used
  -- sqnDelta  uses default: '000010000000'H
  -- sqnAgeLimit uses default: '000010000000'H
  -- sqnInit:   uses default: all bytes zero
}
```

#### 6.14.9.8. PE-AKAPParameters-7

This PE contains parameters for AKA authentication algorithm: MILENAGE. Parameter authCounterMax is set to 5 and SQN checking is disabled (by setting SQN wrap around).

##### PE-AKAPParameters-7

```
akaMilenage ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 98
  },
  algoConfiguration algoParameter : {
    algorithmID milenage,
    algorithmOptions '01'H,      -- RES and MAC 64 bits,
    CK and IK 128 bits
    key '465B5CE8B199B49FAA5F0A2EE238A6BC'H ,
    opc 'CD63CB71954A9F4E48A5994E37A02BAF'H ,
    -- rotationConstants uses default: '4000204060'H,
    -- xoringConstants   uses default:
    '0000000000000000000000000000000000000000000000000000000000000000
    0000004000000000000000008'H,
    authCounterMax '000005'H
  }
}
```

[illegible]

#### 6.14.9.9. PE-AKAPParameters-8

This PE contains parameters for AKA authentication algorithm: MILENAGE. Parameters rotationConstants and xoringConstants are defined.

## PE-AKAParameters-8

```

akaMilenage ProfileElement ::= akaParameter : {
    aka-header {
        mandated NULL,
        identification 99
    },
    algoConfiguration algoParameter : {
        algorithmID milenage,
        algorithmOptions '01'H,          -- RES and MAC 64 bits,
                                         CK and IK 128 bits
        key 'FEC86BA6EB707ED08905757B1BB44B8F'H,
        opc '1006020F0A478BF6B699F15C062E42B3'H,
        rotationConstants '4307203154'H,
        xoringConstants
        'A0000000000000000000000005500000000B000000000000000000004
        400000000000C0000000000000000000033000000000000D000000000000
        000000220000000000000000E000000000000000011000000'H
    },
    sqnOptions '0C'H -- Anonymity key used, SQN wrap around
allowed, SQN Delta and SQN Age Limit are not used
-- sqnDelta      uses default: '000010000000'H
-- sqnAgeLimit   uses default: '000010000000'H
-- sqnInit:      uses default: all bytes zero
}

```

#### 6.14.9.10. PE-AKAPParameters-9

This PE contains parameters for AKA authentication algorithm: TUAK with 256 bit key. It adheres to the authentication parameter length restrictions from [TS 133102].

## PE-AKAParameters-9

```
akaTUAK ProfileElement ::= akaParameter : {
    aka-header {
        mandated NULL,
        identification 910
    },
    algoConfiguration algoParameter : {
```



```

        algorithmID tuak,
        algorithmOptions '01'H,      -- RES and MAC 64 bits,
CK and IK 128 bits
        key
'fffe fd fcf bfa f9f 8f 7f 6f 5f 4f 3f 2f 1f 0e ffee de ce be ae 9e 8e 7e 6e 5e 4e
3e 2e 1e 0'H,
        opc
'305425427e18c503c8a4b294ea72c95d0c36c6c6b29d0c65de5974d59
77f8524'H,
--    rotationConstants ignored for TUAK,
--    xoringConstants ignored for TUAK,
        authCounterMax '010203'H
    },
    sqnOptions '0E'H      -- Anonymity key used, SQN wrap
around not allowed, SQN Delta and SQN Age Limit are not
used
-- sqnDelta    uses default: '000010000000'H
-- sqnAgeLimit uses default: '000010000000'H
-- sqnInit:    uses default: all bytes zero
}

```

#### 6.14.9.11. PE-AKAParameters-10

This PE contains parameters for AKA authentication algorithm: TUAK with 256 bit key and numberOfKeccak defined. It adheres to the authentication parameter length restrictions from [TS 133102].

##### PE-AKAParameters-10

```

akaTUAK ProfileElement ::= akaParameter : {
    aka-header {
        mandated NULL,
        identification 911
    },
    algoConfiguration algoParameter : {
        algorithmID tuak,
        algorithmOptions '02'H,      -- RES 128 bits, MAC 64
bits, CK and IK 128 bits
        key '
1574ca56881d05c189c82880f789c9cd4244955f4426aa2b69c29f1577
0e5aa5'H,
        opc '
b04a66f26c62fcd6c82de22a179ab65506ecf47f56245cd149966cfa9c
ec7a51'H,
--    rotationConstants ignored for TUAK,
--    xoringConstants ignored for TUAK,
        authCounterMax '010203'H,
        numberOfKeccak 2
    },
    sqnOptions '0E'H      -- Anonymity key used, SQN wrap
around not allowed, SQN Delta and SQN Age Limit are not
used
-- sqnDelta    uses default: '000010000000'H
-- sqnAgeLimit uses default: '000010000000'H
-- sqnInit:    uses default: all bytes zero
}

```

This PE contains parameters for AKA authentication algorithm: MILENAGE. SQN wrap around deactivated.

[illegible]

This PE contains parameters for AKA authentication algorithm: MILENAGE. SQN delta and age limit set.

```
akaMilenage ProfileElement ::= akaParameter : {  
    aka-header {  
        mandated NULL,  
        identification 913  
    },  
    algoConfiguration algoParameter : {  
        algorithmID milenage,  
        algorithmOptions '01'H,          -- RES and MAC 64 bits,  
CK and IK 128 bits  
        key '465B5CE8B199B49FAA5F0A2EE238A6BC'H ,  
        opc 'CD63CB71954A9F4E48A5994E37A02BAF'H ,  
  
--      rotationConstants uses default: '4000204060'H,  
--      xoringConstants   uses default:  
'00000000000000000000000000000000001000000000000000002000000000  
00000040000000000000000000000000H,  
        authCounterMax '001000'H
```

```

    },
    -- sqnOptions uses default: '02'H Anonymity key used, SQN
    wrap around not allowed, SQN Delta and SQN Age Limit are
    used
    sqnDelta '000000001000'H,
    sqnAgeLimit '000000000800'H
    -- sqnInit:      uses default: all bytes zero
}

```

#### 6.14.9.14. PE-AKAParameters-13

This PE contains parameters for AKA authentication algorithm: usim-test-algorithm with 32 bit RES length.

##### PE-AKAParameters-13

```

akaTestAlg ProfileElement ::= akaParameter : {
    aka-header {
        mandated NULL,
        identification 914
    },
    algoConfiguration algoParameter : {
        algorithmID usim-test-algorithm,
        algorithmOptions '00'H,      -- RES 32 bits, MAC 64
bits, CK and IK 128 bits
        key '000102030405060708090A0B0C0D0E0F'H,
        opc '00'H -- ignored for usim-test-algorithm
        -- rotationConstants ignored for usim-test-algorithm,
        -- xoringConstants ignored for usim-test-algorithm,
        -- authCounterMax ignored for usim-test-algorithm
    }
    -- sqnOptions ignored for usim-test-algorithm
    -- sqnDelta ignored for usim-test-algorithm
    -- sqnAgeLimit ignored for usim-test-algorithm
    -- sqnInit: ignored for usim-test-algorithm
}

```

#### 6.14.9.15. PE-AKAParameters-14

This PE contains AKA parameters mapped to NAA USIM, including SQN array.

##### PE-AKAParameters-14

```

usimMappedAKA ProfileElement ::= akaParameter : {
    aka-header {
        mandated NULL,
        identification 915
    },
    algoConfiguration mappingParameter : {
        -- share sqnOptions, sqnDelta, sqnAgeLimit and SQN
array
        mappingOptions '06'H,
        mappingSource 'A0000000871002FF33FF018900000100'H --
USIM
    }
    -- sqnOptions  shared,
    -- sqnDelta    shared
    -- sqnAgeLimit shared
    -- sqnInit     shared as part of SQN array
}

```

#### 6.14.9.16. PE-AKAParameters-15

This PE contains parameters for AKA authentication algorithm TUAK without authCounterMax.

##### PE-AKAParameters-15

```
akaTUAK ProfileElement ::= akaParameter : {
  aka-header {
    mandated NULL,
    identification 916
  },
  algoConfiguration algoParameter : {
    algorithmID tuak,
    algorithmOptions '00'H,      -- RES 32 bits, MAC 64
bits, CK and IK 128 bits
    key 'abababababababababababababababab'H,
    opc
'bd04d9530e87513c5d837ac2ad954623a8e2330c115305a73eb45d1f4
0cccbff'H
    -- rotationConstants ignored for TUAK,
    -- xoringConstants ignored for TUAK
  },
  sqnOptions '0E'H      -- Anonymity key used, SQN wrap
around not allowed, SQN Delta and SQN Age Limit are not
used
  -- sqnDelta uses default: '000010000000'H
  -- sqnAgeLimit uses default: '000010000000'H
  -- sqnInit: uses default: all bytes zero
}
```

#### 6.14.9.17. PE-CDMAParameters-2

This PE contains parameters for the CSIM authentication algorithm: CAVE.

##### PE-CDMAParameters-2

```
cdmaParam ProfileElement ::= cdmaParameter : {
  cdma-header {
    mandated NULL,
    identification 917
  },
  authenticationKey '0102030405060708'H,
  ssid '0123456789ABCDEF0123456789ABCDEF'H,
/*
Mobile IP SS Parameters:
- Value:
entry 00:
- MN-AAA-SS: 0x31
- MN-HA-SS: 0x30
*/
  mobileIPAuthenticationData '1009884C00'H
}
```

## 6.14.10 PE-SecurityDomain (MNO SD)

### 6.14.10.1 PE-SecurityDomain-MNO-SD-1

Default PE-SecurityDomain for MNO-SD.

#### PE-SecurityDomain-MNO-SD-1

```
mnoSdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 101
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A000000151000000'H,
    applicationPrivileges '82DC00'H,
    -- Secured
    lifeCycleState '0F'H,
    -- SCP80 supported acc. UICC Config., extradition
    supported
    applicationSpecificParametersC9
    '810280008201F08701F0'H,
    -- other parameters may be necessary
    applicationParameters {
      -- TAR: B20100, MSL: 12
      uiccToolkitApplicationSpecificParametersField
        '0100010100000202011203B2010000'H
    }
  },
  keyList {
    {
      -- C-ENC + R-ENC
      keyUsageQualifier '38'H,
      -- may be used by SD and application
      keyAccess '00'H,
      -- ENC key
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          -- AES (16, 24 or 32 bytes long keys)
          keyType '88'H,
          keyData '11223344556677889910111213141516'H
        }
      }
    },
    {
      -- C-MAC + R-MAC
      keyUsageQualifier '34'H,
      -- may be used by SD and application
      keyAccess '00'H,
      -- MAC key
      keyIdentifier '02'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          -- AES (16, 24 or 32 bytes long keys)
          keyType '88'H,
          keyData '11223344556677889910111213141516'H
        }
      }
    }
  },
}
```

```

{
  -- C-DEK + R-DEK
  keyUsageQualifier 'C8'H,
  -- may be used by SD and application
  keyAccess '00'H,
  -- data ENC key
  keyIdentifier '03'H,
  keyVersionNumber '01'H,
  keyComponents {
    {
      -- AES (16, 24 or 32 bytes long keys)
      keyType '88'H,
      keyData '11223344556677889910111213141516'H
    }
  }
}
}
}

```

#### 6.14.10.2. VOID

#### 6.14.10.3. PE-SecurityDomain-MNO-SD-3

Compared to PE-SecurityDomain-MNO-SD-1 defined in 6.14.10.1 the first key of the keylist contains two key component definitions.

#### PE-SecurityDomain-MNO-SD-3

```

mnoSdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 103
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A000000151000000'H,
    applicationPrivileges '82DC00'H,
    -- Secured
    lifeCycleState '0F'H,
    -- SCP80 supported acc. UICC Config. , extradition
    supported
    applicationSpecificParametersC9
    '810280008201F08701F0'H,
    -- other parameters may be necessary
    applicationParameters {
      -- TAR: B20100, MSL: 12
      uiccToolkitApplicationSpecificParametersField
        '0100010100000202011203B2010000'H
    }
  },
  keyList {
    {
      -- C-ENC + R-ENC
      keyUsageQualifier '38'H,
      -- may be used by SD and application
      keyAccess '00'H,
      -- ENC key
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponents {
        {

```

```

        -- AES (16, 24 or 32 bytes long keys)
        keyType '88'H,
        keyData '11223344556677889910111213141516'H
    },
    {
        -- AES (16, 24 or 32 bytes long keys)
        keyType '88'H,
        keyData '11223344556677889910111213141516'H
    }
},
{
    -- C-MAC + R-MAC
    keyUsageQualifier '34'H,
    -- may be used by SD and application
    keyAccess '00'H,
    -- MAC key
    keyIdentifier '02'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 bytes long keys)
            keyType '88'H,
            keyData '11223344556677889910111213141516'H
        }
    }
},
{
    -- C-DEK + R-DEK
    keyUsageQualifier 'C8'H,
    -- may be used by SD and application
    keyAccess '00'H,
    -- data ENC key
    keyIdentifier '03'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 long keys)
            keyType '88'H,
            keyData '11223344556677889910111213141516'H
        }
    }
}
}
}

```

#### 6.14.10.4. PE-SecurityDomain-MNO-SD-4

Compared to PE-SecurityDomain-MNO-SD-1 defined in 6.14.10.1 the PE SD contains the sdPerso Data definition.

#### PE-SecurityDomain-MNO-SD-4

```

mnoSdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 104
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A000000151000000'H,
        applicationPrivileges '82DC00'H,

```

```

-- Secured
lifeCycleState '0F'H,
-- SCP80 supported acc. UICC Config. , extradition
supported
applicationSpecificParametersC9
'810280008201F08701F0'H,
-- other parameters may be necessary
applicationParameters {
-- TAR: B20100, MSL: 12
uiccToolkitApplicationSpecificParametersField
'0100010100000202011203B2010000'H
}
},
keyList {
{
-- C-ENC + R-ENC
keyUsageQualifier '38'H,
-- may be used by SD and application
keyAccess '00'H,
-- ENC key
keyIdentifier '01'H,
keyVersionNumber '01'H,
keyComponents {
{
-- AES (16, 24 or 32 bytes long keys)
keyType '88'H,
keyData '11223344556677889910111213141516'H
}
}
},
{
-- C-MAC + R-MAC
keyUsageQualifier '34'H,
-- may be used by SD and application
keyAccess '00'H,
-- MAC key
keyIdentifier '02'H,
keyVersionNumber '01'H,
keyComponents {
{
-- AES (16, 24 or 32 bytes long keys)
keyType '88'H,
keyData '11223344556677889910111213141516'H
}
}
},
{
-- C-DEK + R-DEK
keyUsageQualifier 'C8'H,
-- may be used by SD and application
keyAccess '00'H,
-- data ENC key
keyIdentifier '03'H,
keyVersionNumber '01'H,
keyComponents {
{
-- AES (16, 24 or 32 bytes long keys)
keyType '88'H,
keyData '11223344556677889910111213141516'H
}
}
}
},
-- IIN, CIN and Card Recognition Data with SCP80
sdPersoData {

```



```

    '0070084206010203040506'H,
    '0070084506060504030201'H,
    '0070326630732E06072A864886FC6B01600B06092A864886FC6B02020
    2630906072A864886FC6B03640B06092A864886FC6B048000'H
  }
}

```

#### 6.14.10.5. PE-SecurityDomain-MNO-SD-5

Compared to PE-SecurityDomain-MNO-SD-1 defined in 6.14.10.1 the instance definition is extended by the sdPersoData definition containing HTTPs configuration data.

#### PE-SecurityDomain-MNO-SD-5

```

mnoSdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 105
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A000000151000000'H,
    applicationPrivileges '82DC00'H,
    -- Secured
    lifeCycleState '0F'H,
    -- SCP80 supported acc. UICC Config.
    -- SCP81 supported
    applicationSpecificParametersC9 '8102800081028104'H,
    -- other parameters may be necessary
    applicationParameters {
      -- TAR: B20100, MSL: 12
      uiccToolkitApplicationSpecificParametersField
        '0100010100000202011203B2010000'H
    }
  },
  keyList {
    {
      -- C-ENC + R-ENC
      keyUsageQualifier '38'H,
      -- may be used by SD and application
      keyAccess '00'H,
      -- ENC key
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          -- AES (16, 24 or 32 bytes long keys)
          keyType '88'H,
          keyData '11223344556677889910111213141516'H
        }
      }
    },
    {
      -- C-MAC + R-MAC
      keyUsageQualifier '34'H,
      -- may be used by SD and application
      keyAccess '00'H,
      -- MAC key
      keyIdentifier '02'H,
      keyVersionNumber '01'H,
      keyComponents {
        {

```



}

**6.14.10.6. VOID****6.14.10.7. PE-SecurityDomain-MNO-SD-7**

MNO SD with following RSA Keys:

PK_RSA	Public Key: public exponent = 010001 modulus = F51A5B456A37C84317B9F84099975BF1FEC17AF3AE31BC6158D92DDFE1A48B636BF4C2 BEAA2002420D2B01F8E3A5DC00E501B937669825731117CB4AF81ED759B23298C59852C A1ECB159F261221408E428B16A24E15DAD384E5B770A3F3E5B291390062464D88CC9B13 AA0ECF305C285E2104F91A4C8DF2FE42EFB4F93C94E7
SK_RSA	Private key in CRT format: P = F634C80DC443C65EAFB07A08EE6B6A38D4E384A93BA4D8F61510DDFD469D49771315F2 C83A35732CF18411F39DBAD135DD3E77FC0E8BF9AA55AB918C200B1293 Q = FEDA572B1BFB2A7DC6CB3149515D1547280435639340E1F345F8906F044DB862A60280D B6823A9629FD760692CADB0F493DCC66821FB3847147C44F054D7C4DD DP = 0A1C02B6E5FF2E6F06E1C53106B12C6C66F96CA2124BE388BF36B116CC467B14C398DC 1E329DAD3C0432BB15F8BD0A081F2C887AB612334F363354479FAD34B7 DQ = DB299B02B89A632D2CD2BA7CC99A99DCCA5DEC27C88F688013B1314C37503AFBA2B5C E686083227C6CE703C30EA803E0207420AF96617B412D2DBCFF4C870D85 PQ = 57ADD3EBD94B583891F62350B28D834F4D6159369E9DF78C785BDD907EDD22E673647D3 ABB7B8DB5057C34E3D272237355BD8988FAF3813087E86A5DD97FFF7F

**PE-SecurityDomain-MNOSD-7**

```

value1 ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 107
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A000000151000000'H,
    applicationPrivileges '82DC00'H,
    lifeCycleState '0F'H,
    applicationSpecificParametersC9
'810280008201F08701F0'H,
    applicationParameters {
      uiccToolkitApplicationSpecificParametersField
'0100010100000202011203B2010000'H
    }
  },
  keyList {
    {
      keyUsageQualifier '38'H,
      keyAccess '00'H,
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,
          keyData '11223344556677889910111213141516'H
        }
      }
    }
  },
  {

```

```

        keyUsageQualifier '34'H,
        keyAccess '00'H,
        keyIdentifier '02'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                keyType '88'H,
                keyData '11223344556677889910111213141516'H
            }
        },
        {
            keyUsageQualifier 'C8'H,
            keyAccess '00'H,
            keyIdentifier '03'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677889910111213141516'H
                }
            }
        },
        {
            keyUsageQualifier '4C'H,
            keyAccess '00'H,
            keyIdentifier '01'H,
            keyVersionNumber '74'H,
            keyComponents {
                {
                    keyType 'A1'H,
                    keyData
'F51A5B456A37C84317B9F84099975BF1FEC17AF3AE31BC6158D92DDFE
1A48B636BF4C2BEAA2002420D2B01F8E3A5DC00E501B93766982573111
7CB4AF81ED759B23298C59852CA1ECB159F261221408E428B16A24E15D
AD384E5B770A3F3E5B291390062464D88CC9B13AA0ECF305C285E2104F
91A4C8DF2FE42EFB4F93C94E7'H
                },
                {
                    keyType 'A0'H,
                    keyData '010001'H
                }
            }
        },
        {
            keyUsageQualifier '4C'H,
            keyAccess '00'H,
            keyIdentifier '03'H,
            keyVersionNumber '74'H,
            keyComponents {
                {
                    keyType 'A4'H,
                    keyData
'F634C80DC443C65EAFB07A08EE6B6A38D4E384A93BA4D8F61510DDFD4
69D49771315F2C83A35732CF18411F39DBAD135DD3E77FC0E8BF9AA55A
B918C200B1293'H
                },
                {
                    keyType 'A5'H,
                    keyData
'FEDA572B1BFB2A7DC6CB3149515D1547280435639340E1F345F8906F0
44DB862A60280DB6823A9629FD760692CADB0F493DCC66821FB3847147
C44F054D7C4DD'H
                },
                {
                    keyType 'A6'H,
                    keyData
'57ADD3EBD94B583891F62350B28D834F4D6159369E9DF78C785BDD907
EED22E673647D3ABB7B8DB5057C34E3D272237355BD8988FAF3813087E
86A5DD97FFF7F'H
                },
                {
                    keyType 'A7'H,
                    keyData
'0A1C02B6E5FF2E6F06E1C53106B12C6C66F96CA2124BE388BF36B116C

```

Compared to PE-SecurityDomain-MNO-SD-5 defined in 6.14.10.5 the instance definition is extended by the DNS Parameters under sdPersoData definition.

```

    keyAccess '00'H,
    -- MAC key
    keyIdentifier '02'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 bytes long keys)
            keyType '88'H,
            keyData '11223344556677889910111213141516'H
        }
    },
    {
        -- C-DEK + R-DEK
        keyUsageQualifier 'C8'H,
        -- may be used by SD and application
        keyAccess '00'H,
        -- data ENC key
        keyIdentifier '03'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                -- AES (16, 24 or 32 bytes long keys)
                keyType '88'H,
                keyData '11223344556677889910111213141516'H
            }
        },
    },
    {
        -- PSK
        keyUsageQualifier '3C'H,
        -- may be used by SD and application
        keyAccess '00'H,
        keyIdentifier '01'H,
        keyVersionNumber '40'H,
        keyComponents {
            {
                -- PSK
                keyType '85'H,
                keyData
                'F0C0FAAC0EF1364A3E5EB4229CF797A3752CD0C8277844576B3E05D50
                5A03F21'H
            }
        },
    },
    {
        keyUsageQualifier 'C8'H,
        keyAccess '00'H,
        keyIdentifier '02'H,
        keyVersionNumber '40'H,
        keyComponents {
            {
                keyType '88'H,
                keyData '11223344556677889910111213141516'H
            }
        }
    },
    },
    -- HTTP + DNS Configuration according Amend.B
    sdPersoData {
        '0070AF8581AC8425350702000003000000239020578470A0947534D416
        5554943433C03021F413E05217F000001850A0650534B4944310240018

```



```

keyAccess '00'H,
-- MAC key
keyIdentifier '02'H,
keyVersionNumber '01'H,
keyComponents {
    {
        -- AES (16, 24 or 32 bytes long keys)
        keyType '88'H,
        keyData '11223344556677889910111213141516'H
    }
},
{
    -- C-DEK + R-DEK
    keyUsageQualifier 'C8'H,
    -- may be used by SD and application
    keyAccess '00'H,
    -- data ENC key
    keyIdentifier '03'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 bytes long keys)
            keyType '88'H,
            keyData '11223344556677889910111213141516'H
        }
    }
}
}

```

#### 6.14.10.10. PE-SecurityDomain-MNO-SD-10

Compared to PE-SecurityDomain-MNO-SD-1 defined in 6.14.10.1 a new Key with Key Identifier '02' and Key Version Number '11' has been added.

#### PE-SecurityDomain-MNO-SD-10

```

mnoSdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 1010
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A000000151000000'H,
        applicationPrivileges '82DC00'H,
        -- Secured
        lifeCycleState '0F'H,
        -- SCP80 supported acc. UICC Config., extradition
        supported
        applicationSpecificParametersC9
        '810280008201F08701F0'H,
        -- other parameters may be necessary
        applicationParameters {
            -- TAR: B20100, MSL: 12
            uiccToolkitApplicationSpecificParametersField
            '0100010100000202011203B2010000'H
        }
    }
}

```



```

},
keyList {
    {
        -- C-ENC + R-ENC
        keyUsageQualifier '38'H,
        -- may be used by SD and application
        keyAccess '00'H,
        -- ENC key
        keyIdentifier '01'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                -- AES (16, 24 or 32 long keys)
                keyType '88'H,
                keyData '11223344556677889910111213141516'H
            }
        }
    },
    {
        -- C-MAC + R-MAC
        keyUsageQualifier '34'H,
        -- may be used by SD and application
        keyAccess '00'H,
        -- MAC key
        keyIdentifier '02'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                -- AES (16, 24 or 32 long keys)
                keyType '88'H,
                keyData '11223344556677889910111213141516'H
            }
        }
    },
    {
        -- C-DEK + R-DEK
        keyUsageQualifier 'C8'H,
        -- may be used by SD and application
        keyAccess '00'H,
        -- data ENC key
        keyIdentifier '03'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                -- AES (16, 24 or 32 long keys)
                keyType '88'H,
                keyData '11223344556677889910111213141516'H
            }
        }
    },
    {
        -- C-MAC
        keyUsageQualifier '14'H,
        -- used for DAP as specified in TS 102 226
        keyAccess '00'H,

```

```

-- MAC key
keyIdentifier '02'H,
keyVersionNumber '11'H,
keyComponents {
  {
    -- AES (16, 24 or 32 long keys)
    keyType '88'H,
    keyData '11223344556677889910111213141516'H
  }
}
}
}
}

```

#### 6.14.10.11. PE-SecurityDomain-MNO-SD-11

##### PE-SecurityDomain-MNO-SD-11

```

mnoSdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 1011
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A000000151000000'H,
    applicationPrivileges '82DC00'H,
    -- Secured
    lifeCycleState '0F'H,
    -- SCP80 supported acc. UICC Config., extradition
supported
    applicationSpecificParametersC9
'810280008201F08701F0'H,
    -- other parameters may be necessary
    applicationParameters {
      -- TAR: B20100, MSL: 12
      uiccToolkitApplicationSpecificParametersField
        '0100010100000202011203B2010000'H
    },
    -- IIN, CIN and Card Recognition Data with SCP80
    processData {
      '80E29000084206010203040506'H,
      '80E29000084506060504030201'H,
      '80E29000326630732E06072A864886FC6B01600B06092A864886FC6B0
20202630906072A864886FC6B03640B06092A864886FC6B048000'H}
    },
    keyList {
      {
        -- C-ENC + R-ENC
        keyUsageQualifier '38'H,
        -- may be used by SD and application
        keyAccess '00'H,
        -- ENC key

```

```

keyIdentifier '01'H,
keyVersionNumber '01'H,
keyComponents {
  {
    -- AES (16, 24 or 32 bytes long keys)
    keyType '88'H,
    keyData '11223344556677889910111213141516'H
  }
},
{
  -- C-MAC + R-MAC
  keyUsageQualifier '34'H,
  -- may be used by SD and application
  keyAccess '00'H,
  -- MAC key
  keyIdentifier '02'H,
  keyVersionNumber '01'H,
  keyComponents {
    {
      -- AES (16, 24 or 32 bytes long keys)
      keyType '88'H,
      keyData '11223344556677889910111213141516'H
    }
  },
{
  -- C-DEK + R-DEK
  keyUsageQualifier 'C8'H,
  -- may be used by SD and application
  keyAccess '00'H,
  -- data ENC key
  keyIdentifier '03'H,
  keyVersionNumber '01'H,
  keyComponents {
    {
      -- AES (16, 24 or 32 bytes long keys)
      keyType '88'H,
      keyData '11223344556677889910111213141516'H
    }
  }
}
}
}

```

### 6.14.11 PE-SecurityDomain (SSD, CASD)

#### 6.14.11.1. PE-SecurityDomain-SSD-1

#### PE-SecurityDomain-SSD-1

```

ssdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 111
  }
}

```

```

    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A00000055910100102736456616C7565'H,
        applicationPrivileges '808000'H,
        lifeCycleState '0F'H,
        applicationSpecificParametersC9 '810280008201F0'H,
        applicationParameters {
            uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
        }
    },
    keyList {
        {
            keyUsageQualifier '38'H,
            keyAccess '00'H,
            keyIdentifier '01'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        },
        {
            keyUsageQualifier '34'H,
            -- keyAccess '00'H,
            keyIdentifier '02'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        },
        {
            keyUsageQualifier 'C8'H,
            keyAccess '00'H,
            keyIdentifier '03'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        }
    }
}

```

#### 6.14.11.2. PE-SecurityDomain-SSD-2

Compared to PE-SecurityDomain-SSD-1 defined in 6.14.11.1 no keyList is provided. The lifeCycleState is changed to '07'H (SELECTABLE).

#### PE-SecurityDomain-SSD-2

```

ssdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 112
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A00000055910100102736456616C7565'H,
        applicationPrivileges '808000'H,
        lifeCycleState '07'H,
        applicationSpecificParametersC9 '810280008201F0'H,
        applicationParameters {

```

```

        uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
    }
}
}

```

### 6.14.11.3. VOID

### 6.14.11.4. PE-SecurityDomain-SSD-3

Compared to PE-SecurityDomain-SSD-1 defined in 6.14.11.1, this SSD is self extradited.

### PE-SecurityDomain-SSD-3

```

ssdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 114
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A00000055910100102736456616C7565'H,
        extraditeSecurityDomainAID
'A00000055910100102736456616C7565'H,
        applicationPrivileges '808000'H,
        lifeCycleState '0F'H,
        applicationSpecificParametersC9 '810280008201F0'H,
        applicationParameters {
            uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
        }
    },
    keyList {
        {
            keyUsageQualifier '38'H,
            keyAccess '00'H,
            keyIdentifier '01'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        },
        {
            keyUsageQualifier '34'H,
            -- keyAccess '00'H,
            keyIdentifier '02'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        },
        {
            keyUsageQualifier 'C8'H,
            keyAccess '00'H,
            keyIdentifier '03'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        }
    }
}

```

#### 6.14.11.5. PE-SecurityDomain-SSD-4

Compared to PE-SecurityDomain-SSD-1 defined in 6.14.11.1 this SSD is extradited to SSD-3 defined in 6.14.11.4.

#### PE-SecurityDomain-SSD-4

```

ssdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 115
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A00000055910100102736456616C7566'H,
    extraditeSecurityDomainAID
'A00000055910100102736456616C7565'H,
    applicationPrivileges '808000'H,
    lifeCycleState '0F'H,
    applicationSpecificParametersC9 '810280008201F0'H,
    applicationParameters {
      uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756600'H
    }
  },
  keyList {
    {
      keyUsageQualifier '38'H,
      keyAccess '00'H,
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,
          keyData '11223344556677881122334455667788'H
        }
      }
    },
    {
      keyUsageQualifier '34'H,
      -- keyAccess '00'H,
      keyIdentifier '02'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,
          keyData '11223344556677881122334455667788'H
        }
      }
    },
    {
      keyUsageQualifier 'C8'H,
      keyAccess '00'H,
      keyIdentifier '03'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,
          keyData '11223344556677881122334455667788'H
        }
      }
    }
  }
}

```

#### 6.14.11.6. VOID

### 6.14.11.7. PE-SecurityDomain-SSD-5

It is similar to PE-SecurityDomain-SSD-1 defined in 6.14.11.1 adding the protocol SCP02(mode 55) in the applicationSpecificParameters (C9) and the related keys. Additionally Card Recognition is also added under sdPersoData for SCP02 and SCP80.

#### PE-SecurityDomain-SSD-5

```

ssdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 117
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A00000055910100102736456616C7565'H,
    applicationPrivileges '808000'H,
    lifeCycleState '0F'H,
    applicationSpecificParametersC9
'81028000810202558201F0'H,
    applicationParameters {
      uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
    }
  },
  keyList {
    {
      keyUsageQualifier '38'H,
      keyAccess '00'H,
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,
          keyData '11223344556677881122334455667788'H
        }
      }
    },
    {
      keyUsageQualifier '34'H,
      keyAccess '00'H,
      keyIdentifier '02'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,
          keyData '11223344556677881122334455667788'H
        }
      }
    },
    {
      keyUsageQualifier 'C8'H,
      keyAccess '00'H,
      keyIdentifier '03'H,
      keyVersionNumber '01'H,
      keyComponents {
        {
          keyType '88'H,

```

```

        keyData '11223344556677881122334455667788'H
    }
},
{
    keyUsageQualifier '38'H,
    keyAccess '00'H,
    keyIdentifier '01'H,
    keyVersionNumber '20'H,
    keyComponents {
        {
            keyType '80'H,
            keyData '11223344556677881122334455667788'H
        }
    }
},
{
    keyUsageQualifier '34'H,
    keyAccess '00'H,
    keyIdentifier '02'H,
    keyVersionNumber '20'H,
    keyComponents {
        {
            keyType '80'H,
            keyData '11223344556677881122334455667788'H
        }
    }
},
{
    keyUsageQualifier 'C8'H,
    keyAccess '00'H,
    keyIdentifier '03'H,
    keyVersionNumber '20'H,
    keyComponents {
        {
            keyType '80'H,
            keyData '11223344556677881122334455667788'H
        }
    }
}
},
-- Security Domain Recognition Data with SCP02 and SCP80
sdPersoData {
'00703F663D733B06072A864886FC6B01600B06092A864886FC6B02020
2630906072A864886FC6B03640B06092A864886FC6B048000640B06092
A864886FC6B040255'H
}
}

```

#### 6.14.11.8. PE-SecurityDomain-SSD-6

It is similar to PE-SecurityDomain-SSD-1 defined in 6.14.11.1 adding Security Domain Recognition Data for SCP80 in sdPersoData.

#### PE-SecurityDomain-SSD-6

```

ssdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 118
    },
    instance {

```



```

    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A00000055910100102736456616C7565'H,
    applicationPrivileges '808000'H,
    lifecycleState '0F'H,
    applicationSpecificParametersC9 '810280008201F0'H,
    applicationParameters {
        uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
    }
},
keyList {
    {
        keyUsageQualifier '38'H,
        keyAccess '00'H,
        keyIdentifier '01'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                keyType '88'H,
                keyData '11223344556677881122334455667788'H
            }
        }
    },
    {
        keyUsageQualifier '34'H,
        -- keyAccess '00'H,
        keyIdentifier '02'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                keyType '88'H,
                keyData '11223344556677881122334455667788'H
            }
        }
    },
    {
        keyUsageQualifier 'C8'H,
        keyAccess '00'H,
        keyIdentifier '03'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                keyType '88'H,
                keyData '11223344556677881122334455667788'H
            }
        }
    }
},
-- Security Domain Recognition Data with SCP80
sdPersoData {
'0070326630732E06072A864886FC6B01600B06092A864886FC6B02020
2630906072A864886FC6B03640B06092A864886FC6B048000'H
}
}

```

#### 6.14.11.9. PE-SecurityDomain-SSD-7

It is similar to PE-SecurityDomain-SSD-1 defined in 6.14.11.1 adding the protocols SCP11a and SCP11c ('i' = '1D') in the applicationSpecificParameters (C9) and the related keys. Additionally SCP11-related personalization is added under processData.

## PE-SecurityDomain-SSD-7

```

ssdValue ProfileElement ::= securityDomain : {
  sd-Header {
    mandated NULL,
    identification 119
  },
  instance {
    applicationLoadPackageAID 'A0000001515350'H,
    classAID 'A000000151535041'H,
    instanceAID 'A00000055910100102736456616C7565'H,
    extraditeSecurityDomainAID 'A00000055910100102736456616C7565'H,
    applicationPrivileges '80C000'H,
    lifeCycleState '0F'H,
    -- SCP11 i='1D' (Secure messaging using S8 mode,
    SCP11c authorization mechanism not supported, SCP11c
    supported, Certificate chain supported, SD persistently
    stores PK.OCE,ECKA, SCP11b not supported, SCP11a supported)
    applicationSpecificParametersC9
    '810280008102111D8201F0'H,
    applicationParameters {
      uiccToolkitApplicationSpecificParametersField
      '01000101000002020112036C756500'H
    },
    processData {
      -- SCP11a ECKA Certificate

      '80E29000DCA60483021118BF2181D27F2181CE931073657269616C2D5
      343503131612D3031420A43412D4B4C43432D30315F200B73642D6F776
      E65722D3031950200805F2404209912314509434153442D303030317F4
      946B041041662512BF6D879856E2745A7B4CF192A9BC294C9D27F67E9D
      088B930A80F6D2D8C093826BD7BD03A929CEF453316D4EAFCB9C3E024A
      47817E60E0111D5A9799FF001005F37409E5397E8643F286493512635F
      3F518C0649679640A7BE32D4112DC5B9A8888FACC91611576ED9EFA2D5
      4BDA7CA5A0CC8E3831BE9AEF732F26E5A650A6794310'H,
      -- SCP11c ECKA Certificate

      '80E29000DCA60483021518BF2181D27F2181CE931073657269616C2D5
      343503131632D3031420A43412D4B4C43432D30315F200B73642D6F776
      E65722D3031950200805F2404209912314509434153442D303030317F4
      946B04104624598A6794988588C1F42973B63D508DE0A8BAF234438AC7
      F165CE91579CA4155AB9A481FA27141A6C683646A190C97B4F92317468
      1AEB8C7F4B319B69B729F001005F3740C17C963A71FB9A1419FAEAD13
      2A97A7E0CC57D4F1183F5E18F3AC8272FC3CF9628D84E14E39BAD26FA0
      CB39EFEBD2E1D781FCFE3CD92BE5B868B7B82AA99952B'H,
      -- CA-KLOC Identifier
      '80E2900012A610420A43412D4B4C4F432D303183021018'H,
      -- Whitelist

      '80E290002CA604830210187024931073657269616C2D4F43452D612D3
      03031931073657269616C2D4F43452D632D303031'H
    },
    controlReferenceTemplate {
      applicationProviderIdentifier
      '6F63652D6F776E65722D3031'H
    }
  },
  keyList {
    {
      keyUsageQualifier '38'H,
      keyAccess '00'H,
      keyIdentifier '01'H,
      keyVersionNumber '01'H,
      keyComponentents {
        {

```

```

        -- AES (16, 24 or 32 long keys)
        keyType '88'H,
        keyData '11223344556677881122334455667788'H
    }
},
{
    keyUsageQualifier '34'H,
    keyIdentifier '02'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 long keys)
            keyType '88'H,
            keyData '11223344556677881122334455667788'H
        }
    }
},
{
    keyUsageQualifier 'C8'H,
    keyAccess '00'H,
    keyIdentifier '03'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 long keys)
            keyType '88'H,
            keyData '11223344556677881122334455667788'H
        }
    }
},
{
    -- PK.CA-KLOC.ECDSA
    keyUsageQualifier '82'H,
    keyAccess '00'H,
    keyIdentifier '10'H,
    keyVersionNumber '18'H,
    keyComponents {
        {
            -- key value
            keyType 'B0'H,
            keyData
'04444DFE994D599551C6F65A41A43B1B33B342695867AE19641334D7E
A98033EDF47909F274E559F53EAB81B0B3C6FA504E1D2AC375E32DE7A6
95B066C2BE813FC'H
        },
        {
            -- NIST P-256 curve
            keyType 'F0'H,
            keyData '00'H
        }
    }
},
{
    -- SCP11a SK.SD.ECKA
    keyUsageQualifier '0080'H,
    keyAccess '00'H,
    keyIdentifier '11'H,
    keyVersionNumber '18'H,
    keyComponents {
        {
            -- key value

```

```

        keyType 'B1'H,
        keyData
'6BD4E1646F13C472095DFC2F4676998D7865EFC745A12B69D78C46B8B
49EB4FE'H
    },
    {
        -- NIST P-256 curve
        keyType 'F0'H,
        keyData '00'H
    }
},
{
    -- SCP11c SK.SD.ECKA
    keyUsageQualifier '0080'H,
    keyAccess '00'H,
    keyIdentifier '15'H,
    keyVersionNumber '18'H,
    keyComponents {
        {
            -- key value
            keyType 'B1'H,
            keyData
'C5C6D2564898273DE13CA17CC533FB3D757604386412ADB9853BF82FE
FE68A4C'H
        },
        {
            -- NIST P-256 curve
            keyType 'F0'H,
            keyData '00'H
        }
    }
},
    -- Security Domain Recognition Data with SCP80
    and SCP11 i='1D'
    sdPersoData {
        '00703F663D733B06072A864886FC6B01600B06092A864886FC6B02020
2630906072A864886FC6B03640B06092A864886FC6B048000640B06092
A864886FC6B04111D'H
    }
}

```

#### 6.14.11.10. PE-SecurityDomain-SSD-8

It is similar to PE-SecurityDomain-SSD-7 defined in 6.14.11.9, but adapted for SCP11 'i' = '3D'.

#### PE-SecurityDomain-SSD-8

```

ssdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 1110
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A00000055910100102736456616C7565'H,
    }
}

```

```

    extraditeSecurityDomainAID
0A00000055910100102736456616C7565'H,
    applicationPrivileges '80C000'H,
    lifeCycleState '0F'H,
    -- SCP11 i='3D' (Secure messaging using S8 mode,
SCP11c authorization mechanism supported, SCP11c supported,
Certificate chain supported, SD persistently stores
PK.OCE.ECKA, SCP11b not supported, SCP11a supported)
    applicationSpecificParametersC9
'810280008102113D8201F0'H,
    applicationParameters {
        uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
    },
    processData {
        -- SCP11a ECKA Certificate

'80E29000DCA60483021118BF2181D27F2181CE931073657269616C2D5
343503131612D3031420A43412D4B4C43432D30315F200B73642D6F776
E65722D3031950200805F2404209912314509434153442D303030317F4
946B041041662512BF6D879856E2745A7B4CF192A9BC294C9D27F67E9D
088B930A80F6D2D8C093826BD7BD03A929CEF453316D4EAFCEB9C3E024A
47817E60E0111D5A9799FF001005F37409E5397E8643F286493512635F
3F518C0649679640A7BE32D4112DC5B9A8888FACC91611576ED9EFA2D5
4BDA7CA5A0CC8EE3831BE9AEF732F26E5A650A6794310'H,
        -- SCP11c ECKA Certificate

'80E29000DCA60483021518BF2181D27F2181CE931073657269616C2D5
343503131612D3031420A43412D4B4C43432D30315F200B73642D6F776
E65722D3031950200805F2404209912314509434153442D303030317F4
946B04104624598A6794988588C1F42973B63D508DE0A8BAF234438AC7
F165CE91579CA4155AB9A481FA27141A6C683646A190C97B4F92317468
1AEBBC8C7F4B319B69B729F001005F3740C17C963A71FB9A1419FAEAD13
2A97A7E0CC57D4F1183F5E18F3AC8272FC3CF9628D84E14E39BAD26FA0
CB399EFEBD2E1D781FCFE3CD92BE5B868B7B82AA99952B'H,
        -- CA-KLOC Identifier
        '80E2900012A610420A43412D4B4C4F432D303183021018'H,
        -- Whitelist

'80E290002CA604830210187024931073657269616C2D4F43452D612D3
03031931073657269616C2D4F43452D632D303031'H
    },
    controlReferenceTemplate {
        applicationProviderIdentifier
'6F63652D6F776E65722D3031'H
    }
},
    keyList {
        {
            keyUsageQualifier '38'H,
            keyAccess '00'H,
            keyIdentifier '01'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    -- AES (16, 24 or 32 long keys)
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        },
        {
            keyUsageQualifier '34'H,
            keyIdentifier '02'H,
            keyVersionNumber '01'H,
            keyComponents {

```

```

    {
        -- AES (16, 24 or 32 long keys)
        keyType '88'H,
        keyData '11223344556677881122334455667788'H
    }
},
{
    keyUsageQualifier 'C8'H,
    keyAccess '00'H,
    keyIdentifier '03'H,
    keyVersionNumber '01'H,
    keyComponents {
        {
            -- AES (16, 24 or 32 long keys)
            keyType '88'H,
            keyData '11223344556677881122334455667788'H
        }
    }
},
{
    -- PK.CA-KLOC.ECDSA
    keyUsageQualifier '82'H,
    keyAccess '00'H,
    keyIdentifier '10'H,
    keyVersionNumber '18'H,
    keyComponents {
        {
            -- key value
            keyType 'B0'H,
            keyData
'04444DFE994D599551C6F65A41A43B1B33B342695867AE19641334D7E
A98033EDF47909F274E559F53EAB81B0B3C6FA504E1D2AC375E32DE7A6
95B066C2BE813FC'H
        },
        {
            -- NIST P-256 curve
            keyType 'F0'H,
            keyData '00'H
        }
    }
},
{
    -- SCP11a SK.SD.ECKA
    keyUsageQualifier '0080'H,
    keyAccess '00'H,
    keyIdentifier '11'H,
    keyVersionNumber '18'H,
    keyComponents {
        {
            -- key value
            keyType 'B1'H,
            keyData
'6BD4E1646F13C472095DFC2F4676998D7865EFC745A12B69D78C46B8B
49EB4FE'H
        },
        {
            -- NIST P-256 curve
            keyType 'F0'H,
            keyData '00'H
        }
    }
}

```

```

    },
    {
        -- SCP11c SK.SD.ECKA
        keyUsageQualifier '0080'H,
        keyAccess '00'H,
        keyIdentifier '15'H,
        keyVersionNumber '18'H,
        keyComponents {
            {
                -- key value
                keyType 'B1'H,
                keyData
                'C5C6D2564898273DE13CA17CC533FB3D757604386412ADB9853BF82FE
                FE68A4C'H
            },
            {
                -- NIST P-256 curve
                keyType 'F0'H,
                keyData '00'H
            }
        }
    }
},
    -- Security Domain Recognition Data with SCP80
    and SCP11 i='3D'
    sdPersoData {
        '00703F663D733B06072A864886FC6B01600B06092A864886FC6B02020
        2630906072A864886FC6B03640B06092A864886FC6B048000640B06092
        A864886FC6B04113D'H
    }
}

```

#### 6.14.11.11. PE-SecurityDomain-SSD-9

It is similar to PE-SecurityDomain-SSD-7 defined in 6.14.11.9, but adapted for SCP11 'i' = '5D'.

#### PE-SecurityDomain-SSD-9

```

ssdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 1111
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A00000055910100102736456616C7565'H,
        extraditeSecurityDomainAID
        A00000055910100102736456616C7565'H,
        applicationPrivileges '80C000'H,
        lifeCycleState '0F'H,
        -- SCP11 i='5D' (Secure messaging using S16 mode,
        SCP11c authorization mechanism not supported, SCP11c
        supported, Certificate chain supported, SD persistently
        stores PK.OCE.ECKA, SCP11b not supported, SCP11a supported)
        applicationSpecificParametersC9
        '810280008102115D8201F0'H,
        applicationParameters {

```

```

        uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
    },
    processData {
        -- SCP11a ECKA Certificate

'80E29000DCA60483021118BF2181D27F2181CE931073657269616C2D5
343503131612D3031420A43412D4B4C43432D30315F200B73642D6F776
E65722D3031950200805F2404209912314509434153442D303030317F4
946B041041662512BF6D879856E2745A7B4CF192A9BC294C9D27F67E9D
088B930A80F6D2D8C093826BD7BD03A929CEF453316D4EAFBCB9C3E024A
47817E60E0111D5A9799FF001005F37409E5397E8643F286493512635F
3F518C0649679640A7BE32D4112DC5B9A8888FACC91611576ED9EFA2D5
4BDA7CA5A0CC8EE3831BE9AEF732F26E5A650A6794310'H,

        -- SCP11c ECKA Certificate

'80E29000DCA60483021518BF2181D27F2181CE931073657269616C2D5
343503131632D3031420A43412D4B4C43432D30315F200B73642D6F776
E65722D3031950200805F2404209912314509434153442D303030317F4
946B04104624598A6794988588C1F42973B63D508DE0A8BAF234438AC7
F165CE91579CA4155AB9A481FA27141A6C683646A190C97B4F92317468
1AEB8C87F4B319B69B729F001005F3740C17C963A71FB9A1419FAEAD13
2A97A7E0CC57D4F1183F5E18F3AC8272FC3CF9628D84E14E39BAD26FA0
CB39EFEBD2E1D781FCFE3CD92BE5B868B7B82AA99952B'H,

        -- CA-KLOC Identifier
'80E2900012A610420A43412D4B4C4F432D303183021018'H,

        -- Whitelist

'80E290002CA604830210187024931073657269616C2D4F43452D612D3
03031931073657269616C2D4F43452D632D303031'H
    },
    controlReferenceTemplate {
        applicationProviderIdentifier
'6F63652D6F776E65722D3031'H
    }
},
keyList {
    {
        keyUsageQualifier '38'H,
        keyAccess '00'H,
        keyIdentifier '01'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                -- AES (16, 24 or 32 long keys)
                keyType '88'H,
                keyData '11223344556677881122334455667788'H
            }
        }
    },
    {
        keyUsageQualifier '34'H,
        keyIdentifier '02'H,
        keyVersionNumber '01'H,
        keyComponents {
            {
                -- AES (16, 24 or 32 long keys)
                keyType '88'H,
                keyData '11223344556677881122334455667788'H
            }
        }
    },
    {
        keyUsageQualifier 'C8'H,
        keyAccess '00'H,

```



```

keyIdentifier '03'H,
keyVersionNumber '01'H,
keyComponents {
  {
    -- AES (16, 24 or 32 long keys)
    keyType '88'H,
    keyData '11223344556677881122334455667788'H
  }
},
{
  -- PK.CA-KLOC.ECDSA
  keyUsageQualifier '82'H,
  keyAccess '00'H,
  keyIdentifier '10'H,
  keyVersionNumber '18'H,
  keyComponents {
    {
      -- key value
      keyType 'B0'H,
      keyData
'04444DFE994D599551C6F65A41A43B1B33B342695867AE19641334D7E
A98033EDF47909F274E559F53EAB81B0B3C6FA504E1D2AC375E32DE7A6
95B066C2BE813FC'H
    },
    {
      -- NIST P-256 curve
      keyType 'F0'H,
      keyData '00'H
    }
  }
},
{
  -- SCP11a SK.SD.ECKA
  keyUsageQualifier '0080'H,
  keyAccess '00'H,
  keyIdentifier '11'H,
  keyVersionNumber '18'H,
  keyComponents {
    {
      -- key value
      keyType 'B1'H,
      keyData
'6BD4E1646F13C472095DFC2F4676998D7865EFC745A12B69D78C46B8B
49EB4FE'H
    },
    {
      -- NIST P-256 curve
      keyType 'F0'H,
      keyData '00'H
    }
  }
},
{
  -- SCP11c SK.SD.ECKA
  keyUsageQualifier '0080'H,
  keyAccess '00'H,
  keyIdentifier '15'H,
  keyVersionNumber '18'H,
  keyComponents {
    {
      -- key value

```

```

        keyType 'B1'H,
        keyData
'C5C6D2564898273DE13CA17CC533FB3D757604386412ADB9853BF82FE
FE68A4C'H
    },
    {
        -- NIST P-256 curve
        keyType 'F0'H,
        keyData '00'H
    }
}
},
    -- Security Domain Recognition Data with SCP80
and SCP11 i='5D'
    sdPersoData {
        '00703F663D733B06072A864886FC6B01600B06092A864886FC6B02020
2630906072A864886FC6B03640B06092A864886FC6B048000640B06092
A864886FC6B04115D'H
    }
}

```

#### 6.14.11.12. PE-SecurityDomain-SSD-10

Compared to PE-SecurityDomain-SSD-1 defined in 6.14.10.1, the instance definition is extended by the cumulativeGrantedVolatileMemory and cumulativeGrantedNonVolatileMemory tags.

#### PE-SecurityDomain-SSD-10

```

ssdValue ProfileElement ::= securityDomain : {
    sd-Header {
        mandated NULL,
        identification 1112
    },
    instance {
        applicationLoadPackageAID 'A0000001515350'H,
        classAID 'A000000151535041'H,
        instanceAID 'A00000055910100102736456616C7565'H,
        applicationPrivileges '808000'H,
        lifeCycleState '0F'H,
        applicationSpecificParametersSC9 '810280008201F0'H,
        systemSpecificParameters {
            cumulativeGrantedVolatileMemory '1000'H
            cumulativeGrantedNonVolatileMemory '1000'H
        },
        applicationParameters {
            uiccToolkitApplicationSpecificParametersField
'01000101000002020112036C756500'H
        }
    },
    keyList {
        {
            keyUsageQualifier '38'H,
            keyAccess '00'H,
            keyIdentifier '01'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        },
        {
            keyUsageQualifier '34'H,
            -- keyAccess '00'H,
            keyIdentifier '02'H,

```

```

        keyVersionNumber '01'H,
        keyComponents {
            {
                keyType '88'H,
                keyData '11223344556677881122334455667788'H
            }
        },
        {
            keyUsageQualifier 'C8'H,
            keyAccess '00'H,
            keyIdentifier '03'H,
            keyVersionNumber '01'H,
            keyComponents {
                {
                    keyType '88'H,
                    keyData '11223344556677881122334455667788'H
                }
            }
        }
    }
}

```

### 6.14.12 PE-Application

#### 6.14.12.1. PE-Application-1

#### PE-Application-1

```

appletValue ProfileElement ::= application : {
    app-Header {
        mandated NULL,
        identification 121
    },
    loadBlock {
        loadPackageAID 'A000000559101001'H,
        -- Java file for the applet1

        loadBlockObject
        '010012DECAFFED010204000108A00000055910100102001F0012001F0
        00F002800220019004F000A000C0000007E00000000000003010004002
        803040107A0000000620101000110A000000090005FFFFFFFFF8912000
        000000107A000000062000103000F010BA000000559101001112233000
        806001942800300FF00050400000033FFFFF00300040800200810801080
        7004F000110188C00007A04328F00013D8C00022E181D2529041604610
        81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
        B071967041877017700207A02108D0006058E020007007A08000A00000
        000000000000000500220008068003000100000006000001038003010
        380030206000043068110000181090009000C000000080506040E0C041
        9050B007E0100010000020000000680028108008100010012000500000
        00001090008001400260000000007010030001B000100000000501003
        3001F000B00000000080100400026000100000000FF0200430012000A0
        000000000080012FFFF00120012001400120017FFFF011004B43105681
        090066800A10B6800636800200241'H
    },
    instanceList {
        {
            applicationLoadPackageAID 'A000000559101001'H,
            classAID 'A000000559101001112233'H,
            instanceAID 'A00000055910100111223301'H,
            applicationPrivileges '000000'H,
            applicationSpecificParametersC9 '00'H,
            applicationParameters {
                uiccToolkitApplicationSpecificParametersField
                -- TAR: 112233
                '01000101000000000311223300'H
            }
        }
    }
}

```

```

    }
  }
}

```

### 6.14.12.2. PE-Application-2

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application has all elements for LoadBlock except `hashValue`.

#### PE-APPLICATION-2

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 122
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    securityDomainAID 'A000000151000000'H,
    nonVolatileCodeLimitC6 '0000'H,
    volatileDataLimitC7 '000FFFFF'H,
    nonVolatileDataLimitC8 '0000'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001
    F000F002800220019004F000A000C00000007E00000000000000301000
    4002803040107A00000000620101000110A0000000090005FFFFFFFFF8
    912000000000107A000000062000103000F010BA0000005591010011
    12233000806001942800300FF00050400000033FFFFF0030004080020
    08108010807004F000110188C00007A04328F00013D8C00022E181D2
    52904160461081B8B0003700C1B181D044116048B00041B8C00057A0
    0207A02301E046B071967041877017700207A02108D0006058E02000
    7007A08000A0000000000000000000000500220008068003000100000
    006000001038003010380030206000043068110000181090009000C0
    00000080506040E0C0419050B007E010001000002000000068002810
    80081000100120005000000000109000800140026000000000701003
    0001B00010000000005010033001F000B00000000080100400026000
    100000000FF0200430012000A0000000000080012FFFFF00120012001
    400120017FFFF011004B43105681090066800A10B680063680020024
    1'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100211223301'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H
      }
    }
  }
}

```

### 6.14.12.3. PE-Application-3

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application contains all elements in ApplicationInstance.

#### PE-APPLICATION-3

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 123
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001
    F000F002800220019004F000A000C0000007E0000000000000301000
    4002803040107A0000000620101000110A0000000090005FFFFFFF8
    912000000000107A000000062000103000F010BA0000005591010011
    12233000806001942800300FF00050400000033FFFF0030004080020
    08108010807004F000110188C00007A04328F00013D8C00022E181D2
    52904160461081B8B0003700C1B181D044116048B00041B8C00057A0
    0207A02301E046B071967041877017700207A02108D0006058E02000
    7007A08000A000000000000000000000500220008068003000100000
    0060000001038003010380030206000043068110000181090009000C0
    00000080506040E0C0419050B007E010001000002000000068002810
    80081000100120005000000000109000800140026000000000701003
    0001B000100000000005010033001F000B000000000080100400026000
    100000000FF0200430012000A0000000000080012FFFF00120012001
    400120017FFFF011004B43105681090066800A10B680063680020024
    1'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100113223301'H,
      extraditeSecurityDomainAID '
      A00000055910100102736456616C7565'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {

        implicitSelectionParameter '41'H      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H,
        uiccAccessApplicationSpecificParametersField
        '00010000'H,
        uiccAdministrativeAccessApplicationSpecificParametersFie
        ld '00010000'H
      }
    }
  }
}

```

#### 6.14.12.4. PE-Application-4

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application contains a bad library.

#### PE-APPLICATION-4

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 124
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file based on the applet1 with AID
    modified in the LoadBlockObject to use a non-existing
    library. The AID of javacard.framework was changed from
    "A0_00_00_00_62_01_01" to "A0_10_00_00_62_01_01".
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001
    F000F002800220019004F000A000C0000007E0000000000000301000
    4002803040107A0100000620101000110A0000000090005FFFFFFF8
    912000000000107A000000062000103000F010BA0000005591010011
    12233000806001942800300FF00050400000033FFFF0030004080020
    08108010807004F000110188C00007A04328F00013D8C00022E181D2
    52904160461081B8B0003700C1B181D044116048B00041B8C00057A0
    0207A02301E046B071967041877017700207A02108D0006058E02000
    7007A08000A00000000000000000000500220008068003000100000
    0060000001038003010380030206000043068110000181090009000C0
    00000080506040E0C0419050B007E010001000002000000068002810
    80081000100120005000000000109000800140026000000000701003
    0001B00010000000005010033001F000B00000000080100400026000
    100000000FF0200430012000A0000000000080012FFFF00120012001
    400120017FFFF011004B43105681090066800A10B680063680020024
    1'H
  }
}

```

### 6.14.12.5. PE-Application-5

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application contains multiple instances.

#### PE-APPLICATION-5

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 125
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001
    F000F002800220019004F000A000C0000007E0000000000000301000
    4002803040107A0000000620101000110A0000000090005FFFFFFF8
    912000000000107A000000062000103000F010BA0000005591010011
    12233000806001942800300FF00050400000033FFFF0030004080020
    08108010807004F000110188C00007A04328F00013D8C00022E181D2
    52904160461081B8B0003700C1B181D044116048B00041B8C00057A0
    0207A02301E046B071967041877017700207A02108D0006058E02000
    7007A08000A00000000000000000000500220008068003000100000
    006000001038003010380030206000043068110000181090009000C0
    0000080506040E0C0419050B007E010001000002000000068002810
    8008100010012000500000000010900080014002600000000701003
    0001B00010000000005010033001F000B00000000080100400026000
    100000000FF0200430012000A0000000000080012FFFF00120012001
    400120017FFFF011004B43105681090066800A10B680063680020024
    1'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100544556601'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H
      }
    },
    -- Second Instance
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100544556602'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000344556600'H
      }
    }
  }
}

```

### 6.14.12.6. PE-Application-6

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application contains the processData element.

#### PE-APPLICATION-6

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 126
  },
  loadBlock {
    loadPackageAID 'A000000559101002'H,
    -- Java file for the applet2
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100202001F0012001F0
00F00440062001F0161000C002C000000E900020000000005010004004
405040107A0000000620101000110A0000000090005FFFFFFFFF8912000
000020106A00000015100010110A0000000871005FFFFFFFFF891320000
0000107A000000062000103000F010BA00000055910100211223300180
6001F438003020002050500000080FFFF0040008D00DE8002008108010
882080109070161000210188C000218110100900B870018110100900B8
7017A04328F00033D8C00042E181D252904160461081B8B0005700C1B1
81D044116048B00061B8C00077A04220331188B000860037A198B00092
E1B04257500120001FFCA0009181B038C000A317008116D008D000B198
B000C3B191E08438B000D19081E08438B000E7A02301E046B071967041
8770177052303311D056B3E8D000F2E1B1B8E01001013AD01031B8E010
010148E050010063B18AD01038C000A318D001128041504AD01081E084
38E0400120E1504048E020012177A02108D0013058E020014007A07621
E084105412906191E08418D0015290716077D00166B2B19160625026B0
55906015906011916062510926B16191606AD000319160604412505418
D00173B0378116A808D000B037806310332191E05418D00151100926B2
3AD0003256015AD0003191E0841AD00042505418D0017327010116A888
D000B7008116A888D000B1F7808000C000200000000000000020070050
0620018020000000200000106800300010000000600000103800301038
00302060000D20380030303800A01060001280680070103800A0703800
A0903800A04068303000183010006810F0001810400068110000181090
006801004050000000680100109002C00090E088B100E51290607001F0
516040E0C04090713090408081907090509040E080705120728090D1B0
9080B00E901000100000300030008800281088208FF0A0000008004000
2000000003201020000010032008100010034001500000000010900180
036002600000000070100400055003E00000000050100800059000B000
000000801008D003E004300000000FF0200D20034000A0000000009010
0DE0060004800000000FF020128003B003700000000001800320032003
4FFFF003400340036003400390032003B003E0040003E00420045FFFF0
049FFFF004DFFFF003B0040005101B0011004B431012003B4400241014
003441005683010056810400568109006B4B444066800A10B680063680
02006B44B44'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101002'H,
      classAID 'A000000559101002112233'H,
      instanceAID 'A00000055910100211223306'H,
      applicationPrivileges '000000'H,

      applicationSpecificParametersC9 '00'H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
          '01000101000000000311223300'H
      },
      processData {

```



```

        '80E2880009007006920411223344'H
    }
}
}
}

```

#### 6.14.12.7. PE-Application-7

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application is not mandatory.

#### PE-APPLICATION-7

```

appletValue ProfileElement ::= application : {
  app-Header {
    identification 127
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    securityDomainAID 'A000000151000000'H,
    nonVolatileCodeLimitC6 '0000'H,
    volatileDataLimitC7 '000FFFFF'H,
    nonVolatileDataLimitC8 '0000'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001
    F000F002800220019004F000A000C0000007E0000000000000301000
    4002803040107A0000000620101000110A0000000090005FFFFFFF8
    912000000000107A000000062000103000F010BA0000005591010011
    12233000806001942800300FF000504000000033FFFFF0030004080020
    08108010807004F000110188C00007A04328F00013D8C00022E181D2
    52904160461081B8B0003700C1B181D044116048B00041B8C00057A0
    0207A02301E046B071967041877017700207A02108D0006058E02000
    7007A08000A000000000000000000000500220008068003000100000
    006000001038003010380030206000043068110000181090009000C0
    0000080506040E0C0419050B007E010001000002000000068002810
    8008100010012000500000000010900080014002600000000701003
    0001B00010000000005010033001F000B00000000080100400026000
    100000000FF0200430012000A0000000000080012FFFFF00120012001
    400120017FFFF011004B43105681090066800A10B680063680020024
    1'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100211223301'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H
      }
    }
  }
}

```

6.14.12.8. PE-Application-8

PE-Application with loadBlockObject only.

**PE-APPLICATION-8**

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 128
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001F0
    00F002800220019004F000A000C0000007E00000000000003010004002
    803040107A0000000620101000110A0000000090005FFFFFFFFF8912000
    000000107A000000062000103000F010BA000000559101001112233000
    806001942800300FF00050400000033FFFFF00300040800200810801080
    7004F000110188C00007A04328F00013D8C00022E181D2529041604610
    81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
    B071967041877017700207A02108D0006058E020007007A08000A00000
    0000000000000000500220008068003000100000006000001038003010
    380030206000043068110000181090009000C000000080506040E0C041
    9050B007E0100010000020000000680028108008100010012000500000
    00001090008001400260000000007010030001B0001000000000501003
    3001F000B00000000080100400026000100000000FF0200430012000A0
    000000000080012FFFF00120012001400120017FFFF011004B43105681
    090066800A10B6800636800200241'H
  }
}

```

### 6.14.12.9. PE-Application-9

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application contains tags volatileMemoryQuotaC7 and nonVolatileMemoryQuotaC8.

#### PE-APPLICATION-9

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 129
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001
    F000F002800220019004F000A000C0000007E00000000000000301000
    4002803040107A0000000620101000110A0000000090005FFFFFFF8
    912000000000107A000000062000103000F010BA0000005591010011
    12233000806001942800300FF00050400000033FFFFF0030004080020
    08108010807004F000110188C00007A04328F00013D8C00022E181D2
    52904160461081B8B0003700C1B181D044116048B00041B8C00057A0
    0207A02301E046B071967041877017700207A02108D0006058E02000
    7007A08000A000000000000000000000500220008068003000100000
    006000001038003010380030206000043068110000181090009000C0
    00000080506040E0C0419050B007E010001000002000000068002810
    80081000100120005000000000109000800140026000000000701003
    0001B00010000000005010033001F000B000000000080100400026000
    100000000FF0200430012000A00000000000080012FFFF00120012001
    400120017FFFF011004B43105681090066800A10B680063680020024
    1'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100113223301'H,
      extraditeSecurityDomainAID '
      A00000055910100102736456616C7565'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        volatileMemoryQuotaC7 '0200'H,
        nonVolatileMemoryQuotaC8 '0200'H
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H,
        uiccAccessApplicationSpecificParametersField
        '00010000'H,
        uiccAdministrativeAccessApplicationSpecificParametersFie
        ld '00010000'H
      }
    }
  }
}

```

### 6.14.12.10. PE-Application-10

Compared to PE-Application-1 defined in 6.14.12.1, this PE Application contains `userInteractionContactlessParameters`.

#### PE-APPLICATION-10

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1210
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001F0
    00F002800220019004F000A000C0000007E00000000000003010004002
    803040107A0000000620101000110A0000000090005FFFFFFFFF8912000
    000000107A000000062000103000F010BA000000559101001112233000
    806001942800300FF00050400000033FFFF00300040800200810801080
    7004F000110188C00007A04328F00013D8C00022E181D2529041604610
    81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
    B071967041877017700207A02108D0006058E020007007A08000A00000
    000000000000000500220008068003000100000006000001038003010
    380030206000043068110000181090009000C000000080506040E0C041
    9050B007E0100010000020000000680028108008100010012000500000
    00001090008001400260000000007010030001B0001000000000501003
    3001F000B00000000080100400026000100000000FF0200430012000A0
    000000000080012FFFFF00120012001400120017FFFF011004B43105681
    090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100113223301'H,
      extraditeSecurityDomainAID
      'A00000055910100102736456616C7565'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        implicitSelectionParameter '41'H,
        userInteractionContactlessParameters
        '7F20395F5004AABBCCDD6D285F44200123456789ABCDEF0123456789A
        BCDEF0123456789ABCDEF0123456789ABCDEF67035301015F450501435
        2454CA620DDAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAAA
        AAAAAAAAAAAAAABB8701FA880101'H
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H,
        uiccAccessApplicationSpecificParametersField
        '00010000'H,
        uiccAdministrativeAccessApplicationSpecificParametersField
        '00010000'H
      }
    }
  }
}

```

### 6.14.12.11. PE-Application-11

Compared to PE-Application-3 defined in 6.14.12.3, this PE Application contains the contactlessProtocolParameters with Type A Protocol.

#### PE-APPLICATION-11

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1211
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001F0
    00F002800220019004F000A000C0000007E00000000000003010004002
    803040107A0000000620101000110A0000000090005FFFFFFF8912000
    000000107A000000062000103000F010BA000000559101001112233000
    806001942800300FF00050400000033FFFFF00300040800200810801080
    7004F000110188C00007A04328F00013D8C00022E181D2529041604610
    81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
    B071967041877017700207A02108D0006058E020007007A08000A00000
    000000000000000500220008068003000100000006000001038003010
    380030206000043068110000181090009000C000000080506040E0C041
    9050B007E0100010000020000000680028108008100010012000500000
    000010900080014002600000000007010030001B0001000000000501003
    3001F000B000000000080100400026000100000000FF0200430012000A0
    00000000080012FFFFF00120012001400120017FFFF011004B43105681
    090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100113223301'H,
      extraditeSecurityDomainAID
      'A00000055910100102736456616C7565'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        implicitSelectionParameter '41'H,
        contactlessProtocolParameters '810100800181'H
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H,
        uiccAccessApplicationSpecificParametersField
        '00010000'H,
        uiccAdministrativeAccessApplicationSpecificParametersField
        '00010000'H
      }
    }
  }
}

```

### 6.14.12.12. PE-Application-12

Compared to PE-Application-1 defined in 6.14.12.1 this PE Application contains the hash of the Load File Data Block calculated with SHA-1.

#### PE- Application-12

```
value1 ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1212
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    hashValue 'D6349C09E6A7C93D81F6E2D439D466774747E9A0'H,
-- Java file for the applet1
    loadBlockObject
'010012DECAFFED010204000108A00000055910100102001F0012001F0
00F002800220019004F000A000C00000007E00000000000003010004002
803040107A0000000620101000110A0000000090005FFFFFFFFF8912000
000000107A000000062000103000F010BA000000559101001112233000
806001942800300FF00050400000033FFFFF00300040800200810801080
7004F000110188C00007A04328F00013D8C00022E181D2529041604610
81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
B071967041877017700207A02108D0006058E020007007A08000A00000
000000000000000500220008068003000100000006000001038003010
380030206000043068110000181090009000C000000080506040E0C041
9050B007E0100010000020000000680028108008100010012000500000
00001090008001400260000000007010030001B0001000000000501003
3001F000B00000000080100400026000100000000FF0200430012000A0
000000000080012FFFFF00120012001400120017FFFFF011004B43105681
090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100111223301'H,
      applicationPrivileges '000000'H,
      lifeCycleState '07'H,
      applicationSpecificParametersC9 '00'H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
'010001010000000000311223300'H
      }
    }
  }
}
```

### 6.14.12.13. PE-Application-13

Compared to PE-Application-1 defined in 6.14.12.1 this PE Application contains the *ts102226AdditionalContactlessParameters* (systemSpecificParameters) with reader mode protocol data Type A.

#### PE- Application-13

```
value1 ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1213
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
-- Java file for the applet1
    loadBlockObject
'010012DECAFFED010204000108A00000055910100102001F0012001F0
00F002800220019004F000A000C0000007E00000000000003010004002
803040107A0000000620101000110A0000000090005FFFFFFFFF8912000
000000107A000000062000103000F010BA000000559101001112233000
806001942800300FF00050400000033FFFFF00300040800200810801080
7004F000110188C00007A04328F00013D8C00022E181D2529041604610
81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
B071967041877017700207A02108D0006058E020007007A08000A00000
000000000000000500220008068003000100000006000001038003010
380030206000043068110000181090009000C000000080506040E0C041
9050B007E0100010000020000000680028108008100010012000500000
00001090008001400260000000007010030001B0001000000000501003
3001F000B00000000080100400026000100000000FF0200430012000A0
000000000080012FFFF00120012001400120017FFFF011004B43105681
090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100E11223301'H,
      applicationPrivileges '000000'H,
      lifeCycleState '07'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        implicitSelectionParameter '41'H,
        ts102226AdditionalContactlessParameters {
          protocolParameterData '860100'H
        }
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
'010001010000000000311223300'H
      }
    }
  }
}
```

#### 6.14.12.14. PE-Application-14

Compared to PE-Application-1 defined in 6.14.12.1 this PE Application contains applet4 (sim.toolkit applet) instead of applet1 and the ts102226SIMFileAccessToolkitParameter (systemSpecificParameters) instead of uiccToolkitApplicationSpecificParametersField (applicationParameters).

#### PE- Application-14

```
value1 ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1214
  },
  loadBlock {
    loadPackageAID ' A000000559101004'H,
-- Java file for the applet4
    loadBlockObject
'010012decaffed010204000108a00000055910100402001f0012001f0
00f002800360019008b00280017000000b000060003001503010004002
803040107a0000000620101060210a0000000090003fffffffff8910710
002000107a000000062000103000f010ba000000559101004112233000
806001942800300ff00050400000037ffff00340044800200810101080
7008b000110188c00007a04328f00013d8c00022e181d2529041604610
81b8b0003700c1b181d044116048b00041b8c00051b8c00067a00207a0
2301e046b071967041877017700207a02108d0007058b00087a08118d0
0072c197b0009037b000992030303038b000a3b197b000b037b000b920
30303038b000a3b197b000c037b000c92030303038b000a3b7a0800280
00600030003030007656e7472792031030007656e74727920320300076
56e747279203300000000050036000d068003000100000006000001038
0030103800302060000470600005106810900038109090500000003810
90b0500000205000004090017000000130506040e0c040419040605040
80504080504080b00b00100010000020003000780028101ff1a0000000
027ff1a0000020027ff1a000004002700810001001c000500000000010
90008001e002a0000000007010034002e0001000000000501003700320
00b00000000080100440025000100000000ff020047001c00080000000
0ff020051001c003800000000000d001cffff001c001c001e001c001c0
02100250027002900270027011004b43105681090023101b008b443234
3066800a10b680063680020'H
  },
  instanceList {
    {
      applicationLoadPackageAID ' A000000559101004'H,
      classAID ' A000000559101004112233'H,
      instanceAID ' A00000055910100411223301'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 ''H,
      systemSpecificParameters {
        ts102226SIMFileAccessToolkitParameter
'010001000A03010202030305000003555555'H
      }
    }
  }
}
```



### 6.14.12.15. PE-Application-15

Compared to PE-Application-1 defined in 6.14.12.1 this PE Application contains applet3 (uicc.toolkit applet) instead of applet1 and modified uiccToolkitApplicationSpecificParametersField (applicationParameters)

#### PE- Application-15

```
value1 ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1215
  },
  loadBlock {
    loadPackageAID 'A000000559101003'H,
-- Java file for the applet3
    loadBlockObject
'010012decaffed010204000108a00000055910100302001f0012001f0
00f002800320019009300280017000000a900060003001503010004002
803040107a0000000620101000110a0000000090005fffffffff8912000
000000107a000000062000103000f010ba000000559101003112233000
806001942800300ff00050400000037ffff00340044800200810801080
70093000110188c00007a04328f00013d8c00022e181d2529041604610
81b8b0003700c1b181d044116048b00041b8c00051b8c00067a00207a0
2301e046b071967041877017700207a02108d0007058e020008007a081
18d00072c197b0009037b000992030303038e080008063b197b000a037
b000a92030303038e080008063b197b000b037b000b92030303038e080
008063b7a080028000600030003030007656e7472792031030007656e7
472792032030007656e747279203300000000050032000c06800300010
0000006000001038003010380030206000047060000530681100001810
900050000000500000205000004090017000000130506040e0c0404190
5070504090604090604090b00a90100010000020003000780028108ff1
a0000000023ff1a0000020023ff1a000004002300810001001a0005000
0000001090008001c002a0000000007010034002500010000000005010
0370029000b00000000080100440030000100000000ff020047001a000
a00000000ff020053001a003e00000000000c001affff001a001a001c0
01a001a001fffff002300230023011004b4310568109001b0066800a10
b6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101003'H,
      classAID 'A000000559101003112233'H,
      instanceAID 'A00000055910100311223301'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 ''H,
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
'01000A0301020203030500000355555500'H,
        uiccAccessApplicationSpecificParametersField
'00010000'H,
      }
    }
  }
}
```

### 6.14.12.16. PE-Application-16

Compared to PE-Application-3 defined in 6.14.12.3, this PE Application contains the contactlessProtocolParameters with Type B Protocol.

#### PE-APPLICATION-16

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1216
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001F0
    00F002800220019004F000A000C0000007E00000000000003010004002
    803040107A0000000620101000110A0000000090005FFFFFFFFF8912000
    000000107A000000062000103000F010BA000000559101001112233000
    806001942800300FF000504000000033FFFFF00300040800200810801080
    7004F000110188C00007A04328F00013D8C00022E181D2529041604610
    81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
    B071967041877017700207A02108D0006058E020007007A08000A00000
    000000000000000500220008068003000100000006000001038003010
    380030206000043068110000181090009000C000000080506040E0C041
    9050B007E0100010000020000000680028108008100010012000500000
    000010900080014002600000000007010030001B0001000000000501003
    3001F000B000000000080100400026000100000000FF0200430012000A0
    000000000080012FFFFF00120012001400120017FFFFF011004B43105681
    090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100113223301'H,
      extraditeSecurityDomainAID
      'A00000055910100102736456616C7565'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        implicitSelectionParameter '41'H,
        contactlessProtocolParameters '810100800182'H
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '010001010000000000311223300'H,
        uiccAccessApplicationSpecificParametersField
        '00010000'H,
        uiccAdministrativeAccessApplicationSpecificParametersField
        '00010000'H
      }
    }
  }
}

```

### 6.14.12.17. PE-Application-17

Compared to PE-Application-3 defined in 6.14.12.3, this PE Application contains the contactlessProtocolParameters with Type F Protocol.

#### PE-APPLICATION-17

```

appletValue ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1217
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
    -- Java file for the applet1
    loadBlockObject
    '010012DECAFFED010204000108A00000055910100102001F0012001F0
    00F002800220019004F000A000C0000007E00000000000003010004002
    803040107A0000000620101000110A0000000090005FFFFFFF8912000
    000000107A000000062000103000F010BA000000559101001112233000
    806001942800300FF00050400000033FFFFF00300040800200810801080
    7004F000110188C00007A04328F00013D8C00022E181D2529041604610
    81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
    B071967041877017700207A02108D0006058E020007007A08000A00000
    000000000000000500220008068003000100000006000001038003010
    380030206000043068110000181090009000C000000080506040E0C041
    9050B007E0100010000020000000680028108008100010012000500000
    000010900080014002600000000007010030001B0001000000000501003
    3001F000B00000000080100400026000100000000FF0200430012000A0
    00000000080012FFFFF00120012001400120017FFFF011004B43105681
    090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100113223301'H,
      extraditeSecurityDomainAID
      'A00000055910100102736456616C7565'H,
      applicationPrivileges '000000'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        implicitSelectionParameter '41'H,
        contactlessProtocolParameters '810100800184'H
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
        '01000101000000000311223300'H,
        uiccAccessApplicationSpecificParametersField
        '00010000'H,
        uiccAdministrativeAccessApplicationSpecificParametersField
        '00010000'H
      }
    }
  }
}

```

### 6.14.12.18. PE-Application-18

Compared to PE-Application-1 defined in 6.14.12.1 this PE Application contains the *ts102226AdditionalContactlessParameters* (systemSpecificParameters) with reader mode protocol data Type B.

#### PE- Application-18

```
value1 ProfileElement ::= application : {
  app-Header {
    mandated NULL,
    identification 1218
  },
  loadBlock {
    loadPackageAID 'A000000559101001'H,
-- Java file for the applet1
    loadBlockObject
'010012DECAFFED010204000108A00000055910100102001F0012001F0
00F002800220019004F000A000C0000007E00000000000003010004002
803040107A0000000620101000110A0000000090005FFFFFFFFF8912000
000000107A000000062000103000F010BA000000559101001112233000
806001942800300FF00050400000033FFFF00300040800200810801080
7004F000110188C00007A04328F00013D8C00022E181D2529041604610
81B8B0003700C1B181D044116048B00041B8C00057A00207A02301E046
B071967041877017700207A02108D0006058E020007007A08000A00000
000000000000000500220008068003000100000006000001038003010
380030206000043068110000181090009000C000000080506040E0C041
9050B007E0100010000020000000680028108008100010012000500000
00001090008001400260000000007010030001B0001000000000501003
3001F000B000000000080100400026000100000000FF0200430012000A0
000000000080012FFFF00120012001400120017FFFF011004B43105681
090066800A10B6800636800200241'H
  },
  instanceList {
    {
      applicationLoadPackageAID 'A000000559101001'H,
      classAID 'A000000559101001112233'H,
      instanceAID 'A00000055910100E11223301'H,
      applicationPrivileges '000000'H,
      lifeCycleState '07'H,
      applicationSpecificParametersC9 '00'H,
      systemSpecificParameters {
        implicitSelectionParameter '41'H,
        ts102226AdditionalContactlessParameters {
          protocolParameterData '87020000'H
        }
      },
      applicationParameters {
        uiccToolkitApplicationSpecificParametersField
'010001010000000000311223300'H
      }
    }
  }
}
```

### 6.14.13 PE-RFM

#### 6.14.13.1. PE-RFM-1

The RFM instance is associated to USIM ADF.

##### PE-RFM-1

```
rfmValue ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 131
  },
  instanceAID 'A00000055910100001'H,
  tarList {
    'B00000'H
  },
  minimumSecurityLevel '12'H,
  uiccAccessDomain '00'H,
  uiccAdminAccessDomain '00'H,
  adfRFMAccess {
    adfAID 'A0000000871002FF33FF018900000100'H,
    adfAccessDomain '00'H,
    adfAdminAccessDomain '00'H
  }
}
```

#### 6.14.13.2. PE-RFM-2

The RFM instance is not associated to any ADF.

##### PE-RFM-2

```
rfmValue ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 132
  },
  instanceAID 'A00000055910100002'H,
  tarList {
    'B00002'H
  },
  minimumSecurityLevel '12'H,
  uiccAccessDomain '00'H,
  uiccAdminAccessDomain '00'H
}
```

#### 6.14.13.3. PE-RFM-ISIM

The RFM instance is associated to ISIM ADF.

##### PE-RFM-ISIM

```
iSIMrfmValue ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 133
  },
```

```

instanceAID 'A00000055910100003'H,
tarList {
  'B00140'H
},
minimumSecurityLevel '12'H,
uiccAccessDomain '00'H,
uiccAdminAccessDomain '00'H,
adfRFMAccess {
  adfAID 'A0000000871004FF33FF018900000100'H,
  adfAccessDomain '00'H,
  adfAdminAccessDomain '00'H
}
}

```

#### 6.14.13.4. PE-RFM-CSIM

The RFM instance is associated to CSIM ADF.

#### PE-RFM-CSIM

```

cSIMrfmValue ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 134
  },
  instanceAID 'A00000055910100005'H,
  tarList {
    'B00150'H
  },
  minimumSecurityLevel '12'H,
  uiccAccessDomain '00'H,
  uiccAdminAccessDomain '00'H,
  adfRFMAccess {
    adfAID 'A0000003431002FF33FF018900000100'H,
    adfAccessDomain '00'H,
    adfAdminAccessDomain '00'H
  }
}

```

#### 6.14.13.5. PE-RFM-3

Compared to PE-RFM-2 defined in 6.14.13.2, the RFM instance is associated to SSD1 as defined in 6.14.11.1.

##### PE-RFM-3

```
rfmValue ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 135
  },
  instanceAID 'A00000055910100002'H,
  securityDomainAID 'A00000055910100102736456616C7565'H,
  tarList {
    'B00003'H
  },
  minimumSecurityLevel '12'H,
  uiccAccessDomain '00'H,
  uiccAdminAccessDomain '00'H
}
```

#### 6.14.13.6. PE-RFM-4

The RFM instance is associated to USIM ADF 6.14.5.1.9 PE-USIM-by-Template-7.

##### PE-RFM-4

```
value1 ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 136
  },
  instanceAID 'A00000055910100003'H,
  tarList {
    'B00001'H
  },
  minimumSecurityLevel '12'H,
  uiccAccessDomain '00'H,
  uiccAdminAccessDomain '00'H,
  adfRFMAccess {
    adfAID 'A00000008710020000000000000000200'H,
    adfAccessDomain '00'H,
    adfAdminAccessDomain '00'H
  }
}
```

#### 6.14.13.7. PE-RFM-5

The RFM instance is associated to USIM ADF with non-IMSI SUPI type.

##### PE-RFM-5

```
rfmValue ProfileElement ::= rfm : {
  rfm-header {
    mandated NULL,
    identification 137
  },
```

```

instanceAID 'A00000055910100001'H,
tarList {
  'B00005'H
},
minimumSecurityLevel '12'H,
uiccAccessDomain '00'H,
uiccAdminAccessDomain '00'H,
adfRFMAccess {
  adfAID 'A000000087100BFF33FF018900000100'H,
  adfAccessDomain '00'H,
  adfAdminAccessDomain '00'H
}
}

```

#### 6.14.14 PE-End

##### 6.14.14.1. PE-END-1

#### PE-END-1

```

endValue ProfileElement ::= end : {
  end-header {
    mandated NULL,
    identification 999
  }
}

```

#### 6.14.15 PE-NonStandard

##### 6.14.15.1. PE-NonStandard-1

This PE is not mandated.

#### PE-NonStandard-1

```

nonStdValue ProfileElement ::= nonStandard : {
  nonStandard-header {
    identification 151
  },
  issuerID { 2 999 1 },
  content '0102030405060708090A0B0C0D0E0F'H
}

```

##### 6.14.15.2. PE-NonStandard-2

This PE is mandated.

#### PE-NonStandard-2

```

nonStdValue ProfileElement ::= nonStandard : {
  nonStandard-header {
    mandated NULL,
    identification 152
  },
  issuerID { 2 999 1 },
  content '0102030405060708090A0B0C0D0E0F'H
}

```



### 6.14.16 IoT Minimal Profile Header

#### 6.14.16.1. [IoT-Minimal-Profile-Header-1](#)

It contains pix for IMSI SUPI type

##### IoT-Minimal-Profile-Header-1

```
ioheaderValue ProfileElement ::= header : {
    major-version 3,
    minor-version 3,
    iccid '89019990001234567893'H,
    eUICC-Mandatory-services {
    },
    eUICC-Mandatory-GFSTEList {
    },
    iotOptions {
-- pix of the USIM AID for IMSI SUPI type
        pix '1002FF33FF018900000100'H
    }
}
```

### 6.14.17 PE-IoT

#### 6.14.17.1. [PE-IoT-by-Template-1](#)

This is the most basic IoT template.

##### PE-IoT-by-Template-1

```
iotVal ProfileElement ::= iot : {
    iot-header {
        mandated NULL,
        identification 171
    },
    templateID { 2 23 143 1 2 17 },
    ef-imsi {
        -- numerical format: 234101943787656
        fillFileContent : '082943019134876765'H
    },
    ef-ust {
        --aligned to PE-OPT-IoT-by-Template-1
        fillFileContent :
'020A040803060000400010000000000000'H
    },
    ef-acc {
        fillFileContent : '0001'H
    }
}
```

#### 6.14.17.2. [PE-IoT-by-Template-2](#)

The content is the identical with PE-IoT-by-Template-1, except the content of ef ust.

##### PE-IoT-by-Template-2

```
iotVal ProfileElement ::= iot : {
    iot-header {
```

```

    mandated NULL,
    identification 172
  },
  templateID { 2 23 143 1 2 17 },
  ef-imsi {
    -- numerical format: 234101943787656
    fillFileContent : '082943019134876765'H
  },
  ef-ust {
    -- aligned to PE-OPT-IoT-by-Template-2
    fillFileContent: '020A040803060000400010000000003E81'H
  },
  ef-acc {
    fillFileContent : '0001'H
  }
}

```

### 6.14.17.3. PE-IoT-by-Template-3

This PE has specific content for ef-arr with 16 records and the content of ef ust matches to PE-OPT-USIM-by-Template-9-v2. The files in this PE has securityAttributesReferenced values aligned to the content of ef-arr.

#### PE-IoT-by-Template-3

```

iotVal ProfileElement ::= iot : {
  iot-header {
    mandated NULL,
    identification 173
  },
  templateID { 2 23 143 1 2 17 },
  mf {
    fileDescriptor : {
      securityAttributesReferenced '0E'H
    }
  },
  ef-iccid {
    fileDescriptor : {
      securityAttributesReferenced '0B'H
    }
  },
  ef-dir {
    fileDescriptor : {
      securityAttributesReferenced '0A'H
    }
  },
  ef-arr {
    fileDescriptor : {
      -- Shareable Linear Fixed File
      -- 16 records, record length: 37 bytes
      -- ARR created with content recommended in Annex A
      (Section 9.9) of [SA PP TS] plus two additional records
      fileDescriptor '42210025'H,
      securityAttributesReferenced '0A'H,
      efFileSize '0250'H,
      proprietaryEFInfo {
        fillPattern 'FF'H
      }
    }
  },
}

```

```

    fillFileContent :
'8001019000800102A406830101950108800158A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015BA40683010A950108'H,
    fillFileOffset : 26,
    fillFileContent :
'800101900080011A9700800140A40683010A950108'H,
    fillFileOffset : 16,
    fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800111A40683010195010880014AA40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101A406830101950108800102A406830181950108800158A406830
10A950108'H,
    fillFileOffset : 4,
    fillFileContent :
'800101900080011AA406830101950108800140A40683010A950108'H,
    fillFileOffset : 10,
    fillFileContent : '800101900080015AA40683010A950108'H,
    fillFileOffset : 21,
    fillFileContent :
'8001019000800118A40683010A9501088001429700'H,
    fillFileOffset : 16,
    fillFileContent : '800101A40683010195010880015A9700'H,
    fillFileOffset : 21,
    fillFileContent :
'800113A406830101950108800148A40683010A950108'H,
    fillFileOffset : 15,
    fillFileContent : '80015EA40683010A950108'H,
    fillFileOffset : 26,
-- Rule 15: [Read: Always][Update/CreateEF: PIN Appl 1|PIN
Appl 2][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102A010A406830101950108A40683010295010880015
8A40683010A950108'H,
-- Rule 16: [Read: Always][Update/CreateEF: PIN Appl 1 &
ADM 1][Deactivate, Activate, DeleteSelf: ADM1]
    fillFileContent :
'8001019000800102AF10A406830101950108A40683010A95010880015
8A40683010A950108'H
},
ef-umpc {
    fileDescriptor : {
        securityAttributesReferenced '0A'H
    }
},
adf-usim {
    fileDescriptor : {
        securityAttributesReferenced '0E'H
    }
},
ef-imsi {
    -- numerical format: 234101943787656

```

```
    fillFileContent : '082943019134876765'H
  },
  ef-arr-usim {
    fileDescriptor : {
      securityAttributesReferenced '0A'H
    }
  },
  ef-keys {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-keysPS {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-ust {
    fileDescriptor : {
      efFileSize '0F'H
    }
  },
```

```
    fillFileContent : 'FEFF9F091FFEDD8341E310C0250000'H
  },
  ef-start-hfn {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-psloci {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-acc {
    fillFileContent : '0001'H
  },
  ef-fplmn {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-loci {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-ad {
    fileDescriptor : {
      securityAttributesReferenced '0A'H
    }
  },
  ef-ecc {
    fileDescriptor : {
      securityAttributesReferenced '0A'H
    }
  },
```

```

},
ef-netpar {
  fileDescriptor : {
    securityAttributesReferenced '05'H
  }
}
}

```

#### 6.14.17.4. PE-IoT-by-Template-4

This IoT template contains an altered ef-arr.

##### PE-IoT-by-Template-4

```

iotVal ProfileElement ::= iot : {
  iot-header {
    mandated NULL,
    identification 174
  },
  templateID { 2 23 143 1 2 17 },
  ef-arr {
    -- 8 records, record length: 33 bytes (default)
    -- Access Rule 2 changed to 800111A406830101950108
    80014AA40683010A950108 (Activate changed from ADM1 to
    PIN1)
    fillFileOffset : 35,
    fillFileContent : '11'H,
    fillFileOffset : 10,
    fillFileContent : '4A'H
  },
  ef-imsi {
    -- numerical format: 234101943787656
    fillFileContent : '082943019134876765'H
  },
  ef-acc {
    fillFileContent : '0001'H
  }
}

```

#### 6.14.17.5. PE-IoT-by-Template-5

This IoT template contains an altered ef-arr.

##### PE-IoT-by-Template-5

```

iotVal ProfileElement ::= iot : {
  iot-header {
    mandated NULL,
    identification 175
  },
  templateID { 2 23 143 1 2 17 },
  ef-arr {
    fileDescriptor : {
      -- 9 records, record length: 37 bytes
      fileDescriptor '42210025'H,
      efFileSize '014D'H
    },

```

```

-- Access Rule 9 added: [Read, Update, Increase:
PIN1][Deactivate, Activate, Delete: ADM1]
    fillFileOffset : 296,
    fillFileContent :
'800103A406830101950108800158A40683010A950108840132A406830
101950108'H
    },
    ef-imsi {
        -- numerical format: 234101943787656
        fillFileContent : '082943019134876765'H
    },
    ef-acc {
        fillFileContent : '0001'H
    }
}

```

#### 6.14.17.6. PE-IoT-by-Template-6

This IoT template contains an altered ef-arr.

##### PE-IoT-by-Template-6

```

iotVal ProfileElement ::= iot : {
    iot-header {
        mandated NULL,
        identification 176
    },
    templateID { 2 23 143 1 2 17 },
    ef-arr {
        fileDescriptor : {
            -- 7 records, record length: 27 bytes
            fileDescriptor '4221001B'H,
            efFileSize 'BD'H
        }
    },
    ef-imsi {
        -- numerical format: 234101943787656
        fillFileContent : '082943019134876765'H
    },
    ef-acc {
        fillFileContent : '0001'H
    }
}

```

#### 6.14.17.7. PE-IoT-by-Template-7

This IoT template contains an independent ef-arr-usim.

##### PE-IoT-by-Template-7

```

iotVal ProfileElement ::= iot : {
    iot-header {
        mandated NULL,
        identification 177
    },
    templateID { 2 23 143 1 2 17 },
    ef-imsi {
        fileDescriptor : {

```

```

    securityAttributesReferenced '01'H
  },
  -- numerical format: 234101943787656
  fillFileContent : '082943019134876765'H
},
ef-arr-usim {
  fileDescriptor : {
    -- 3 records, record length: 22 bytes
    fileDescriptor '42210016'H,
    securityAttributesReferenced '03'H,
    efFileSize '42'H,
    linkPath ''H
  },
  fillFileContent :
'800101A40683010195010880015AA40683010A950108'H,
  fillFileOffset : 0,
  fillFileContent :
'800103A406830101950108800158A40683010A950108'H,
  fillFileOffset : 0,
  fillFileContent : '800101900080015AA40683010A950108'H
},
ef-keys {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
},
ef-keysPS {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
},
ef-hpplmn {
  fileDescriptor : {
    securityAttributesReferenced '01'H
  }
},
ef-ust {
  fileDescriptor : {
    securityAttributesReferenced '01'H
  }
},
ef-start-hfn {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
},
ef-threshold {
  fileDescriptor : {
    securityAttributesReferenced '01'H
  }
},
ef-psloci {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
}

```

```

},
ef-acc {
  fileDescriptor : {
    securityAttributesReferenced '01'H
  },
  fillFileContent : '0001'H
},
ef-fplmn {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
},
ef-loci {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
},
ef-ad {
  fileDescriptor : {
    securityAttributesReferenced '03'H
  }
},
ef-ecc {
  fileDescriptor : {
    securityAttributesReferenced '03'H
  }
},
ef-netpar {
  fileDescriptor : {
    securityAttributesReferenced '02'H
  }
}
}

```

### 6.14.18 PE-OPT-IoT

#### 6.14.18.1. PE-OPT-IoT-by-Template-1

This is a basic OPT-IoT template.

#### PE-OPT-IoT-by-Template-1

```

optiotValue ProfileElement ::= opt-iot : {
  optiot-header {
    identification 181
  },
  templateID { 2 23 143 1 2 18 },
  ef-fdn {
  },
  ef-sms {
  },
  ef-smssp {
  },
  ef-smss {
  },
  ef-spn {

```



```

-- ASCII format: "TCA"
fillFileContent : '02544341'H
},
ef-est {
  fillFileContent : '00'H
},
ef-oplmnwact {
},
ef-hplmnwact {
},
ef-ehplmn {
},
ef-epsloci {
},
ef-epsnsc {
}
}

```

#### 6.14.18.2. PE-OPT-IoT-by-Template-2

The content of DF 5GS is identical with PE-5GS-by-Template-1-v3.

#### PE-OPT-IoT-by-Template-2

```

optiotValue ProfileElement ::= opt-iot : {
  optiot-header {
    mandated NULL,
    identification 182
  },
  templateID { 2 23 143 1 2 18 },
  ef-fdn {
  },
  ef-sms {
  },
  ef-smssp {
  },
  ef-smss {
  },
  ef-spn {
    -- ASCII format: "TCA"
    fillFileContent : '02544341'H
  },
  ef-est {
    fillFileContent : '00'H
  },
  ef-oplmnwact {
  },
  ef-hplmnwact {
  },
  ef-ehplmn {
  },
  ef-epsloci {
  },
  ef-epsnsc {
  },
  df-df-5gs {
  },
  ef-5gs3gpploci {
    fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H

```

```

},
ef-5gsn3gpploci {
  fillFileContent :
'FFFFFFFFFFFFFFFFFFFFFFFF42F61800000001'H
},
ef-5gs3gppnsc {
},
ef-5gsn3gppnsc {
},
ef-5gauthkeys {
},
ef-uac-aic {
  fillFileContent : 'FFFFFFF'H
},
ef-opl5g {
  fileDescriptor : {
    efFileSize  '32'H -- 50 bytes
  }
},
ef-routing-indicator {
}
}

```

#### 6.14.18.3. PE-OPT-IoT-by-Template-3

The files in this PE has securityAttributesReferenced values aligned to the content of ef-arr defined in 6.14.17.3 PE-IoT-by-Template-3.

#### PE-OPT-IoT-by-Template-3

```

optiotValue ProfileElement ::= opt-iot : {
  optiot-header {
    identification 183
  },
  templateID { 2 23 143 1 2 18 },
  ef-fdn {
  },
  ef-sms {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-smssp {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-smss {
    fileDescriptor : {
      securityAttributesReferenced '05'H
    }
  },
  ef-spn {
    fileDescriptor : {
      securityAttributesReferenced '0A'H
    },
    -- ASCII format: "TCA"
  }
  fillFileContent : '02544341'H
}

```

```
},
ef-est {
  fillFileContent : '00'H
},
ef-oplmnwact {
},
ef-hplmnwact {
},
ef-ehplmn {
},
ef-epsloci {
  fileDescriptor : {
    securityAttributesReferenced '05'H
  }
},
ef-epsnsc {
  fileDescriptor : {
    securityAttributesReferenced '05'H
  }
}
}
```

## 6.15 Profile Package definition

The Profile Package defined based on [SA PP TS] v3.x is not compatible with an eUICC which supports TCA\_VERSION v2.x. To enable testing both v3.x and v2.x eUICC there are separate Profile Packages defined:

- Profile Package v2: it is based on [SA PP TS] v2.3.1.
- Profile Package v3: it is based on [SA PP TS] v3.1.

## 7. Profile Package General Structure

### 7.1 Test requirements

The test requirements are extracted from sections 7.2 and 7.3 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ7.1.1.1	Each PE is described and can be processed by the eUICC independently from the others.
RQ7.1.1.2	An identification number shall be associated to every PE.
RQ7.1.1.3	A PE starts with a header containing the following information: <ul style="list-style-type: none"> <li>• PE identification number.</li> <li>• Optional flag indicating that the support of this PE is mandatory.</li> <li>• PE type.</li> <li>• PE length.</li> </ul>
RQ7.1.1.4	If a feature described by a PE which is flagged as mandatory is not supported by the eUICC: <ul style="list-style-type: none"> <li>• An error is reported to the Profile Creator.</li> <li>• The processing of the Profile Package is cancelled.</li> <li>• And all the PE already processed shall be discarded.</li> </ul>
RQ7.1.1.5	If a PE is not flagged as mandatory, and if the eUICC does not support the associated feature, the error is reported but the processing of the Profile Package continues.
RQ7.1.1.5a	If a PE is not flagged as mandatory, and the eUICC cannot install the PE or does not support the associated feature, a warning shall be reported and the processing of the Profile Package shall continue, except if an error is reported for any other reason. Note: This REQ is applicable from SA PP TS v3.1 onwards
RQ7.1.1.6	In order to avoid errors and warnings during the processing of a Profile Package, the Profile Creator may audit the targeted eUICC before building a Profile Package. In that case, all the features described in the Profile Package will be entirely supported by the eUICC.
RQ7.1.1.7	The features that shall be supported by the Profile are also described in the Profile header. In case the eUICC does not support one of the features listed in this Profile header, the eUICC shall immediately return an error code and abort the processing of the Profile.
RQ7.1.1.8	When an eUICC encounters an unknown tag, it shall report either an error or a warning using the code <code>invalid-parameter</code>
<p>NOTE 1: RQ7.1.1.2 and RQ7.1.1.3 are related to the format of the profile package. These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly formatted profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.</p> <p>NOTE 2: VOID</p> <p>NOTE 3: RQ7.1.1.6 is out of the scope of this specification.</p> <p>NOTE 4: RQ7.1.1.1 and the last bullet point of RQ7.1.1.4 is not testable</p>	

### 7.2 Test cases / scenarios

RQ7.1.1.5 is tested in Chapter 8.2.3.

## **8. Profile Package Elements Definition**

### **8.1 Test requirements**

#### **8.1.1 Common types**

The test requirements are extracted from section 8.1 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.1.1	The Profile Package shall respect the size constraints 0 to 255 for the basic integer type Uint8.
RQ8.1.1.2	The Profile Package shall respect the size constraints 0 to 32267 for the basic integer type Uint15.
RQ8.1.1.3	The Profile Package shall respect the size constraints 0 to 65535 for the basic integer type Uint16.
RQ8.1.1.4	VOID
RQ8.1.1.5	The Application Identifier (AID) shall be an OCTET STRING with the size of 5 to 16 bytes.
RQ8.1.1.6	The PE Header shall be present at the beginning of all PE-s described in this specification.
RQ8.1.1.7	The PE Header may consist of an optional "mandated" field. The type of the mandated field shall be NULL.
RQ8.1.1.8	If the mandated field is set the support of this PE is mandatory for the installation of this Profile. If the eUICC does not support the following PE, it shall abort the processing of the Profile and return an error to the sender of the Profile.
RQ8.1.1.9	The PE Header shall consist of an "identification" field. The type of the identification field shall be Uint15.
RQ8.1.1.10	The identification field is used to uniquely identify the PE within a Profile. It will be used for error reporting to the sender of the Profile.
RQ8.1.1.11	VOID
RQ8.1.1.12	The ProfileHeader shall be the first element and provided once within a profile download only.
RQ8.1.1.13	VOID
RQ8.1.1.13a	The PE MF may be provided once as the first element of the file system creation after the ProfileHeader PE.
RQ8.1.1.13b	In a Full Profile, if PE MF is not used, the MF shall be created as the first element of the file system using the PE Generic File Management.
RQ8.1.1.13c	In an IoT Minimal Profile PE-MF is not allowed.
RQ8.1.1.14	The PE-CD is optional and shall come after the creation of the MF.
RQ8.1.1.15	The PE-TELECOM is optional and shall come after the creation of the MF.
RQ8.1.1.16	The PE-USIM is optional and shall come after the creation of the MF.
RQ8.1.1.17	The PE-ISIM is optional and shall come after the creation of the MF.
RQ8.1.1.18	The PE-CSIM is optional and shall come after the creation of the MF.
RQ8.1.1.19	The PE-OPT-USIM is optional and shall come after the creation of an ADF USIM.
RQ8.1.1.20	The PE-GSM-ACCESS is optional and shall come after the creation of an ADF USIM.
RQ8.1.1.21	The PE-PHONENOOK is optional and shall come after the creation of an ADF USIM.
RQ8.1.1.22	The PE-OPT-ISIM is optional and shall come after the creation of an ADF ISIM.
RQ8.1.1.23	The PE-OPT-CSIM is optional and shall come after the creation of an ADF CSIM.
RQ8.1.1.24	When using PE-GenericFileManagement the dependencies within the file system creation need to be considered.
RQ8.1.1.25	PE-PINCodes shall be created in the context according to their scope.
RQ8.1.1.26	Global PINs (Application PINs according to ETSI TS 102 221) shall be provided once in the context of the creation of the MF of the UICC.
RQ8.1.1.26b	Local PINs may be provided once in the context of the creation of a DF or ADF.
RQ8.1.1.27	Only a single PE-PINCodes is allowed in the context of the MF, or in the context of a DF (ADF).
RQ8.1.1.28	VOID
RQ8.1.1.28a	If PE-AKAPParameters is provided, it shall be present in the context of the creation of a NAA filesystem.
RQ8.1.1.29	VOID
RQ8.1.1.29a	PE-AKAPParameters may be provided once or several times per NAA. If several sets of parameters are provided for one NAA, the set of parameters used by this NAA is not defined.
RQ8.1.1.30	PE-AKAPParameters is not allowed in the context of MF.
RQ8.1.1.31	PE-AKAPParameters is not allowed in the context of SDs.
RQ8.1.1.32	PE-AKAPParameters is not allowed in the context of applications.
RQ8.1.1.33	VOID
RQ8.1.1.33a	PE-PUKCodes may only be provided once within the context of the UICC file system (MF). If PE-PUKCodes is not present in the Profile Package then no PUK codes are defined.
RQ8.1.1.34	PE-PUKCodes shall include all PUK codes for the complete profile.
RQ8.1.1.35	PE-SecurityDomain is optional and shall be provided after the creation of the file system, NAA parameters and PIN/PUK configuration.
RQ8.1.1.36	VOID
RQ8.1.1.36b	PE-Application is optional and shall be provided after the creation of the SDs. Note: This REQ is applicable from SA PP TS v2.1 onwards.
RQ8.1.1.37	PE-RFM is optional. It shall be provided after the creation of the SDs the RFM parameters shall be assigned to.
RQ8.1.1.38	PE-NonStandard is optional and in general may be provided in any position after the profile header. Further restrictions depend on the respective application.
RQ8.1.1.39	PE-End shall be provided once at the end of the Profile Package.
RQ8.1.1.40	PE-EAP is optional and shall come after creation of the ADF that supports the EAP feature.

RQ8.1.1.41	PE-DF-5GS is optional and shall come after creation of an ADF USIM
RQ8.1.1.42	PE-DF-SAIP is optional and shall come after creation of an ADF USIM
RQ8.1.1.43	In IoT Minimal Profile the PE-IoT shall be provided once as the first element of the file system after the "ProfileHeader". This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.1.43b	PE-IoT shall not be used in a Full Profile. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.1.44	PE-OPT-IoT is optional and shall come after PE-IoT This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.1.45	PE-DF-SNPN is optional and shall come after the creation of an ADF USIM
RQ8.1.1.46	PE-DF-5GPROSE is optional and shall come after the creation of an ADF USIM
NOTE 1: RQ8.1.1.1, RQ8.1.1.2, RQ8.1.1.3, RQ8.1.1.5, RQ8.1.1.6, RQ8.1.1.7, RQ8.1.1.9 and RQ8.1.1.13c are not testable.	
NOTE 2: VOID	
NOTE 3: VOID	
NOTE 4: VOID	
NOTE 5: VOID	
NOTE 6: Testing of RQ8.1.1.30, RQ8.1.1.31 and RQ8.1.1.32 are out of scope.	
NOTE 7: VOID	
NOTE 8: VOID	
NOTE 9: RQ8.1.1.29a is tested only with one PE-AKAPParameters provided for the NAA.	
NOTE 10: RQ8.1.1.12, RQ8.1.1.13a, RQ8.1.1.13b, RQ8.1.1.14, RQ8.1.1.15, RQ8.1.1.17, RQ8.1.1.18, RQ8.1.1.19, RQ8.1.1.22, RQ8.1.1.23, RQ8.1.1.24, RQ8.1.1.26, RQ8.1.1.26b, RQ8.1.1.27, RQ8.1.1.28a, RQ8.1.1.33a, RQ8.1.1.35, RQ8.1.1.39, RQ8.1.1.40, RQ8.1.1.41, RQ8.1.1.42, RQ8.1.1.43, RQ8.1.1.43b, RQ8.1.1.44, RQ8.1.1.45, RQ8.1.1.46 are related to the format of the profile package. These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly formatted profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.	
NOTE 11: RQ8.1.1.38 is only partially testable.	

### 8.1.2 Profile header

The test requirements are extracted from section 8.2 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.2.1	The ProfileHeader PE shall be used once and shall be the first PE of the Profile Package.	
RQ8.1.2.2	The ServiceList type is used to indicate the services that shall be supported by the eUICC for the installation of a Profile. The type of the fields in the ServiceList shall be NULL.	
RQ8.1.2.3	The following list gives the features that the eUICC shall support in order to provide the associated service.	
	<b>Service</b>	<b>Feature provided by the eUICC</b>
	contactless	support the SWP and HCI interfaces as well as the associated APIs.
	usim	the USIM application as defined by 3GPP [USIM].
	isim	the ISIM application as defined by 3GPP [ISIM].
	csim	the CSIM application as defined by 3GPP2 [CSIM].
	milennage	the milennage AKA authentication algorithm as defined by 3GPP [MILENAGE].
	tuak128	the TUAK AKA authentication algorithm with 128 bit key length as defined by 3GPP [TUAK].
	tuak256	the TUAK AKA authentication algorithm with 256 bit key length as defined by 3GPP [TUAK].
	cave	the CAVE authentication algorithm as defined by TIA [CAVE].
	gba-usim	support of GBA authentication context in the USIM application.
	gba-isim	support of GBA authentication context in the ISIM application.
	mbms	support of the MBMS authentication context in the USIM application.
	eap	support of the UICC EAP client.
	javacard	support of the Java Card TM runtime environment.
	multos	support of the Multos TM runtime environment.
	multiple-usim	support of multiple USIM instances – requires “usim” to be present in the list.
	multiple-isim	support of multiple ISIM instances – requires “isim” to be present in the list.
	multiple-csim	support of multiple CSIM instances – requires “csim” to be present in the list.
	usim-test-algorithm	support of Test USIM Parameters for authentication test algorithm as defined by 3GPP [3GTEST]. Note: This is applicable from SA PP TS v2.1 onwards.
	ber-tlv	support of the BER-TLV Elementary File type. Note: This is applicable from SA PP TS v2.1 onwards.
	dfLink	support of DF Link feature. Note: This is applicable from SA PP TS v2.1 onwards.
	cat-tp	If set any SD with SCP80 shall support CAT_TP (regardless if SCP80 keys are available or not). Connectivity parameters are provided by the OTA server in the initial push message. Note: This is applicable from SA PP TS v2.2 onwards.
	get-identity	support of the GET IDENTITY as defined in ETSI [102 221] and the associated interface for SUCI derivation defined in 3GPP [31.130] At least one implementation of the ECIES profile A or profile B as described in 3GPP [33.501] shall be supported by the eUICC when this function is supported. The Null-scheme shall be supported in addition of the ECIES scheme.
	profile-a-x25519	implementation of the ECIES Profile A as described in 3GPP [33.501]
	profile-b-p256	implementation of the ECIES Profile B as described in 3GPP [33.501]
	dns-resolution	support of DNS Resolution mechanism and DNS Resolution Parameters configuration as described in GlobalPlatform Amendment B specification [GP AB]
	scp11ac	implementation of the SCP11a and SCP11c as described in GP [GP AF]. If set, the following implementation options shall be supported: “SD persistently stores PK.OCE.ECKA” (for SCP11a only) and “Certificate chain” (for SCP11a & SCP11c).
	scp11c-authorization-mechanism	support of the “SCP11c authorization mechanism” (Tag ‘BF20’) implementation option as described in GP [GP AF].
	s16mode	support of S16 mode as defined in GP specifications [GP AF] and [GP AD].
	eaka	support of enhanced AKA algorithm defined in 3GPP
RQ8.1.2.3b	When a service is present in the sequence and not supported or not known by the eUICC the installation of the Profile Package shall be aborted	



RQ8.1.2.4	The ProfileHeader shall contain the "major-version". The type of the major-version shall be Uint8.
RQ8.1.2.5	When receiving the ProfileHeader, the eUICC shall check the major-version. If the version indicated by the Profile is not supported by the eUICC (e.g. if it is an earlier or an older version), the eUICC shall return an error "unsupported-profile-version" and stop the processing of the Profile.
RQ8.1.2.6	The ProfileHeader shall contain the "minor-version". The type of the minor-version shall be Uint8.
RQ8.1.2.7	The minor-version is only informative. It may indicate that the Profile contains elements that the eUICC will not be able to process if it supports an older version of the specification. In that case, these elements shall be ignored by the eUICC unless they are marked as mandatory in the PE header.
RQ8.1.2.8	The ProfileHeader may contain the "profileType". The type of the profileType shall be UTF8String. The "profileType" is a free optional text indicating for example, the name of the Profile issuer and the type of Profile.
RQ8.1.2.9	The ProfileHeader shall contain the "iccid". The type of iccid shall be OCTET STRING (SIZE (10)).
RQ8.1.2.9a	The "iccid" shall be encoded non-swapped as per ITU E.118 representation and padded with 'F' if less digits are used (Example:8947010000123456784F) (see NOTE 4).
RQ8.1.2.9b	For profiles using the Mandatory IoT Minimal Profile template, the eUICC shall use the value of "iccid" in the creation of default content for EF <sub>ICCID</sub> . This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.2.10	The ProfileHeader may contain the "pol". The type of the pol shall be OCTET STRING. The pol contains the policy rules within a Profile.
RQ8.1.2.11	If pol is not supplied in the Profile Package, its value shall be set to all 0 in the eUICC.
RQ8.1.2.12	The ProfileHeader shall contain the "eUICC-Mandatory-services". The type of the eUICC-Mandatory-services shall be ServiceList.
RQ8.1.2.13	The ProfileHeader shall contain the "eUICC-Mandatory-GFSTEList".
RQ8.1.2.14	The "eUICC-Mandatory-GFSTEList" contains a list of OIDs identifying file system templates which shall be supported by the eUICC in order for the Profile to be correctly installed on the eUICC.
RQ8.1.2.15	This list may contain the OIDs associated to the file system template defined in "ANNEX A (Normative): File Structure Templates Definition" of this specification.
RQ8.1.2.16	The ProfileHeader may contain the "connectivityParameters". The "connectivityParameters" contains the connectivity parameters as defined in GSMA in [GS RPT], in table 52, not including '3A07' DGI.
RQ8.1.2.17	When the Profile Package contains BER-TLV files, or DF links in a PE which is not mandatory and without indication in the ServicesList that these features shall be supported and the eUICC receiving this Profile Package does not support one of these features, the eUICC shall send a status code set to "feature-not-supported" without any "additional-information" and the installation shall continue without creating the BER-TLV file or the DF link. Note: This REQ is applicable from SA PP TS v2.1 onwards.
RQ8.1.2.18	When the Profile Package contains BER-TLV files, or DF links in a PE which is mandatory and without indication in the ServicesList that these features shall be supported and the eUICC receiving this Profile Package does not support one of these features, the eUICC shall send a status code set to "feature-not-supported" without any "additional-information" and the installation of the Profile shall be aborted. Note: This REQ is applicable from SA PP TS v2.1 onwards.
RQ8.1.2.19	If a template OID present in the list is not supported by the eUICC the installation of the Profile Package shall be aborted. Note: This REQ is applicable from SA PP TS v2.1 onwards.
RQ8.1.2.20	The ProfileHeader may contain the "eUICC-Mandatory-AIDs" which contains a SEQUENCE of aid (ApplicationIdentifier) and version (OCTET STRING with a size of 2) pairs. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.2.21	When an AID is present in the Profile header and not known by the eUICC, the installation of the Profile Package shall be aborted with the status code lib-not-supported. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.2.22	When the version is not compatible with the versions supported by the eUICC, the installation of the Profile Package shall also be aborted by the eUICC with the status code lib-not-supported. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.2.23	The ProfileHeader may contain "IoTOptions". This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.2.24	If "IoTOptions" is present and the eUICC does not support the IoT Minimal Profile, the installation of the Profile Package shall be aborted with the status code set to "feature-not-supported". This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.2.25	The "IoTOptions" contains "pix". The type of "pix" shall be OCTET STRING (SIZE (7..11)). This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.2.26	The value of "pix" shall be used for the creation of EF DIR and ADF USIM in case of IOT minimal Profile is defined. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.2.27	The "IoTOptions" is mandatory in an IoT Minimal Profile. This REQ is applicable from SA PP TS v3.3.1 onwards.

RQ8.1.2.28

The following data element is defined in order to be used during the eligibility check of the eUICC by the remote provisioning server:

```
-- ASN1START
-- Definition of UICCCapability
UICCCapability ::= BIT STRING {
    contactlessSupport(0), -- Contactless (SWP, HCI and associated APIs)
    usimSupport(1),        -- USIM as defined by 3GPP
    isimSupport(2),        -- ISIM as defined by 3GPP
    csimSupport(3),        -- CSIM as defined by 3GPP2

    akaMilenage(4),        -- Milenage as AKA algorithm
    akaCave(5),            -- CAVE as authentication algorithm
    akaTuak128(6),         -- TUAK as AKA algorithm with 128 bit key length
    akaTuak256(7),         -- TUAK as AKA algorithm with 256 bit key length
    usimTestAlgorithm(8),  -- USIM test algorithm
    rfu2(9),              -- reserved for further algorithms

    gbaAuthenUsim(10),     -- GBA authentication in the context of USIM
    gbaAuthenISim(11),     -- GBA authentication in the context of ISIM
    mbmsAuthenUsim(12),    -- MBMS authentication in the context of USIM
    eapClient(13),         -- EAP client

    javacard(14),          -- Java Card(TM) support
    multos(15),            -- Multos support

    multipleUsimSupport(16), -- Multiple USIM applications are supported
within the same Profile
    multipleIsimSupport(17), -- Multiple ISIM applications are supported
within the same Profile
    multipleCsimSupport(18), -- Multiple CSIM applications are supported
within the same Profile

    berTlvFileSupport(19), -- BER TLV files
    dfLinkSupport(20),     -- Linked Directory Files
    catTp(21),             -- Support of CAT TP
    getIdentity(22),       -- Support of the GET IDENTITY command as defined
in ETSI TS102 221
    profile-a-x25519(23),  -- Support of ECIES Profile A as defined in 3GPP
TS 33.501 [87]
    profile-b-p256(24),    -- Support of ECIES Profile B as defined in 3GPP
TS 33.501 [87]
    suciCalculatorApi(25), -- Support of the associated API for SUCI
derivation as defined in 3GPP 31.130 [31.130]
    dns-resolution(26),    -- Support of DNS Resolution as defined by GP Amd
B
    scp11ac(27),          -- Support of GP Amd F SCP11 variants a and c
    scp11c-authorization-mechanism(28), -- Support of SCP11c authorization
mechanism (Tag 'BF20')
    s16mode(29),          -- Support of S16 mode as defined in GP Amd D and Amd F
    eaka(30),              -- Support of enhanced AKA algorithm as defined
in 3GPP TS [33.102]
```

	<pre>iotminimal(31)          -- Support of IoT Minimal Profile as described in section 7.5 } -- ASN1STOP This REQ is applicable from SA PP TS v3.3.1 onwards.</pre>
<p>NOTE 1:VOID</p> <p>NOTE 2: RQ8.1.2.11 is not testable (there is no interoperable command to read the value).</p> <p>NOTE 3: RQ8.1.2.13 is implicitly tested everytime ProfileHeader is used.</p> <p>NOTE 4: REQ8.1.2.9a, RQ8.1.2.16 and RQ8.1.2.28 are out of scope of this specification.</p> <p>NOTE 5: RQ8.1.2.2, RQ8.1.2.4, RQ8.1.2.6, RQ8.1.2.8, RQ8.1.2.9, RQ8.1.2.10, RQ8.1.2.12, RQ8.1.2.13, RQ8.1.2.23, RQ8.1.2.25 are related to the format of the types used in the profile package, or mandate some fields to be used in the profile package. The ASN1 converter ensures compliance when the profile package is created.</p>	

### 8.1.3 File system

The test requirements are extracted from section 8.3 and from Annex A of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.3.1	Templates need to be created according to the specified settings.
RQ8.1.3.2	Templates can be sent in any order considering the dependencies (e.g. some templates require that a NAA has already been created).
RQ8.1.3.3	Parameters which alter the default given in a template needs to result in the desired configuration; e.g. change of file size, access rule reference.
RQ8.1.3.4	If a file within a template is specified as 'do not create' it must not be available within the created file system.
RQ8.1.3.5	It shall be possible to mix templates with Generic FileSystem Commands.
RQ8.1.3.6	It shall be possible to create a complete profile by Generic FileSystem Commands without use of any templates.
RQ8.1.3.7	Using a template marked as mandated but which is not supported by the eUICC shall lead to an error.
RQ8.1.3.8	The eUICC shall support any template it claims to support.
RQ8.1.3.9	It may be possible to create multiple instances of the following templates: <ul style="list-style-type: none"> <li>- USIM</li> <li>- ISIM</li> <li>- CSIM</li> <li>- EAP-AKA</li> </ul>
RQ8.1.3.10	Templates shall always be created within the current context. E.g. the optional USIM EFs template shall be created in the currently selected application.
RQ8.1.3.11	The eUICC shall be able to create multiple instances of a file from a template by following the process described in figure 2 of [SA PP TS].
RQ8.1.3.11b	The profile package may create the file with a different File ID if provided in the fcp without limitations on the value. This REQ is applicable from SA PP TS v2.2 onwards
RQ8.1.3.12	It shall not be possible to create two files with the same file path irrespective of whether templates or a generic file system is used.
RQ8.1.3.13	VOID
RQ8.1.3.14	The eUICC shall be able to handle the "template modification rules" described within the specification.
RQ8.1.3.15	File content provided within the profile package shall be applied to the created file.
RQ8.1.3.16	Within an not created by default template, files shall only be created if the respective TLV is explicitly included in the profile package.
RQ8.1.3.17	For created by default templates all files shall be created unless they are explicitly marked as "do not create".
RQ8.1.3.18	For all files which are not fully defined in the template specification (open parameters like size) the respective parameters (except content) shall be included in the profile package.
RQ8.1.3.18b	Any content not explicitly set within the profile package shall be personalis,ed with the default content (FF..FF). This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.3.19	FCP of files which have been created may include proprietary information. These parameters shall be ignored when checking the settings of files which have been created.
RQ8.1.3.20	VOID
RQ8.1.3.20a	The access conditions which have been configured shall apply for the respective files; e.g.: Read Never implies that the file is not readable even if other PINs are verified; in case PIN1 is specified for read it shall only be possible to read the file if PIN1 has been verified.
RQ8.1.3.21	The eUICC shall support access rule conditions according to the UICC specification ETSI TS 102 221 [102 221]; also supporting AND/OR conditions like PIN1    ADM1.
RQ8.1.3.22	The eUICC shall apply all provided FCP parameters according to ETSI TS 102 221 [102 221].
RQ8.1.3.23	If parameter proprietaryEFInfo is provided and no repeat or fill pattern are present, the default template fill or repeat pattern shall be used. This REQ is applicable from SA PP TS v2.3 onwards
RQ8.1.3.24	The eUICC SHALL support Profile Element with multiple FileManagement elements.
RQ8.1.3.25	In case of IoT Minimal Profiles the ef arr in the MF is created with a default content as defined in section 9.10.3 of [SA PP TS] v3. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.3.26	In case of IoT Minimal Profiles by default, the eUICC sets a linkPath to '2F06' for the ef arr in USIM ADF. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.3.27	When service n°142 is not available the context for SUCI calculation is SUCI context. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.3.28	When service n°142 is available the context for SUCI calculation is SUCI NSW0 context. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.3.29	In case of a template link file, an empty linkPath indicates that the link file shall be turned into an independent file. This REQ is applicable from SA PP TS v3.3.1 onwards.

RQ8.1.3.30	The eUICC SHALL support <code>linkPath</code> with size between 2 and 8 bytes. This REQ is applicable from SA PP TS v3.0 onwards.
RQ8.1.3.31	The eUICC SHALL support <code>filePath</code> with size between 0 and 8 bytes. This REQ is applicable from SA PP TS v2.3.1 onwards.
<p>NOTE 1: VOID</p> <p>NOTE 2: Testing of RQ8.1.3.28 is FFS.</p> <p>NOTE 3: RQ8.1.3.8 and RQ8.1.3.15 are implicitly tested in all test cases.</p> <p>NOTE 4: RQ8.1.3.18 is related to the format of the profile package. These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly formatted profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.</p> <p>NOTE 5: VOID</p> <p>NOTE 6: RQ8.1.3.12 and RQ8.1.3.19 are not testable.</p>	

#### 8.1.4 NAA(s)

The test requirements are extracted from section 8.4 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.4.1	The PE-AKAPParameters shall be tested with the USIM, ISIM and CSIM NAA.
RQ8.1.4.2	PE-AKAPParameters shall be tested using both options: milenage and TUAK.
RQ8.1.4.2b	PE-AKAPParameters shall be tested using option usim-test-algorithm. Note: This REQ is applicable from SA PP TS v2.1 onwards
RQ8.1.4.3	For milenage PE-AKAPParameters shall be tested with the following parameters: key: 16 byte length opc: 16 byte length RES Length Options: 64bits MAC-A, MAC-C Size: does not apply. To be set to 0 (64 bit) CK and IK size: 128 bits Rotation constants shall have a length of 5 bytes xoringConstants shall have a length of 80 bytes.
RQ8.1.4.3b	For TUAK, PE-AKAPParameters shall be tested with the following parameters: key: 16 byte length, 32 byte length opc: 32 byte length RES Length Options: 32bits, 64bits, 128bits MAC-A, MAC-S size: 64bits, 128bits. 256bits CK, IK size: 128bits, 256bits
RQ8.1.4.3c	For usim-test-algorithm, PE-AKAPParameters shall be tested with the following parameters: Key: 16 byte length. Note: This REQ is applicable from SA PP TS v2.1 onwards
RQ8.1.4.3d	For usim-test-algorithm, PE-AKAPParameters shall be tested with the following parameters: RES Length Options: 32bits, 64bits, 128bits This REQ is applicable from SA PP TS v2.2 onwards
RQ8.1.4.4	For testing milenage the test vectors from 3GPP [MILENAGE TEST] shall be used: PE-AKAPParameters shall be initialised with the respective settings.
RQ8.1.4.5	For testing TUAK the test vectors from 3GPP [TUAK TEST] shall be used: PE-AKAPParameters shall be initialised with the respective settings.
RQ8.1.4.6	Using Authenticate within USIM NAA in 2G Compatibility mode shall only work if service 38 within the UST is enabled.
RQ8.1.4.7	Authenticate command shall only work if respective Application PIN for the NAA has been verified (e.g. PIN1).
RQ8.1.4.8	Sharing network credentials via the mapping function shall be tested between USIM NAAs, ISIM NAAs and USIM/ISIM. Same algorithmID, algorithmOptions, key, (T)opc, rotationConstants, xoringConstants and authCounterMax for both NAAs is to be anticipated. The following mapping permutations shall be tested: - -Share sqnInit, sqnOptions, sqnDelta, sqnAgeLimit. - -Share sqnOptions, sqnDelta, sqnAgeLimit.
RQ8.1.4.8b	The following mapping permutation for the mappingOptions data element shall be tested: - Share sqnOptions, sqnDelta, sqnAgeLimit and SQN array Note: This REQ is applicable from SA PP TS v2.1 onwards
RQ8.1.4.9	DEFAULT values shall be verified by the relevant test to ensure that they are set correctly.
RQ8.1.4.10	It shall be tested if the DEFAULT values can be overwritten by the profile package.
RQ8.1.4.11	Values for rotationConstants and xoringConstants shall only be applied in case milenage is used, otherwise ignored.
RQ8.1.4.11b	Value for numberOfKeccak shall only be applied in case TUAK is used, otherwise ignored. Note: This REQ is applicable from SA PP TS v2.1 onwards
RQ8.1.4.12	SQN handling shall be tested with the available options: - Authentication shall not work for blocked SQN when the wrap around option deactivated. - If SQN value has reached the maximum value 07FFFFFFFF authentication shall still work (by disabled SQN verification) if the wrap around option is activated. - If incoming SQN is out of range (depends on delta and age limit) the eUICC shall indicate the need for resynchronization – provided the authentication vector passes authentication. - Authentication shall work if SQN is within the desired range (considering Delta and Age limit).
RQ8.1.4.13	If a value is provided for authCounterMax it shall be tested. It defines the accumulated number of Authenticate Commands for all the NAA-s which share the counter over the complete life time of the Profile (independent from resets, profile de-/activation). It shall be provided once in a Profile Package. Once the actual number of Authenticate commands reaches the defined value the command should fail and return '6F00' as the respective error code.
RQ8.1.4.14	The eUICC shall support the presence of a single PE-AKAPParameters object per NAA.
RQ8.1.4.15	PE-CSIMParameters may be provided in the context of ADF_CSIM
RQ8.1.4.16	PE-CSIMParameters shall contain an authenticationKey of type OCTET STRING with a size of 8.

RQ8.1.4.17	PE-CSIMParameters may contain an ssd of type OCTET STRING with a size of 16
RQ8.1.4.18	PE-CSIMParameters may contain a hrpdAccessAuthenticationData of type OCTET STRING with a size of 9 to 32 bytes
RQ8.1.4.18a	PE-CSIMParameters may contain a hrpdAccessAuthenticationData of type OCTET STRING with a size 2 to 32 bytes. This REQ is applicable from SA PP TS v2.2 onwards
RQ8.1.4.19	PE-CSIMParameters may contain a simpleIPAuthenticationData of type OCTET STRING with a size of 10 to 483 bytes
RQ8.1.4.19a	PE-CSIMParameters may contain a simpleIPAuthenticationData of type OCTET STRING with a size of 3to 483 bytes. This REQ is applicable from SA PP TS v2.2 onwards
RQ8.1.4.20	PE-CSIMParameters may contain a mobileIPAuthenticationData of type OCTET STRING with a size of 19 to 957 bytes
RQ8.1.4.20a	PE-CSIMParameters may contain a mobileIPAuthenticationData of type OCTET STRING with a size of 12to 957 bytes. This REQ is applicable from SA PP TS v2.2 onwards
RQ8.1.4.20b	PE-CSIMParameters may contain a mobileIPAuthenticationData of type OCTET STRING with a size of 5 to 957 bytes. This REQ is applicable from SA PP TS v2.3 onwards
NOTE : VOID	
NOTE 2: RQ8.1.4.16 is not testable.	
NOTE 3: RQ8.1.4.1 is tested with USIM and ISIM, but not tested with CSIM.	
NOTE 4: RQ8.1.4.11 is related to the format of the profile package. This requirement is tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly formatted profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.	

### 8.1.5 PIN and PUK codes

The test requirements are extracted from section 8.5 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.5.1	Global PINs created by the PE-PINCodes shall be valid within the complete FileSystem.
RQ8.1.5.1a	For Full Profiles all the Global PINs referenced by a pinStatusTemplateDO shall be defined in the 'PIN Context' of the MF. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.5.1b	For IoT minimal Profiles the PIN Code PE may be used right after the IoT minimal Profile Header or right after the creation of the PUK codes (if any) for global PINs. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.5.2	Local PINs shall only be valid within the context (DF/ADF and sub DFs) where they are defined.
RQ8.1.5.2b	The ADF/DF where the Local PIN will be created is the first ADF or DF created by the previous PE-Template or the previous PE-Generic File Management. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.5.2c	All the Local PINs referenced by a pinStatusTemplateDO shall either be defined in a parent ADF or DF or created in a following PE-PINCodes. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.5.2d	If Local PINs referenced by a pinStatusTemplateDO is not created in a following PE-PINCodes. the error code pin-code-missing may be returned and in this case the installation of the Profile Package shall be aborted. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.5.2e	For IoT minimal Profiles the PIN Code PE may be used after the creation of an ADF or a DF for local PINs. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.5.2f	For IoT Minimal Profiles the "PIN Context" after the use of PE IoT shall be set to ADF USIM instead of the MF. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.5.3	VOID
RQ8.1.5.4	Local PINs shared shall share remaining attempts in all contexts where they are valid.
RQ8.1.5.5	It shall be possible to create Global PINs in the context of the MF. E.g. after creation of the MF or also after selection of the MF using Generic File System.
RQ8.1.5.6	VOID
RQ8.1.5.7	It shall be possible to share one PUK for multiple PIN values.
RQ8.1.5.8	Blocked PINs cannot be verified via I/O, but applets with the respective access rights may execute the authorised commands (update, read, create, delete etc).
RQ8.1.5.9	Within the FCP of the ADF and the MF the eUICC has to indicate the status of the PINs/PUKs as specified within the template (e.g. remaining attempts, PINs initialised, PINs available, PIN activated/deactivated) provided that the settings have not been altered after profile installation.
RQ8.1.5.10	The eUICC needs to support the PIN attributes specified: <ul style="list-style-type: none"> <li>- PINs enabled: in this case the PIN shall be enabled.</li> <li>- PIN may be changed: PIN change allowed; otherwise not.</li> <li>- PIN state change not allowed: Means that status of the PIN may not be altered.</li> <li>- Disabled PIN may not be enabled.</li> <li>- Enabled PIN may not be disabled.</li> </ul>
RQ8.1.5.11	It shall be possible to create all possible global PINs within the global PE-PINCodes.
RQ8.1.5.12	It shall be possible to create all second Application PINs within one or more DFs.
RQ8.1.5.13	Two local PINs which have been created separately in two DFs with the same second application PIN ID shall have a separate status; own remaining attempts; own verified status; own enabled/disable status; also different attributes may be applied for the two PINs.
RQ8.1.5.14	PIN Values shall have a length of 8 bytes. Unused bytes are to be padded with FF..FF.
RQ8.1.5.15	It shall be possible to define any value for any PIN: Random Hex Values and also coded as string for user PINs (e.g. PIN 1234 > 31 32 33 34 FF FF FF FF).
RQ8.1.5.16	It shall be possible to assign a PUK value for any PIN.
RQ8.1.5.16b	It shall be possible to assign any PUK value for any PIN. This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.5.17	maxNumOfAttempts-retryNumLeft: It shall be possible to assign any value from 0...F for maxNumberAttempts and retryNumLeft independent from each other.
RQ8.1.5.18	It shall be possible to create any PIN in enabled or disabled mode.
RQ8.1.5.19	It shall be possible to create any PIN with "PIN state change not allowed" stated to define that a PIN status cannot be changed from enabled to disabled and vice versa.
RQ8.1.5.20	It shall be possible to define any PIN with "PIN can be changed" set to allow changing the PIN value; if "PIN can be changed" is not set it shall not be possible to change the PIN.
RQ8.1.5.21	It is allowed to define the same PINKeyReferenceValue in multiple directories (e.g. secondPINApp1 may be defined in the ISIM NAA and within the USIM NAA). Provided they are not linked they shall be handled as two independent PIN values which also may reference different PUK references.



RQ8.1.5.22	For IoT Minimal Profile, if PIN Code PE containing pinAppl1(1) is not explicitly included in the Profile Package, default PIN shall be created automatically by the eUICC with the following details: • For Global PIN: pinAppl1(1) – pinValue '31313131FFFFFFFF'H, pinAttributes 6, maxNumOfAttempts-retryNumLeft '33'H This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.5.23	For IoT Minimal Profile, if ADM1 is not explicitly included in the Profile Package, it shall be created automatically by the eUICC using a random value and set in blocked state. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.5.24	For Full Profiles, the PUK Code PE shall be used only once in the profile Package, right after the creation of the MF
RQ8.1.5.25	For IoT minimal Profiles, the PUK Code PE may be used only once in the profile Package, right after IoT minimal Profile header. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.5.26	For IoT Minimal Profile, if PIN Code PE containing secondPINAppl1 (129) is not explicitly included in the Profile Package, default PIN shall be created automatically by the eUICC with the following details: • For the ADF USIM: secondPINAppl1(129) – pinValue '31313131FFFFFFFF'H, pinAttributes 7, maxNumOfAttempts-retryNumLeft '33'H This REQ is applicable from SA PP TS v3.3.1 onwards.
NOTE1: Testing of RQ8.1.5.4, RQ8.1.5.11, RQ8.1.5.12, RQ8.1.5.19 is out of scope. NOTE2: VOID NOTE3: RQ8.1.5.15, RQ8.1.5.23 is not testable. NOTE4: RQ8.1.5.14 is related to the format of the types used in the profile package. The ASN1 converter ensures compliance when the profile package is created. NOTE5: RQ8.1.5.1b, RQ8.1.5.2b, RQ8.1.5.2e, RQ8.1.5.5, RQ8.1.5.24, RQ8.1.5.25 are related to the format of the profile package. These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly formatted profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.	

### 8.1.6 Security domains

The test requirements are extracted from section 8.6 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.6.1	The PE Security Domain shall consist of a PE header and an Application Instance object.
RQ8.1.6.2	The values standardised for Supplementary SDs shall be used for the Application Instance object.
RQ8.1.6.3	The PE Security Domain may consist of a keylist and sdPersoData objects.
RQ8.1.6.4	The PE-SecurityDomain shall be used for every SD creation, starting from MNO-SD.
RQ8.1.6.5	The MNO-SD shall be defined and created explicitly using "PE-SecurityDomain" within the Profile Package.
RQ8.1.6.6	The MNO-SD shall be created first before any other SD, before any RFM Parameters are set, or before any applets are created.
RQ8.1.6.7	Since no package AID nor classAID is standardised for the MNO-SD, it MAY use the values defined for supplementary SD creation in section 3.3.1.1 of [GP CIC].
RQ8.1.6.8	The first SD within the sequence of the Profile Package shall be categorised as the MNO-SD by definition.
RQ8.1.6.9	The MNO-SD shall be installed with the special MNO-SD privileges defined by the GSMA.
RQ8.1.6.10	All subsequent following instances of SDs shall be installed like regular supplementary SDs as known from GlobalPlatform Card Specification [GP CS].
RQ8.1.6.11	The keylist optionally present in the Security Domain PE shall be a sequence of key objects.
RQ8.1.6.12	VOID
RQ8.1.6.12b	A key object shall contain a keyUsageQualifier, tag number [21] which shall be an OCTET STRING with SIZE of 1 to 2. Note: This REQ is applicable from SA PP TS v2.1 onwards
RQ8.1.6.13	The keyAccess, tag number [22] shall be an OCTET STRING with SIZE of 1, DEFAULT 00.
RQ8.1.6.14	A key object shall contain a keyIdentifier, tag number [2] which shall be an OCTET STRING with SIZE of 1.
RQ8.1.6.15	A key object shall contain a keyVersionNumber, tag number [3] which shall be an OCTET STRING with SIZE of 1.
RQ8.1.6.16	A key object shall contain a list of keyComponents.
RQ8.1.6.17	A keyComponent shall contain a keyType, tag number [0], which shall be an OCTET STRING.
RQ8.1.6.18	A keyComponent shall contain a keyData which shall be an OCTET STRING.
RQ8.1.6.19	VOID
RQ8.1.6.20	A key object may contain a keyCounterValue, tag number [5] which shall be an OCTET STRING.
RQ8.1.6.20a	If the keyCounterValue is present, it indicates the initial counter associated for that keyset.
RQ8.1.6.20b	If the keyCounterValue is absent, the initial counter value shall be set according to the default value of the related protocol (e.g. for SCP02 keyset the default value is '0000'h, for SCP03 it is '000000'h, for SCP80 it is '000000000000'h).
RQ8.1.6.21	VOID
RQ8.1.6.22	Each key to be personalised shall be listed only once.
RQ8.1.6.23	VOID
RQ8.1.6.24	VOID
RQ8.1.6.25	VOID
RQ8.1.6.26	Only keyTypes defined in GlobalPlatform Card Specification [GP CS], Table 11-16, may be part of the list of keyComponents.
RQ8.1.6.26b	Any key or key component with one of these key types (including ECC keys) shall be defined using KeyObject.
RQ8.1.6.27	Each keyComponent shall be specified only once per key (e.g. including the same keyType twice within one KeyObject will lead to an error).
RQ8.1.6.28	In case the sdPersoData is present it shall be a sequence of OCTET STRINGs each containing the data field of a STORE DATA command used to personalise the SD.
RQ8.1.6.29	The content of the data field of the STORE DATA command shall not be encrypted and shall use DGI format.
RQ8.1.6.30	The complete DGI structure for the SD personalisation shall be sent in one complete byte array.
RQ8.1.6.31	Each DGI shall be provided in its own sdPersoData record.
RQ8.1.6.32	Only standardised DGIs, according to GlobalPlatform Card Specification [GP CS], shall be sent when addressing a SD.
RQ8.1.6.33	Installation of the CASD, if required inside a Profile, shall use the same personalisation procedure as defined for SDs.
RQ8.1.6.34	In case RAM and OTA HTTPs is added to a SD the settings can be configured according to GlobalPlatform Card Specification [GP CS] and ETSI specifications.
RQ8.1.6.35	In case RAM is added to a SD the TAR values for RAM can be configured as follows: - Bytes 13-15 of the SD instance AID. - TAR List within SD install parameters.
RQ8.1.6.36	VOID

RQ8.1.6.36a	The eUICC shall support settings for OTA HTTPs provided within the sdPersoData included in DGI '0070' using in tag '85' according to GlobalPlatform Amd B [GP AB] (Section 3.7.1 TLV: Security Domain Administration Session Parameters) in the PE-SecurityDomain structure of the respective security domain.
RQ8.1.6.36b	The eUICC may support settings for the DNS Resolution mechanism provided within the sdPersoData as described in GlobalPlatform Amd B [GP AB] in the PE-SecurityDomain structure of the respective security domain..
RQ8.1.6.37	If RAM is added to a SD the security level for RAM shall be defined by the MSL parameter of the SD installation parameters.
RQ8.1.6.38	VOID
RQ8.1.6.38a	If RAM is added to a SD, TAR values to the Security Domains as specified in TS 101 220 [101 220] should be assigned.
RQ8.1.6.39	The configuration of the PoR (Proof of Receipt) handling shall not be part of the Profile definition.
RQ8.1.6.40	The eUICC shall follow the latest ETSI and 3GPP release to provide the necessary level of security.
RQ8.1.6.41	There may be SSDs which belong to independent SD hierarchies with a self-extradited SSD as root SD.
RQ8.1.6.42	The macLength shall be an UInt8 DEFAULT 8.
RQ8.1.6.43	If macLength is for AES KID keys, indicates the length of the MAC in bytes as defined in TS 102 226 [102 226].
RQ8.1.6.44	macLength shall be ignored for other key types than AES KID.
RQ8.1.6.45	If keyType or any other KeyObject parameters are not supported by the eUICC, the error code feature-not-supported shall be returned and the installation of the Profile Package shall be aborted.
RQ8.1.6.46	Parameters using TLV format may be included in DGI '0070' as defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.6.47	keyUsageQualifier and keyAccess shall be ignored for SCP80 and SCP81 keys. Note: This REQ is applicable from SA PP TS v2.1 onwards.
RQ8.1.6.48	ECC Curve Parameters shall be defined using sdPersoData. DGIs described in GlobalPlatform Card Specification [GP CS] section 11.11.4.2.2.1 shall be coded in immediately consecutive sdPersoData objects.
RQ8.1.6.49	If keyType or any other KeyObject parameters are not supported by the Security Domain (Example: KeyObject not related to Secure Channel Protocol listed in the applicationSpecificParametersC9 or with the applicationPrivileges given in the ApplicationInstance of the Security domain), the error code feature-not-supported may be returned and the installation of the Profile Package may be aborted by the eUICC. Note: This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.6.50	The PE Security Domain may consist of a cattpParameters object.
RQ8.1.6.51	A cattpParameters shall contain a cattpMaxSduSize which shall be UInt16.
RQ8.1.6.52	A cattpParameters shall contain a cattpMaxPduSize which shall be UInt16.
RQ8.1.6.53	Only the PE-SecurityDomain that instantiates the MNO-SD may include the cattpParameters parameter: this parameter is forbidden for the other Security Domains.
RQ8.1.6.54	The PE Security Domain may consist of an openPersoData object.
RQ8.1.6.55	The openPersoData may consist of a restrictParameter object (see [GP CS] §11.5.2.3.7) which shall be an OCTET STRING.
RQ8.1.6.55b	The Restrict parameter octet string is encoded as the one-byte value defined in [GP CS] §11.5.2.3.7 Table 11-53. Note: This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.6.56	The openPersoData may consist of a contactlessProtocolParameters object (see [GP AC] §11.2) which shall be an OCTET STRING.
RQ8.1.6.56b	Only the following parameters are supported in contactlessProtocolParameters: <ul style="list-style-type: none"> <li>o 'Initial Contactless Activation State', (see [GP AC] §8.3).</li> <li>o 'Contactless protocol Type State', (see [GP AC] §11.2.4)</li> <li>o 'Protocol Data type A', (see [GP AC] §4.6)</li> <li>o 'Protocol Data type B', (see [GP AC] §4.7)</li> <li>o 'Protocol Data type F', (see [GP AC] §4.8)</li> <li>o 'Continuous Processing' (see [GP AC] §6.4)</li> </ul>
RQ8.1.6.56c	Only the following parameters are supported in contactlessProtocolParameters: <ul style="list-style-type: none"> <li>o 'Initial Contactless Activation State', (see [GP AC] §8.3).</li> <li>o 'Contactless protocol Type State', (see [GP AC] §11.2.4)</li> <li>o 'Protocol Data type A', (see [GP AC] §4.6)</li> <li>o 'Protocol Data type B', (see [GP AC] §4.7)</li> <li>o 'Protocol Data type F', (see [GP AC] §4.8)</li> <li>o 'Continuous Processing' (see [GP AC] §6.4)</li> <li>o 'Contactless Protocol Parameters Profile' (see [GP AC] §11.2.2)</li> </ul> Note: This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.6.57	Only the PE-SecurityDomain that instantiates the MNO-SD may include the openPersoData parameter, this parameter is forbidden for the other Security Domains.

RQ8.1.6.58	If no openPersoData parameters are present, default values apply as defined in the [GP CS] and [GP AC] specification.
RQ8.1.6.59	The profile openPersoData parameters shall apply only when the profile is enabled.
RQ8.1.6.60	If the eUICC doesn't support the Restrict parameter and this parameter is present in the Profile Package, the error code feature-not-supported shall be returned and the installation of the Profile Package shall be aborted by the eUICC.
RQ8.1.6.61	To configure the Access Domain DAP and the Toolkit Parameter DAP as specified in TS 102 226 [102 226], the key with Key Identifier '02' and Key Version Number '11' shall be set in the MNO-SD; in case the key is set, Access Domain DAP and the Toolkit Parameter DAP presence is mandatory for all INSTALL [for INSTALL] commands. DAP verification shall not apply during the installation of the Profile Package on the eUICC. Note: This REQ is applicable from SA PP TS v3.2 onwards.
RQ8.1.6.62	The eUICC may use vendor specific values and shall not abort the profile download because of the values for package AID and class AID provided in the profile for the MNO-SD. Note: This REQ is applicable from SA PP TS v3.2 onwards.
RQ8.1.6.63	The processData may be used to personalise a Security Domain.
RQ8.1.6.64	Within each SD, the settings for one or more SCP11 options can be configured according to GlobalPlatform Card Specification Amendment F [GP AF] by means of "processData" parameter within "ApplicationInstance". Note: This REQ is applicable from SA PP TS v3.2 onwards.
RQ8.1.6.65	If scp11ac Service is supported by the eUICC, the eUICC shall support the following STORE DATA: <ul style="list-style-type: none"> <li>• STORE DATA (ECKA Certificate) Command</li> <li>• STORE DATA (Whitelist) Command</li> <li>• STORE DATA (CA-KLOC Identifier) Command</li> </ul> Note: This REQ is applicable from SA PP TS v3.2 onwards.
RQ8.1.6.66	The presence of Security Domains, in particular the MNO-SD, in the Profile shall be in line with the specifications referencing SA PP TS. This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.6.67	The cumulativeGrantedVolatileMemory is optional and it shall be OCTET STRING.
RQ8.1.6.68	The cumulativeGrantedVolatileMemory shall be coded according to Contactless Specific Parameters as defined in GlobalPlatform Amd. C [GP AC].
RQ8.1.6.69	The cumulativeGrantedNonVolatileMemory is optional and it shall be OCTET STRING.
RQ8.1.6.70	The cumulativeGrantedNonVolatileMemory shall be coded according to Contactless Specific Parameters as defined in GlobalPlatform Amd. C [GP AC].
<p>NOTE 1: RQ8.1.6.9 is not tested in this specification. Its verification is under the scope of the GSMA.</p> <p>NOTE 2: Testing of RQ8.1.6.33, RQ8.1.6.43, RQ8.1.6.44, RQ8.1.6.47, RQ8.1.6.50, RQ8.1.6.54, RQ8.1.6.55, RQ8.1.6.55b, RQ8.1.6.56, RQ8.1.6.56b, RQ8.1.6.56c, RQ8.1.6.57, RQ8.1.6.58, RQ8.1.6.59, RQ8.1.6.60 is FFS.</p> <p>NOTE 3: RQ8.1.6.20, RQ8.1.6.20a, RQ8.1.6.39, RQ8.1.6.49, RQ8.1.6.53 are not testable.</p> <p>NOTE 4: RQ8.1.6.32 is not tested in this specification. Its verification is under the scope of GlobalPlatform.</p> <p>NOTE 5: RQ8.1.6.8, RQ8.1.6.22, RQ8.1.6.32, RQ8.1.6.40 and RQ8.1.6.66 are out of scope of this specification.</p> <p>NOTE 6: RQ8.1.6.1, RQ8.1.6.2, RQ8.1.6.11, RQ8.1.6.12b, RQ8.1.6.13, RQ8.1.6.14, RQ8.1.6.15, RQ8.1.6.16, RQ8.1.6.17, RQ8.1.6.18, RQ8.1.6.28, RQ8.1.6.42, RQ8.1.6.51, RQ8.1.6.52 are related to the format of the types used in the profile package, or mandate some fields to be used in the profile package. The ASN1 converter ensures compliance when the profile package is created.</p> <p>NOTE 7: RQ8.1.6.26, RQ8.1.6.29, RQ8.1.6.30, RQ8.1.6.31 are related to the format of the profile package. . These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.</p>	

### 8.1.7 Application loading and installation

The test requirements are extracted from section 8.7 of "eUICC Profile Package: Interoperable Format Technical Specification" [SA PP TS].

RQ8.1.7.1	A library shall be loaded when only an ApplicationLoadPackage object is provided within one Application PE.
RQ8.1.7.2	A preloaded application shall be installed only when an ApplicationInstance object is provided within one Application PE.
RQ8.1.7.3	Multiple instances of the same application shall be installed when multiple ApplicationInstance objects are provided within one Application PE.
RQ8.1.7.4	An application shall be loaded providing an ApplicationLoadPackage object and installed via an ApplicationInstance .
RQ8.1.7.5	An application shall be installed when an ApplicationInstance object is provided within one Application PE.
RQ8.1.7.6	If PEHeader object is set to mandatory, profile installation shall fail if one of the subsequent elements cannot be executed (e.g. load fails because of API incompatibility, install fails because of duplicate TAR values ...).
RQ8.1.7.7	If PEHeader object is not set to mandatory, profile installation will continue with the next PE if one of the subsequent elements cannot be executed, except when defined differently in [SA PP TS] Section 8.11. .
RQ8.1.7.8	The loadPackageAID object shall be based on the GP2.2 Load Command according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.9	The loadPackageAID object is mandatory and shall be an ApplicationIdentifier.
RQ8.1.7.10	The securityDomainAID object shall be based on the GP2.2 Load Command according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.11	The securityDomainAID object is optional and shall be an ApplicationIdentifier.
RQ8.1.7.12	The nonVolatileCodeLimitC6 object shall be based on the GP2.2 Load Command according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.13	The nonVolatileCodeLimitC6 object is optional and it shall be an OCTET STRING.
RQ8.1.7.14	The volatileDataLimitC7 object shall be based on the GP2.2 Load Command according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.15	The volatileDataLimitC7 object is optional and it shall be an OCTET STRING.
RQ8.1.7.16	The nonVolatileDataLimitC8 object shall be based on the GP2.2 Load Command according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.17	The nonVolatileDataLimitC8 object is optional and it shall be an OCTET STRING.
RQ8.1.7.18	The hashValue object shall be based on the GP2.2 Load Command according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.19	The hashValue object is optional and it shall be an OCTET STRING.
RQ8.1.7.20	The loadBlockObject object shall contain the complete load block.
RQ8.1.7.21	The loadBlockObject object is mandatory and it shall be an OCTET STRING.
RQ8.1.7.22	The coding of applicationLoadPackageAID object shall follow the coding defined for Install for Install defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.23	The applicationLoadPackageAID object is mandatory and shall be an ApplicationIdentifier.
RQ8.1.7.24	The coding of classAID object shall follow the coding defined for Install for Install defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.25	The classAID object is mandatory and shall be an ApplicationIdentifier.
RQ8.1.7.26	The coding of instanceAID object shall follow the coding defined for Install for Install defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.27	The instanceAID object is mandatory and shall be an ApplicationIdentifier.
RQ8.1.7.28	The extraditeSecurityDomainAID object shall have the same effect as the Install for Extradition command defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.29	The extraditeSecurityDomainAID object is optional and shall be an ApplicationIdentifier.
RQ8.1.7.30	If the extraditeSecurityDomainAID object value is not provided, the instance shall be associated to the MNO-SD by default.
RQ8.1.7.31	The coding of applicationPrivileges object shall follow the coding defined for Install for Install defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.32	The applicationPrivileges object is mandatory and it shall be an OCTET STRING.
RQ8.1.7.33	The coding of lifeCycleState object shall follow the coding Life Cycle State defined within GlobalPlatform Card Specification [GP CS] (section 11.1.1 Life Cycle Coding).
RQ8.1.7.34	VOID
RQ8.1.7.34a	The lifeCycleState object is optional for the Profile Package and it shall be an OCTET STRING. If not provided the default value SELECTABLE ('07'H) shall be assigned.
RQ8.1.7.34b	If the lifeCycleState object is provided the provided value shall be assigned.
RQ8.1.7.34c	For an SD, none of GlobalPlatform's "Automatic Transition" mechanisms apply during Profile Package installation, the SDs life cycle state is always the value of the "lifeCycleState" parameter. As a consequence, the eUICC shall ignore tag '84' as defined in GlobalPlatform Card Specification UICC Configuration [GP UC] during Profile Package installation. Note: This REQ is applicable from SA PP TS v3.1 onwards.

RQ8.1.7.35	The coding of applicationSpecificParametersC9 object shall follow the coding defined for Install for Install defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.36	The applicationSpecificParametersC9 object is mandatory and it shall be an OCTET STRING.
RQ8.1.7.37	The coding of systemSpecificParameters object shall follow the coding defined for Install for Install defined by GlobalPlatform Card Specification [GP CS].
RQ8.1.7.38	The systemSpecificParameters object is optional and it shall be an ApplicationSystemParameters.
RQ8.1.7.39	The coding of applicationParameters object shall follow the coding defined in ETSI TS 102 226 [102 226].
RQ8.1.7.40	The applicationParameters object is optional and it shall be an UICCApplicationParameters.
RQ8.1.7.41	The applicationParameters can be used to define the access domain for an applet.
RQ8.1.7.42	The applicationParameters can be used to define the MSL (Minimum Security Level) for an applet or an RFM instance.
RQ8.1.7.43	The processData object is optional and it shall be a SEQUENCE OF OCTET STRING.
RQ8.1.7.44	The processData object octet string shall be directly sent to the respective application instance for processing through the "processData" method of the "Application" or "Personalization" interface of the application.
RQ8.1.7.45	The processData object may contain all the bytes contained in a STORE DATA command (Including CLA,INS, P1, P2, L) if required by the application but encryption shall not be used.  Note: This test specification will consider this as mandatory otherwise it is not predictable.
RQ8.1.7.46	The processData object shall contain data for the application and no decryption shall be performed by the respective SD.
RQ8.1.7.47	The volatileMemoryQuotaC7 is optional and it shall be an OCTET STRING.
RQ8.1.7.48	The nonvolatileMemoryQuotaC8 is optional and it shall be an OCTET STRING.
RQ8.1.7.49	The globalServiceParameters is optional and it shall be an OCTET STRING.
RQ8.1.7.50	The implicitSelectionParameter is optional and it shall be an OCTET STRING.
RQ8.1.7.51	The volatileReservedMemory is optional and it shall be an OCTET STRING.
RQ8.1.7.52	The nonVolatileReservedMemory is optional and it shall be an OCTET STRING.
RQ8.1.7.53	The ts102226SIMFileAccessToolkitParameter is optional and it shall be an OCTET STRING.
RQ8.1.7.54	The ts102226AdditionalContactlessParameters is optional and it shall be a TS102226AdditionalContactlessParameters.
RQ8.1.7.55	The uiccToolkitApplicationSpecificParametersField is optional and it shall be an OCTET STRING.
RQ8.1.7.56	The uiccAccessApplicationSpecificParametersField is optional and it shall be an OCTET STRING.
RQ8.1.7.57	VOID
RQ8.1.7.58	The uiccAdministrativeAccessApplicationSpecificParametersField is optional and it shall be an OCTET STRING.
RQ8.1.7.59	The protocolParameterData is mandatory and it shall be OCTET STRING.
RQ8.1.7.60	The processData object shall be provided to the respective applet instance, with the supported processData method according to GlobalPlatform Card Specification [GP CS].
RQ8.1.7.61	The Application PE shall be used after the security domain to which the application instance is associated to is created by using PE-SecurityDomain.
RQ8.1.7.62	In case no value for the optional parameter securityDomainAID is provided, the package will be associated to the MNO-SD by default.
RQ8.1.7.63	The contactlessProtocolParameters is optional and it shall be OCTET STRING.
RQ8.1.7.64	The contactlessProtocolParameters indicating Type A Protocol shall be coded according to Contactless Protocol Parameters Structure as defined in GlobalPlatform Amd. C [GP AC].
RQ8.1.7.64b	The contactlessProtocolParameters indicating Type B Protocol shall be coded according to Contactless Protocol Parameters Structure as defined in GlobalPlatform Amd. C [GP AC].
RQ8.1.7.64c	The contactlessProtocolParameters indicating Type F Protocol shall be coded according to Contactless Protocol Parameters Structure as defined in GlobalPlatform Amd. C [GP AC].
RQ8.1.7.65	The userInteractionContactlessParameters is optional and it shall be OCTET STRING
RQ8.1.7.66	The userInteractionContactlessParameters shall be coded according to User Interaction Parameters Structure as defined in GlobalPlatform Amd. C [GP AC].
RQ8.1.7.67	The protocolParameterData indicating the reader mode protocol data Type A shall be encoded according to ETSI TS 102 226 [102 226].
RQ8.1.7.67b	The protocolParameterData indicating the reader mode protocol data Type B shall be encoded according to ETSI TS 102 226 [102 226].
RQ8.1.7.68	The whole PE should be discarded, if the processData object is provided in the PE, but the application does not implement the "processData" method. The eUICC may abort the Profile Package installation if it cannot recover the error.
RQ8.1.7.69	An application (or SD) shall only be associated to an SD in Life Cycle State PERSONALIZED. Note: This REQ is applicable from SA PP TS v2.1 onwards

---

RQ8.1.7.69b	If an application (or SD) is associated to an SD in Life Cycle State different from PERSONALIZED, the error code invalid-parameter shall be returned and the installation of the Profile Package shall be aborted. Note: This REQ is applicable from SA PP TS v2.1 onwards
-------------	--

NOTE1: VOID

NOTE2: RQ8.1.7.2, RQ8.1.7.7, RQ8.1.7.68 are not testable.

NOTE3: RQ8.1.7.9, RQ8.1.7.21, RQ8.1.7.23, RQ8.1.7.25, RQ8.1.7.27, RQ8.1.7.32, RQ8.1.7.36, RQ8.1.7.59 are related to the format of the types used in the profile package, or mandate some fields to be used in the profile package. The ASN1 converter ensures compliance when the profile package is created.

NOTE4: RQ8.1.7.8, RQ8.1.7.10, RQ8.1.7.12, RQ8.1.7.14, RQ8.1.7.16, RQ8.1.7.20, RQ8.1.7.22, RQ8.1.7.24, RQ8.1.7.26, RQ8.1.7.31, RQ8.1.7.33, RQ8.1.7.35, RQ8.1.7.37, RQ8.1.7.39, RQ8.1.7.45, RQ8.1.7.46, RQ8.1.7.61, RQ8.1.7.64 and RQ8.1.7.66 are related to the format of the profile. These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.

### 8.1.8 RFM Parameters

The test requirements are extracted from section 8.8 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.8.1	RFM Parameters PE shall appear after PE containing the related SD.
RQ8.1.8.1b	RFM Parameters PE shall appear after PE containing the related ADF.
RQ8.1.8.2	RFM Parameters PE is optional and may be used several times.
RQ8.1.8.3	The securityDomainAID object is optional. If present an RFM instance shall be associated with the referenced SD. If not present, the RFM instance shall be associated with the MNO-SD.
RQ8.1.8.4	A RFM instance shall be addressable with given TAR values.
RQ8.1.8.5	A RFM instance shall be associated with at most one ADF.
RQ8.1.8.6	RFM Parameters PE shall contain PEHeader object.
RQ8.1.8.7	If securityDomainAID is present it shall be ApplicationIdentifier type, tag 15.
RQ8.1.8.8	RFM Parameters may contain tarList. If tarList is present it shall be a sequence of OCTET STRING of size 3, tag 0.
RQ8.1.8.8a	tarList shall include at least one TAR if available.
RQ8.1.8.8b	If tarList is not available the TAR value defined within bytes 13-15 of the instanceAID is used.
RQ8.1.8.8c	The specification of a TAR value is optional and, if absent (i.e. no "tarList" is provided and the TAR value is not defined within the "instanceAID"), the RFM instance cannot be addressed via protocols that require TAR address (e.g. SCP80). This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.8.9	RFM Parameters shall contain minimumSecurityLevel of OCTET STRING of size 1, tag 1.
RQ8.1.8.10	The Minimum Security Level (MSL) for the RFM instance shall be interpreted according to ETSI TS 102 226.
RQ8.1.8.11	RFM Parameters shall contain uiccAccessDomain of OCTET STRING of variable size.
RQ8.1.8.12	RFM Parameters shall contain uiccAdminAccessDomain field of OCTET STRING of variable size.
RQ8.1.8.13	RFM Parameters may contain adfRFMAccess of ADFRFMAccess type.
RQ8.1.8.14	ADFRFMAccess object shall contain adfAID of ApplicationIdentifier type.
RQ8.1.8.15	ADFRFMAccess object shall contain adfAccessDomain of OCTET STRING of variable size.
RQ8.1.8.16	ADFRFMAccess object shall contain adfAdminAccessDomain of OCTET STRING of variable size.
RQ8.1.8.17	If adfRFMAccess is not provided, the RFM instance shall be linked only to the MF.
RQ8.1.8.18	If adfRFMAccess is provided, corresponding ADF shall be selected by default in the context of an RFM script.
RQ8.1.8.19	If adfRFMAccess is not provided, the MF shall be selected by default in the context of an RFM script.
RQ8.1.8.20	RFM Parameters PE shall contain instanceAID of ApplicationIdentifier type, tag 15.
NOTE1: Testing of RQ8.1.8.5, RQ8.1.8.6, RQ8.1.8.8b, RQ8.1.8.10 is out of scope of this specification.	
NOTE2: VOID	
NOTE3: RQ8.1.8.1 and RQ8.1.8.1b are related to the format of the profile package. These requirements are tested with a correctly formatted profile to make sure that the eUICC is able to handle a correctly formatted profile package. The eUICC behaviour in case of a badly formatted profile package is undefined according to [SA PP TS] v2.1 and above, so negative testing is not possible.	
NOTE4: RQ8.1.8.7, RQ8.1.8.8, RQ8.1.8.8a, RQ8.1.8.9, RQ8.1.8.11, RQ8.1.8.12, RQ8.1.8.14, RQ8.1.8.15, RQ8.1.8.16 and RQ8.1.8.20 are related to the format of the types used in the profile package, or mandate some fields to be used in the profile package. The ASN1 converter ensures compliance when the profile package is created.	
NOTE5: RQ8.1.8.8c is not testable.	

### 8.1.9 Non standardised content

The test requirements are extracted from section 8.9 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.9.1	The Profile Package can use as many PE-NonStandard profile elements as required.
RQ8.1.9.2	PE-NonStandard shall contain a “nonstandard-header” object. The type of the “nonstandard-header” object is PEHeader.
RQ8.1.9.3	PE-NonStandard shall contain an “issuerID” object. The type of the issuerID shall be OBJECT IDENTIFIER.
RQ8.1.9.4	PE-NonStandard shall contain “content” object. The type of the content shall be OCTET STRING.
Note; RQ8.1.9.1, RQ8.1.9.2, RQ8.1.9.3 and RQ8.1.9.4 are out of scope of this specification.	



### 8.1.10 Profile Package end

The test requirements are extracted from section 8.10 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.10.1	The PE-End shall contain an “end-header” object. The type of the “end-header” object is PE Header.
RQ8.1.10.2	The support of PE-End is mandatory for eUICC.
RQ8.1.10.3	The PE shall be used as the last element of the Profile Package.

#### **8.1.11 eUICC Response type**

The test requirements are extracted from section 8.11 and 9.5.2 of “eUICC Profile Package: Interoperable Format Technical Specification” [SA PP TS].

RQ8.1.11.1	EUICCResponse object shall contain peStatus field of SEQUENCE OF PESTatus type.
RQ8.1.11.2	EUICCResponse object may contain profileInstallationAborted field of NULL type.
RQ8.1.11.2a	When profileInstallationAborted is used, it shall be present in the last EUICCResponse sent by the eUICC.
RQ8.1.11.3	EUICCResponse object may contain statusMessage field of UTF8String type.
RQ8.1.11.3b	If present, statusMessage field shall be from 2 to 64 Unicode code points long inclusive. Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.11.4	PEStatus object shall contain status field of INTEGER type.
RQ8.1.11.5	PEStatus object may contain identification field of Uint15 type.
RQ8.1.11.6	The identification field, if present, shall indicate the identification number of the PE triggering the error.
RQ8.1.11.7	VOID
RQ8.1.11.7a	The identification field shall be present if EUICCResponse contains an error status except the following cases: - error status is reported for Profile Header - no identification field is provided in the PE Header
RQ8.1.11.8	PEStatus object may contain additional-information field of Uint8 type.
RQ8.1.11.9	EUICCResponse with ok status shall be sent at the end of the profile installation when the Profile has been processed successfully, and only if there is nothing to report. Note: This REQ is applicable up to SA PP TS v2.1.
RQ8.1.11.9a	In case the eUICC has not aborted the installation of the Profile Package after processing the PE-End, a EUICCResponse ending with a PESTatus containing the ok status code shall be sent. Note: This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.11.10	EUICCResponse with ok status shall not indicate any PE identification.
RQ8.1.11.11	EUICCResponse with PE-not-supported status indicates that a specific PE is not supported by the eUICC.
RQ8.1.11.12	EUICCResponse with PE-not-supported status shall include profileInstallationAborted tag if an unsupported PE is indicated as "mandated".
RQ8.1.11.12a	If the PE generating PE-not-supported status does not indicate "mandated" in the PE header this status is a warning status and the installation of the Profile shall be continued.
RQ8.1.11.12b	The eUICC shall abort profile installation if PE-not-supported error is triggered by any of following PEs: - PE-IoT - PE-OPT IoT  Note: This REQ is applicable from SA PP TS v3.3.1 onwards.
RQ8.1.11.13	EUICCResponse with memory-failure status indicates profile installation failure due to internal memory issue.
RQ8.1.11.13a	If memory-failure is reported, the eUICC shall abort profile installation.
RQ8.1.11.14	EUICCResponse with bad-values status indicates that at least one value in the PE identified by its identification number is out of its acceptable value range.
RQ8.1.11.14a	VOID
RQ8.1.11.14b	If the PE generating bad-values status indicates "mandated" in the PE header and the eUICC cannot apply a default value, this status is an error status and the processing of the Profile shall be aborted. Note: This REQ is applicable for SA PP TS v2.1.
RQ8.1.11.14c	If the PE generating bad-values status does not indicate "mandated" in the PE header this status is a warning status and the installation of the Profile shall be continued. Note: This REQ is applicable for SA PP TS v2.1.
RQ8.1.11.14d	If the PE generating bad-values status indicates "mandated" in the PE header this status is an error status and the processing of the Profile shall be aborted. Note: This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.11.14e	If the PE generating bad-values status does not indicate "mandated" in the PE header this status is a warning status and the installation of the Profile should be aborted. Note: This REQ is applicable from SA PP TS v2.2 onwards.
RQ8.1.11.15	EUICCResponse with not-enough-memory status indicates that eUICC does not have enough free memory to install the Profile.
RQ8.1.11.15a	If the eUICC runs out of memory during processing PE-MF, it shall abort profile installation.
RQ8.1.11.15b	VOID
RQ8.1.11.15c	If eUICC does not have enough free memory to install the Profile the processing of the Profile shall be aborted. Note: This REQ is applicable from SA PP TS v2.1 onwards.

RQ8.1.11.16	<p>EUICCResponse with <code>invalid-request-format</code> indicates that a structure in a PE is unknown or badly formatted, or that the order of the PEs is invalid .</p> <p>Note: It is not required that the eUICC is able to detect and reject all invalid formats, or all the incorrect order of the PEs.</p>
RQ8.1.11.16a	VOID (Note: combined with RQ8.1.1.16)
RQ8.1.11.16b	VOID
RQ8.1.11.16c	<p>The eUICC shall abort profile installation if <code>invalid-request-format</code> error is triggered by any of following PEs:</p> <ul style="list-style-type: none"> <li>- Profile Header</li> <li>- PE-AKA-Parameters</li> <li>- PE-CSIM-Parameters</li> <li>- PE-PIN-Code</li> <li>- PE-PUK-Code</li> <li>- PE-Security-Domain</li> <li>- PE-RFM-Parameters</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.1 onwards.</p>
RQ8.1.11.16d	<p>The eUICC may abort profile installation in case <code>invalid-request-format</code> error is triggered by any of following PEs and the eUICC is not able to recover the error by ignoring some non-mandatory parts of the Profile, or for any other reason:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1 .</p>
RQ8.1.11.16e	<p>The eUICC should abort profile installation in case <code>invalid-request-format</code> error is triggered by any of following PEs and the eUICC is not able to recover the error by ignoring some non-mandatory parts of the Profile, or for any other reason:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- Generic File Management</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>

RQ8.1.11.16f	<p>The eUICC should abort profile installation in case <code>invalid-request-format</code> error is triggered by any of following PEs and the eUICC is not able to recover the error by ignoring some non-mandatory parts of the Profile, or for any other reason:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- Generic File Management</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.3.1 onwards.</p>
RQ8.1.11.17	<p>EUICCResponse with <code>invalid-parameter</code> indicates that a parameter in a PE description is not supported.</p>
RQ8.1.11.17a	VOID
RQ8.1.11.17b	<p>The <code>invalid-parameter</code> status code shall be used when the eUICC encounters an unknown tag inside a PE.</p> <p>Note: This REQ is applicable from SA PP TS v2.1.</p>
RQ8.1.11.17c	<p>The eUICC shall abort profile installation if <code>invalid-parameter</code> error is triggered by any of following PEs:</p> <ul style="list-style-type: none"> <li>- Profile Header</li> <li>- PE-AKA-Parameters</li> <li>- PE-CSIM-Parameters</li> <li>- PE-PIN-Code</li> <li>- PE-PUK-Code</li> <li>- PE-Security-Domain</li> <li>- PE-RFM-Parameters</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.1 onwards.</p>
RQ8.1.11.17d	<p>The eUICC shall abort profile installation if <code>invalid-parameter</code> error is triggered by any of following PEs, and the PE triggering the error indicates "mandated" in the PE header and the eUICC cannot ignore the parameter which triggers the error:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>

RQ8.1.11.17e	<p>The eUICC shall abort profile installation if <code>invalid-parameter</code> error is triggered by any of following PEs, and the PE triggering the error indicates "mandated" in the PE header:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- Generic File Management</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.17f	<p>The eUICC should abort profile installation and shall ignore the parameter if <code>invalid-parameter</code> error is triggered by any of following PEs, and the PE triggering the error does not indicate "mandated" in the PE header:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- Generic File Management</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.17g	<p>The eUICC shall abort profile installation if <code>invalid-parameter</code> error is triggered by any of following PEs, and the PE triggering the error indicates "mandated" in the PE header:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- Generic File Management</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.3.1 onwards.</p>

RQ8.1.11.17h	<p>The eUICC should abort profile installation and shall ignore the parameter if invalid-parameter error is triggered by any of following PEs, and the PE triggering the error does not indicate "mandated" in the PE header:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- Generic File Management</li> <li>- PE Application</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.2 onwards.</p>
RQ8.1.11.18	<p>EUICCResponse with runtime-not-supported status indicates that the runtime environment required by the "eUICC-Mandatory-services" in the Profile Header, or by the application present in a "PE-Application" is not supported by the eUICC.</p>
RQ8.1.11.18a	<p>If an unsupported runtime environment is requested by a PE with "mandated" flag set the eUICC shall abort profile installation.</p>
RQ8.1.11.18b	<p>If an unsupported runtime environment is requested by a PE without "mandated" flag, this is just a warning and the installation of the Profile shall continue and the application shall be ignored.</p> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.18c	<p>If an unsupported runtime environment is requested by a PE without "mandated" flag, the installation of the Profile should be aborted and the application shall be ignored.</p> <p>Note: This REQ is applicable from SA PP TS v2.2. onwards</p>
RQ8.1.11.18d	<p>If the PE generating this status is the Profile Header, this status is an error status and the processing of the Profile shall be aborted.</p>
RQ8.1.11.19	<p>EUICCResponse with lib-not-supported status indicates that a library indicated in the "eUICC-Mandatory-AIDs" list in the Profile Header, or required by an application present in a PE-Application is not available in the eUICC.</p>
RQ8.1.11.19a	<p>If a missing library is requested by a PE with "mandated" flag set the eUICC shall abort profile installation.</p>
RQ8.1.11.19b	<p>If a missing library is requested by a PE without "mandated" flag set this is just a warning and the installation of the Profile shall continue and the application shall be ignored.</p> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.19c	<p>If a missing library is requested by a PE without "mandated" flag set, the installation of the Profile should be aborted and the application shall be ignored.</p> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.19d	<p>If the PE generating this status is the Profile Header, this status is an error status and the processing of the Profile shall be aborted.</p>
RQ8.1.11.20	<p>EUICCResponse with template-not-supported status indicates that the template indicated by the OBJECT IDENTIFIER in the templateID or in the eUICC-Mandatory-GFSTEList is not available in the eUICC (i.e. non-standard template or template version not supported).</p>
RQ8.1.11.20a	<p>VOID</p>
RQ8.1.11.20b	<p>If the eUICC sends template-not-supported error indicating that one, or more of the file system templates identified in the Profile Header is not supported the eUICC shall abort profile installation.</p>
RQ8.1.11.20c	<p>If a file system template PE triggering the template-not-supported error has "mandated" flag set the eUICC shall abort profile installation.</p>

RQ8.1.11.20d	<p>The eUICC shall abort profile installation if <code>template-not-supported</code> error is triggered by any of following PEs:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.20e	<p>For the PE-s listed below if a PE triggering the <code>template-not-supported</code> error has “mandated” flag set, the eUICC shall abort profile installation:</p> <ul style="list-style-type: none"> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.20f	<p>For the PE-s listed below if a PE triggering the <code>template-not-supported</code> error has no “mandated” flag set, the installation of the Profile shall continue and the file system described by this PE shall not be created:</p> <ul style="list-style-type: none"> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.20g	<p>The eUICC shall abort profile installation if <code>template-not-supported</code> error is triggered by any of following PEs:</p> <ul style="list-style-type: none"> <li>- PE-MF</li> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- EAP</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.20h	<p>For the PE-s listed below if a PE triggering the <code>template-not-supported</code> error has “mandated” flag set, the eUICC shall abort profile installation:</p> <ul style="list-style-type: none"> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.20i	<p>For the PE-s listed below if a PE triggering the <code>template-not-supported</code> error has no “mandated” flag set, the installation of the Profile shall continue and the file system described by this PE shall not be created:</p> <ul style="list-style-type: none"> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2.onwards</p>



RQ8.1.11.20j	<p>For the PE-s listed below if a PE triggering the template-not-supported error has “mandated” flag set, the eUICC shall abort profile installation:</p> <ul style="list-style-type: none"> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- PE-EAP</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.3.1 onwards.</p>
RQ8.1.11.20k	<p>For the PE-s listed below if a PE triggering the template-not-supported error has no “mandated” flag set, the installation of the Profile shall continue and the file system described by this PE shall not be created:</p> <ul style="list-style-type: none"> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- PE-EAP</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.3.1 onwards</p>
RQ8.1.11.21	<p>EUICCResponse with <i>feature-not-supported</i> status indicates that a feature included in the PE, or in the ServicesList of the Profile Header is not supported by the eUICC.</p>
RQ8.1.11.22	<p><i>feature-not-supported</i> status shall be sent if Optional USIM EFs PE contains any of EF GBABP, EF MSK, EF MUK, EF GBANL and EF NAFKCA and respective services are not supported at the eUICC operating system level.</p> <p>In this case, PEStatus object shall contain additional-information field set to ‘1’ if GBA is not supported, to ‘2’ if MBMS if not supported and ‘3’ if both are not supported.</p>
RQ8.1.11.22a	VOID
RQ8.1.11.22b	<p>The eUICC shall abort profile installation if the <i>feature-not-supported</i> error is triggered by Profile Header (the eUICC does not support a feature included in the ServiceList of the Profile Header).</p>
RQ8.1.11.22c	<p>The eUICC shall abort profile installation if <i>feature-not-supported</i> error is triggered by any of following PEs:</p> <ul style="list-style-type: none"> <li>- PE-AKA Parameters</li> <li>- PE-CSIM Parameters</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.1 onwards.</p>

RQ8.1.11.22d	<p>For the PE-s listed below if a PE triggering the <i>feature -not-supported</i> error has “mandated” flag set the eUICC shall abort profile installation:</p> <ul style="list-style-type: none"> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- PE Generic File Management</li> <li>- PE Security Domain</li> <li>- PE Application</li> <li>- PE RFM Parameters</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.22e	<p>For the PE-s listed below if a PE triggering the <i>feature -not-supported</i> error has no “mandated” flag set the installation of the Profile shall continue and the feature shall be ignored:</p> <ul style="list-style-type: none"> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- PE Generic File Management</li> <li>- PE Security Domain</li> <li>- PE Application</li> <li>- PE RFM Parameters</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable for SA PP TS v2.1.</p>
RQ8.1.11.22f	<p>For the PE-s listed below if a PE triggering the <i>feature -not-supported</i> error has “mandated” flag set the eUICC shall abort profile installation:</p> <ul style="list-style-type: none"> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- PE Generic File Management</li> <li>- PE Security Domain</li> <li>- PE Application</li> <li>- PE RFM Parameters</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>

RQ8.1.11.22g	<p>For the PE-s listed below if a PE triggering the feature -not-supported error has no “mandated” flag set the installation of the Profile shall continue and the feature shall be ignored:</p> <ul style="list-style-type: none"> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- PE Generic File Management</li> <li>- PE Security Domain</li> <li>- PE Application</li> <li>- PE RFM Parameters</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.22h	<p>For PE OPT USIM, files EF GBABP, EF MSK, EF MUK, EF GBANL and EF NAFKCA are associated with services which require support at the eUICC operating system level. So, even if indicated in the profile, the creation of these files shall be skipped by the eUICC if these functionalities are not supported by the eUICC framework.</p>
RQ8.1.11.22i	<p>For PE OPT USIM, the bits related to the GBA and MBMS services in the EF UST shall be cleared by the eUICC if it does not support the services.</p> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.22j	<p>For the PE-s listed below if a PE triggering the feature -not-supported error has “mandated” flag set the eUICC shall abort profile installation:</p> <ul style="list-style-type: none"> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- PE Generic File Management</li> <li>- PE Security Domain</li> <li>- PE Application</li> <li>- PE RFM Parameters</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.3.1 onwards.</p>

RQ8.1.11.22k	<p>For the PE-s listed below if a PE triggering the feature -not-supported error has no "mandated" flag set the installation of the Profile shall continue and the feature shall be ignored:</p> <ul style="list-style-type: none"> <li>- DF-CD</li> <li>- DF-TELECOM</li> <li>- PE USIM</li> <li>- PE OPT USIM</li> <li>- DF-GSM-ACCESS</li> <li>- DF-PHONEBOOK</li> <li>- DF 5GS</li> <li>- DF SAIP</li> <li>- DF SNPN</li> <li>- DF 5G PROSE</li> <li>- PE-IoT</li> <li>- PE-OPT IoT</li> <li>- PE ISIM</li> <li>- PE OPT ISIM</li> <li>- PE CSIM</li> <li>- PE OPT CSIM</li> <li>- EAP</li> <li>- PE Generic File Management</li> <li>- PE Security Domain</li> <li>- PE Application</li> <li>- PE RFM Parameters</li> <li>- PE Non Standardized</li> </ul> <p>Note: This REQ is applicable from SA PP TS v3.3.1 onwards.</p>
RQ8.1.11.23	<p>EUICCResponse with <code>unsupported-profile-version</code> status indicates that the major version indicated in the Profile Header is not supported by the eUICC.,</p>
RQ8.1.11.23a	<p>EUICCResponse with <code>unsupported-profile-version</code> status is an error status and the processing of the Profile shall be aborted.</p>
RQ8.1.11.24	<p>VOID</p>
RQ8.1.11.25	<p>If the installation of the Profile is aborted EUICCResponse shall contain <code>profileInstallationAborted</code> tag.</p>
RQ8.1.11.26	<p>EUICCResponse with <code>pin-code-missing</code> indicates that at least one rule of "PE-PINCodes and pinStatusTemplateDO usage rules" is not satisfied. It is optional for the eUICC to support this status.</p> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.27	<p>EUICCResponse with <code>pin-code-missing</code> status is an error status and the processing of the Profile shall be aborted.</p> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.28	<p>PEStatus object may contain <code>offset</code> field of Uint31 type.</p> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.29	<p>The <code>offset</code> field can be used by the eUICC in order to indicate the part of the PE generating a specific status. This value gives the approximate number of bytes from the beginning of the PE to the element generating the status.</p> <p>Note: This REQ is applicable from SA PP TS v2.2 onwards.</p>
RQ8.1.11.30	<p>In case the eUICC aborts the Profile installation, it shall return an "offset".</p> <p>Note: This REQ is applicable from SA PP TS v3.2 onwards.</p>
<p>NOTE 1: RQ8.1.11.1 is implicitly tested everytime UICC response with PESTatus is sent.</p> <p>NOTE 2: Testing of RQ8.1.11.20c, RQ8.1.11.20d, RQ8.1.11.20e, RQ8.1.11.20f, RQ8.1.11.20g, RQ8.1.11.20h, RQ8.1.11.20i, is FFS.</p> <p>NOTE3: RQ8.1.11.3, RQ8.1.11.8, RQ8.1.11.11, RQ8.1.11.12, RQ8.1.11.12a, RQ8.1.11.12b, RQ8.1.11.13, RQ8.1.11.13a, RQ8.1.11.14, RQ8.1.11.14b, RQ8.1.11.14c, RQ8.1.11.14d, RQ8.1.11.14e, RQ8.1.11.15a, RQ8.1.11.17c, RQ8.1.11.17f, RQ8.1.11.17h, RQ8.1.11.18, RQ8.1.11.18a, RQ8.1.11.18b, RQ8.1.11.18c, RQ8.1.11.22c are not testable.</p> <p>NOTE4: RQ8.1.11.19b and RQ8.1.11.19c are out of scope</p> <p>NOTE 5: RQ8.1.11.3b is tested everytime eUICC response contains statusMessage.</p>	

## 8.1.12 SUCI Calculation by USIM

RQ8.1.12.1	The USIM application shall select the protection scheme from its supported schemes that has the highest priority in "Protection Scheme Identifier List data object". Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.2	If there is no supported protection scheme or if the Home Network Public Key for the selected protection scheme is not correctly formatted, the USIM Application shall generate an error in response to the GET_IDENTITY command. Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.3a	The USIM shall generate a SUCI using "null-scheme" only in the following cases: • if the home network has configured "null-scheme" to be used, or Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.3b	• if no Home Network Public Key is associated to the selected protection scheme (i.e. if the KeyIndex is "0", no key list is provided or the index is pointing to a non existing key). Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.4	The USIM application shall select the Home Network Public Key matching the protection scheme selected from "Protection Scheme Identifier List data object". Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.5	From ETSI TS 102 221 V16.0.0 and 3GPP TS 31.130 V15.2.0 the SUCI calculation is performed by the USIM when the services n°124 and n°125 are indicated as available in the EF UST of the USIM NAA. Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.6a	The service 130 in the UST and the AID of the USIM NAA define if the SUPI used to calculate SUCI is based on IMSI or not, for a given USIM application: • the USIM NAA is a 3GPP USIM (non-IMSI SUPI Type) (see [101 220]) and service n°130 is available: the SUPI Type shall be a non-IMSI SUPI Type (NAI format, i.e. NSI or GCI or GLI) Note: This REQ is applicable from SA PP TS v3.1 onwards.
RQ8.1.12.6b	• the USIM NAA is a 3GPP USIM (see [101 220]) and service n°130 is not available, the SUPI Type shall be a IMSI SUPI Type. Note: This REQ is applicable from SA PP TS v3.1 onwards.
RQ8.1.12.7a	The USIM NAA may perform this SUCI calculation in 2 different ways: • From a USIM NAA SUCI calculation application registered to the SUCI interface (uicc.usim.suci.SUCIRegistry in [31.130]). Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
RQ8.1.12.7b	• From a default USIM NAA SUCI calculation system application: This system application shall be automatically available for a USIM NAA when the service "SUCI calculation by USIM" is available in the EF UST (service n°124 and service n°125 are available). Note: This REQ is applicable from SA PP TS v2.3.1 onwards.
NOTE1: testing of RQ8.1.12.2 is FFS.	
NOTE2: testing of RQ8.1.12.7a is out of scope.	

## 8.2 Test cases / scenarios

### 8.2.1 Check Profile Format

8.2.1.1. VOID

8.2.1.2. Installing profile with PE-USIM before PE-MF, eUICC reports error.

8.2.1.2.1. *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-1	6.14.1.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.1.2.2. *Initial Conditions*

None.

### 8.2.1.2.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.16
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of USIM-by-Generic-File-Management-1</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of USIM-by-Generic-File-Management-1</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of USIM-by-Generic-File-Management-1</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.16 RQ8.1.11.16d RQ8.1.11.16e RQ8.1.11.16f RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.1.3. Installing profile with PE-Application before PE-SecurityDomain, eUICC reports error.

#### 8.2.1.3.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-Application-1	6.14.12.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-Application-1	6.14.12.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.1.3.2. Initial Conditions

None.

#### 8.2.1.3.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.1.36b RQ8.1.6.6
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of PE-Application-1USIM-by-Generic-File-Management-1</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-Application-1</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-Application-1</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.16 RQ8.1.11.16d RQ8.1.11.16e RQ8.1.11.16f RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	



#### 8.2.1.4. Installing profile with PE-RFM before PE-SecurityDomain, eUICC reports error.

##### 8.2.1.4.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-RFM-1	6.14.13.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-RFM-1	6.14.13.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-END-1	6.14.14.1

##### 8.2.1.4.2. Initial Conditions

None.

##### 8.2.1.4.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.1.37 RQ8.1.6.6 RQ8.1.8.1
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>○ invalid-request-format (5), OR</li> <li>○ different from (0)</li> </ul> </li> <li>• identification of PE-RFM-1</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1:</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.16 RQ8.1.11.16c RQ8.1.11.25 RQ8.1.11.30

		<p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> </ul> <p>identification of PE-RFM-1 The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>invalid-request-format (5), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-RFM-1</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

## 8.2.2 Check Profile Header

### 8.2.2.1. Error when cat-tp in ServicesList and eUICC does not support CAT\_TP

#### 8.2.2.1.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-13	6.14.1.13
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-13-v3	6.14.1.40
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.2.1.2. Initial Conditions

None.

#### 8.2.2.1.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10.	RQ7.1.1.7 RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12  RQ8.1.2.1 RQ8.1.2.2 RQ8.1.2.3b
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>different from (0)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1 : eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.21 RQ8.1.11.22b RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.2.2. Error when package in eUICC-Mandatory-AIDs is not known

#### 8.2.2.2.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-14	6.14.1.14
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-14-v3	6.14.1.41
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.2.2.2. Initial Conditions

None.

#### 8.2.2.2.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10.	RQ7.1.1.7 RQ8.1.2.20 RQ8.1.2.21

2	eUICC → T	<p>If TCA_VERSION is 3.1, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>lib-not-supported (8)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>lib-not-supported (8)</li> </ul> </li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.4 RQ8.1.11.7a RQ8.1.11.19 RQ8.1.11.19d RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.2.3. Error when version in eUICC-Mandatory-AIDs is not supported

#### 8.2.2.3.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-15	6.14.1.15
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-15-v3	6.14.1.42
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.2.3.2. Initial Conditions

None.

### 8.2.2.3.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10.	RQ7.1.1.7 RQ8.1.2.20 RQ8.1.2.22
2	eUICC → T	<p>If TCA_VERSION is 3.1, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>◦ lib-not-supported (8)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>◦ lib-not-supported (8)</li> </ul> </li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.4 RQ8.1.11.7a RQ8.1.11.19 RQ8.1.11.19d RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

**8.2.2.4.** No error when package and version in eUICC-Mandatory-AIDs is known and supported

**8.2.2.4.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-16	6.14.1.16
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-16-v3	6.14.1.43
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.2.4.2.** *Initial Conditions*

None.

### 8.2.2.4.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ7.1.1.7 RQ8.1.2.20
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present SW='9000'.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

### 8.2.2.5. No error when profileType is of maximum length (Latin symbols)

#### 8.2.2.5.1 Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-28	6.14.1.55
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1



**Profile Package v3:**

Test PE name	Reference
Profile-Header-28-v3	6.14.1.56
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

*8.2.2.5.2 Initial Conditions*

None.

*8.2.2.5.3 Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ7.1.1.7 RQ8.1.2.20
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	

Futher requirements related to Profile Header are tested in 8.2.3 and 8.2.11.

## 8.2.3 Check File System

### 8.2.3.1. Installing USIM files by generic file management

#### 8.2.3.1.1. *Test execution*

##### Profile Package v2:

Test PE name	REFERENCE
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CD-by-Generic-File-Management-1	6.14.2.2.2
DF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	REFERENCE
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CD-by-Generic-File-Management-1	6.14.2.2.2
DF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.1.2. *Initial Conditions*

None.

#### 8.2.3.1.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13b RQ8.1.1.14 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3  RQ8.1.3.6  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.21 RQ8.1.3.22
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content	RQ8.1.3.15 RQ8.1.3.21
6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.21 RQ8.1.3.22
7	T ↔ eUICC	Read all files in DF CD and verify their content	RQ8.1.3.15 RQ8.1.3.21
8	T ↔ eUICC	Select all files in DF CUSTOM and verify their FCPs.	RQ8.1.3.21 RQ8.1.3.22
9	T ↔ eUICC	Read all files in DF CUSTOM and verify their content	RQ8.1.3.15 RQ8.1.3.21
10	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.21 RQ8.1.3.22
11	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content	RQ8.1.3.15 RQ8.1.3.21
12	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs.	RQ8.1.3.21 RQ8.1.3.22
13	T ↔ eUICC	Read all files in OPT USIM and verify their content	RQ8.1.3.15 RQ8.1.3.21

### 8.2.3.2. Installing USIM files by template

#### 8.2.3.2.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.2.2. *Initial Conditions*

None.

## 8.2.3.2.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted objecteUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
7	T ↔ eUICC	Read all files in DF CD and verify their content	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16

8	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in DF TELECOM and verify their content	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
10	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
11	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOCI and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
12	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs When Profile Package v2 is installed only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1. When Profile Package v3 is installed only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1-v2.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
13	T ↔ eUICC	Read all files in OPT USIM and verify their content	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.3. Installing USIM files by template with OPT-USIM-2

#### 8.2.3.3.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-2	6.14.5.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2	6.14.5.2.3
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-2-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2-v2	6.14.5.2.7
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.3.3.2. Initial Conditions**

None.

**8.2.3.3.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted objecteUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17



6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
7	T ↔ eUICC	Read all files in DF CD and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
8	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in DF TELECOM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
10	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
11	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOC1 and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
12	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-2 When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-2-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
13	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

#### 8.2.3.4. Installing USIM files by template with BER-TLV files in the ServicesList

##### 8.2.3.4.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-5	6.14.1.5
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-2	6.14.2.3.2
PE-USIM-by-Template-4	6.14.5.1.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-5-v3	6.14.1.32
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-2-v2	6.14.2.3.6
PE-USIM-by-Template-4-v2	6.14.5.1.14
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### 8.2.3.4.2. Initial Conditions

None.

## 8.2.3.4.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7  RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16

7	T ↔ eUICC	Read all files in DF CD and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
8	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in DF TELECOM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
10	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	
11	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOCI and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
12	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1. When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1-v2.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
13	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

#### 8.2.3.5. Error when installing PE-USIM when eUICC does not support USIM

##### 8.2.3.5.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.5.2. Initial Conditions

None.

#### 8.2.3.5.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10.	RQ7.1.1.7 RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12  RQ8.1.2.1 RQ8.1.2.3b
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>different from (0)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.21 RQ8.1.11.22b RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

**8.2.3.6.** Warning when installing USIM files by template with BER-TLV files in a non mandatory PE when eUICC does not support BER-TLV

**8.2.3.6.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-3	6.14.2.3.3
PE-USIM-by-Template-4	6.14.5.1.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-2-v3	6.14.1.28
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-3-v2	6.14.2.3.7
PE-USIM-by-Template-4-v2	6.14.5.1.14
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.3.6.2.** *Initial Conditions*

None.

## 8.2.3.6.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ7.1.1.5  RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC response contains a PEStatus (10) feature-not-supported and identification of PE-TELECOM-by-Template-3 and no additional-information object. eUICC response contains no profileInstallationAborted object.	RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.21 RQ8.1.11.22e RQ8.1.11.22g
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16

7	T ↔ eUICC	Read all files in DF CD and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
8	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs. ef-ice-graphics, ef-mml and ef-mmdf shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16 RQ8.1.2.17
9	T ↔ eUICC	Read all files in DF TELECOM and verify their content except ef-ice-graphics, ef-mml and ef-mmdf which files shall not be present	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16 RQ8.1.2.17
10	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
11	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOC1 and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
12	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1. When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1-v2.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
13	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16



**8.2.3.7.** Warning when creating a DF with dfLink in a non mandatory PE when eUICC does not support dfLink.

**8.2.3.7.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.3
DF-CUSTOM-by-Generic-File-Management-2	6.14.2.4.2
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
DF-CUSTOM-by-Generic-File-Management-2	6.14.2.4.2
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.3.7.2.** *Initial Conditions*

None.

**8.2.3.7.3.** *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10 .	RQ7.1.1.5 RQ8.1.3.5
2	eUICC → T	eUICC response with PESTatus containing status (10) feature-not-supported and identification of DF-CUSTOM-by-Generic-File-Management-2 and no additional-information object. eUICC response contains no profileInstallationAborted object	RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.21 RQ8.1.11.22e RQ8.1.11.22g

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF TELECOM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
6	T ↔ eUICC	Select DF LINK (fileID '7FA1'), as defined in DF-CUSTOM-by-Generic-File-Management-2 and verify that it does not exist e.g. SW '6A82'.	RQ8.1.2.17
7	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
8	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOCI and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4

#### 8.2.3.8. VOID

#### 8.2.3.9. Creating a DF with dfLink when eUICC supports dfLink and dfLink is in ServicesList.

##### 8.2.3.9.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-6	6.14.1.6
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CD-by-Generic-File-Management-1	6.14.2.2.2
DF-CUSTOM-by-Generic-File-Management-3	6.14.2.4.3
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-6-v3	6.14.1.33
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CD-by-Generic-File-Management-1	6.14.2.2.2
DF-CUSTOM-by-Generic-File-Management-3	6.14.2.4.3
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.3.9.2. Initial Conditions**

None.

## 8.2.3.9.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13b RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3  RQ8.1.3.6  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC response with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF CD and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
6	T ↔ eUICC	Select DF LINK (fileID '7FA1') and verify its FCP, as defined in DF-CUSTOM-by-Generic-File-Management-3.	
7	T ↔ eUICC	Select all files in DF LINK (fileID '7FA1') as defined in the DF-CD-by-Generic-File-Management-1 and verify their FCP.	
8	T ↔ eUICC	Read all files in DF LINK (fileID '7FA1') and verify their content	

### 8.2.3.10. Installing CSIM files by template

#### 8.2.3.10.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-8	6.14.1.8
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-1	6.14.7.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-1	6.14.7.2.1
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-8-v3	6.14.1.35
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-1-v2	6.14.7.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-1-v2	6.14.7.2.3
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.10.2. *Initial Conditions*

None.

#### 8.2.3.10.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.18 RQ8.1.1.23 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.4.15 RQ8.1.4.17 RQ8.1.4.18 RQ8.1.4.18a RQ8.1.4.19 RQ8.1.4.19a RQ8.1.4.20 RQ8.1.4.20a  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in ADF CSIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17

7	T ↔ eUICC	Read all files in ADF CSIM except the EF CST and verify their.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
8	T ↔ eUICC	Select all files in OPT CSIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-CSIM-by-Template-1 When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-CSIM-by-Template-1-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in OPT CSIM except the EF EST and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.11. Installing ISIM files by template

#### 8.2.3.11.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-9	6.14.1.9
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-2	6.14.5.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2	6.14.5.2.3
PE-AKAPParameters-1	6.14.9.1
PE-ISIM-by-Template-1	6.14.6.1.1
PE-OPT-ISIM-by-Template-1	6.14.6.2.1
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-ISIM	6.14.13.3
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-9-v3	6.14.1.36
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-2-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2-v2	6.14.5.2.7
PE-AKAPParameters-1	6.14.9.1
PE-ISIM-by-Template-2	6.14.6.1.2
PE-OPT-ISIM-by-Template-1-v2	6.14.6.2.2
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-ISIM	6.14.13.3
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

8.2.3.11.2. *Initial Conditions*

None.



## 8.2.3.11.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.17 RQ8.1.1.22 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.2 RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17

5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
7	T ↔ eUICC	Read all files in DF CD and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
8	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in DF TELECOM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
10	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
11	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOC1 and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
12	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-2 When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-2-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
13	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
14	T ↔ eUICC	Select all files in ADF ISIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
15	T ↔ eUICC	Read all files in ADF ISIM except the EF IST and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17

16	T ↔ eUICC	Select all files in OPT ISIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-ISIM-by-Template-1 When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-ISIM-by-Template-1-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
17	T ↔ eUICC	Read all files in OPT ISIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.12. Installing USIM files by template without content

#### 8.2.3.12.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-2	6.14.5.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-3	6.14.5.2.4
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-2-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-3-v2	6.14.5.2.8
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.12.2. Initial Conditions

None.

### 8.2.3.12.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF GID1 and EF GID2 from OPT USIM and verify their FCPs.	
5	T ↔ eUICC	Read EF GID1 and EF GID2 in OPT USIM and verify that EF GID1 and EF GID2 are created with content "FFFFFFFFFFFFFFFF"	RQ8.1.3.18b

### 8.2.3.13. Creating file instances with and without explicitly set file ID

#### 8.2.3.13.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-2	6.14.2.2.3
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-2	6.14.2.2.3
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.3.13.2. Initial Conditions**

None.

**8.2.3.13.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select the three instances of EF ICON in DF CD and verify their FCPs. The file ID of the 2 <sup>nd</sup> instance of EF ICON shall be set to "6F41" The file ID of the 3 <sup>rd</sup> instance of EF ICON shall be set to "6F80"	RQ8.1.3.11 RQ8.1.3.11b
5	T ↔ eUICC	Read the three instances of EF ICON in DF CD and verify their content.	

### 8.2.3.14. Error when installing PE-CSIM when eUICC does not support CSIM

#### 8.2.3.14.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-8	6.14.1.8
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-1	6.14.7.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-1	6.14.7.2.1
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-8-v3	6.14.1.35
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-1-v2	6.14.7.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-1-v2	6.14.7.2.3
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.14.2. Initial Conditions

None.

### 8.2.3.14.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10.	RQ7.1.1.7
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>different from (0)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.21 RQ8.1.11.22b RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.3.15. Installing GSM-ACCESS files by template

#### 8.2.3.15.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-17	6.14.1.18
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-5	6.14.5.1.7
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-GSM-ACCESS-by-Template-1	6.14.5.3.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-17-v3	6.14.1.44
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-5-v2	6.14.5.1.15
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-GSM-ACCESS-by-Template-1	6.14.5.3.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

8.2.3.15.2. *Initial Conditions*

None.

8.2.3.15.3. *Test Procedure*



Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.20 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.2 RQ8.1.2.3 RQ8.1.2.4 RQ8.1.2.6 RQ8.1.2.8 RQ8.1.2.9 RQ8.1.2.12 RQ8.1.2.13 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T ↔ eUICC	Select all files in DF GSM ACCESS and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
6	T ↔ eUICC	Read all files in DF GSM ACCESS and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.16. Installing USIM Phonebook files by template

#### 8.2.3.16.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-18	6.14.1.18
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-Phonebook-by-Template-1	6.14.5.4.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-18-v3	6.14.1.45
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-Phonebook-by-Template-1	6.14.5.4.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.16.2. Initial Conditions

None.

#### 8.2.3.16.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.21 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.2 RQ8.1.2.3 RQ8.1.2.4 RQ8.1.2.6 RQ8.1.2.8 RQ8.1.2.9 RQ8.1.2.12 RQ8.1.2.13 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T ↔ eUICC	Select all files in DF Phonebook and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
6	T ↔ eUICC	Read all files in DF Phonebook and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.17. Installing EAP files by template

#### 8.2.3.17.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-19	6.14.1.19
PE-MF-by-Template-4	6.14.2.1.5
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-EAP-by-Template-1	6.14.2.5.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-19-v3	6.14.1.46
PE-MF-by-Template-4	6.14.2.1.5
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-EAP-by-Template-1	6.14.2.5.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.17.2. *Initial Conditions*

None.

#### 8.2.3.17.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.2 RQ8.1.2.3 RQ8.1.2.4 RQ8.1.2.6 RQ8.1.2.8 RQ8.1.2.9 RQ8.1.2.12 RQ8.1.2.13 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3 RQ8.1.1.40
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOC1 and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4

6	T ↔ eUICC	Select all files in DF EAP and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
7	T ↔ eUICC	Read all files in DF EAP and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

**8.2.3.18.** Error when installing USIM files by template with BER-TLV files in a mandatory PE when eUICC does not support BER-TLV

**8.2.3.18.1.** Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-2	6.14.2.3.2
PE-CD-by-Template-1	6.14.2.2.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-2-v2	6.14.2.3.6
PE-CD-by-Template-1	6.14.2.2.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.3.18.2.** Initial Conditions

None.

**8.2.3.18.3.** Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Test Profile according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION is 3.1, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status feature-not-supported (10)</li> <li>identification of PE-TELECOM-by-Template-2</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status feature-not-supported (10)</li> <li>identification of PE-TELECOM-by-Template-2</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ7.1.1.4 RQ8.1.2.18 RQ8.1.3.2 RQ8.1.3.7 RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.21 RQ8.1.11.22d RQ8.1.11.22f RQ8.1.11.25 RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Test Profile according to 6.11 fail.	

### 8.2.3.19. Installing USIM files by template using proprietaryEFInfo

#### 8.2.3.19.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-21	6.14.1.21
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-6	6.14.5.1.8
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-6-v2	6.14.5.1.16
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.3.19.2. Initial Conditions

None.

### 8.2.3.19.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted objecteUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select and read ef-epsloci in ADF USIM and verify that the content is the same as the default value defined in Section 9.5.1 of [SA PP TS] v2.3	RQ8.1.3.23

### 8.2.3.20. Installing profile with multiple FileManagement elements

#### 8.2.3.20.1. Test execution

#### Profile Package v2:

Test PE name	REFERENCE
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-3	6.14.2.1.7
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CD-by-Generic-File-Management-1	6.14.2.2.2
DF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	REFERENCE
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-3	6.14.2.1.7
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CD-by-Generic-File-Management-1	6.14.2.2.2
DF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1



### 8.2.3.20.2. Initial Conditions

None.

### 8.2.3.20.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.21 RQ8.1.3.22
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.15 RQ8.1.3.21 RQ8.1.3.24

### 8.2.3.21. Installing multiple USIM by template

#### 8.2.3.21.1. Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-23	6.14.1.23
PE-MF-by-Template-5	6.14.2.1.8
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-15	6.14.9.16
PE-USIM-by-Template-7	6.14.5.1.9
PE-PINCodes-Local-PIN-5	6.14.8.5
PE-OPT-USIM-by-Template-4	6.14.5.2.5
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-RFM-4	6.14.13.6
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-23-v3	6.14.1.50
PE-MF-by-Template-5	6.14.2.1.8
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.1
PE-AKAPParameters-15	6.14.9.16
PE-USIM-by-Template-7-v2	6.14.5.1.17
PE-PINCodes-Local-PIN-5	6.14.8.5
PE-OPT-USIM-by-Template-4-v2	6.14.5.2.9
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-RFM-4	6.14.13.6
PE-END-1	6.14.14.1

**8.2.3.21.2.** *Initial Conditions*

None.

## 8.2.3.21.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in DF CD and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16

7	T ↔ eUICC	Read all files in DF CD and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.11 RQ8.1.3.14 RQ8.1.3.16
8	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in DF TELECOM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
10	T ↔ eUICC	Select all files in ADF USIM (AID: A0 00 00 00 87 10 02 FF 33 FF 01 89 00 00 01 00) and verify their FCPs..	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
11	T ↔ eUICC	Read all files in ADF USIM (AID: A0 00 00 00 87 10 02 FF 33 FF 01 89 00 00 01 00) except the EF UST and verify their content. EF EPSLOCI and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
12	T ↔ eUICC	Select all files in OPT USIM belonging to ADF USIM (AID: A0 00 00 00 87 10 02 FF 33 FF 01 89 00 00 01 00) and verify their FCPs. When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1. When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-1-v2.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
13	T ↔ eUICC	Read all files in OPT USIM belonging to ADF USIM (AID: A0 00 00 00 87 10 02 FF 33 FF 01 89 00 00 01 00) and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
14	T ↔ eUICC	Select all files in ADF USIM (AID: A0 00 00 00 87 10 02 00 00 00 00 00 02 00) and verify their FCPs. .	RQ8.1.3.3 RQ8.1.3.9 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
15	T ↔ eUICC	Read all files in ADF USIM (AID: A0 00 00 00 87 10 02 00 00 00 00 00 02 00) except the EF UST and verify their content. EF EPSLOCI and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.9 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17  RQ8.1.3.4
16	T ↔ eUICC	Select all files in OPT USIM belonging to ADF USIM (AID: A0 00 00 00 87 10 02 00 00 00 00 00 02 00) and verify their FCPs. When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-4. When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-4-v2.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
17	T ↔ eUICC	Read all files in OPT USIM belonging to ADF USIM (AID: A0 00 00 00 87 10 02 00 00 00 00 00 02 00) and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.22. Installing ISIM files by version2 template

#### 8.2.3.22.1. *Test execution*

#### Profile Package v3:

Test PE name	Reference
Profile-Header-9-v3	6.14.1.36
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-2-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2-v2	6.14.5.2.7
PE-AKAPParameters-1	6.14.9.1
PE-ISIM-by-Template-2	6.14.6.1.2
PE-OPT-ISIM-by-Template-2-v2	6.14.6.2.3
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-RFM-ISIM	6.14.13.3
PE-END-1	6.14.14.1

#### 8.2.3.22.2. *Initial Conditions*

None.

## 8.2.3.22.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.17 RQ8.1.1.22 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.2 RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PESTatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in ADF ISIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17

5	T ↔ eUICC	Read all files in ADF ISIM except the EF IST and verify the content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in OPT ISIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
7	T ↔ eUICC	Read all files in OPT ISIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.23. Installing TELECOM files by version2 template

#### 8.2.3.23.1. Test execution

#### Profile Package v3:

Test PE name	Reference
Profile-Header-5-v3	6.14.1.32
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-5-v2	6.14.2.3.9
PE-USIM-by-Template-10-v2	6.14.5.1.21
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.23.2. Initial Conditions

None.

### 8.2.3.23.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7  RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF TELECOM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF TELECOM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16



### 8.2.3.24. Creating a DF with linked EF

#### 8.2.3.24.1. Test execution

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-5	6.14.2.4.6
DF-CUSTOM-by-Generic-File-Management-6	6.14.2.4.7
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.24.2. Initial Conditions

None.

#### 8.2.3.24.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13b RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3  RQ8.1.3.6  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3

2	eUICC → T	eUICC response with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select and read the file 7FA0/5FA0/3FA0/2FA1 and verify that its content is the same as defined in DF-CUSTOM-by-Generic-File-Management-5	
5	T ↔ eUICC	Select and read the file 7FA1/6FA1 and verify that its content is the same as the file 7FA0/5FA0/3FA0/2FA1 has	RQ8.1.3.30

### 8.2.3.25. Creating a EF using filePath

#### 8.2.3.25.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-5	6.14.2.4.6
EF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.8
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-5	6.14.2.4.6
EF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.8
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

### 8.2.3.25.2. *Initial Conditions*

None.

## 8.2.3.25.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13b RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3  RQ8.1.3.6  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC response with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select the file 7FA0/5FA0/3FA0/1FA0/0FA1 and verify that its FCP is the same as defined in EF-CUSTOM-by-Generic-File-Management-1	RQ8.1.3.31
5	T ↔ eUICC	Read the file 7FA0/5FA0/3FA0/1FA0/0FA1 and verify that its content is the same as defined in EF-CUSTOM-by-Generic-File-Management-1	RQ8.1.3.31

### 8.2.3.26. Creating a EF using filePath of zero length

#### 8.2.3.26.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-5	6.14.2.4.6
EF-CUSTOM-by-Generic-File-Management-2	6.14.2.4.9
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-5	6.14.2.4.6
EF-CUSTOM-by-Generic-File-Management-2	6.14.2.4.9
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.26.2. *Initial Conditions*

None.

### 8.2.3.26.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13b RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3  RQ8.1.3.6  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC response with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select the file 7FA0/5FA0/3FA0/1FA0/0FA1 and verify that its FCP is the same as defined in EF-CUSTOM-by-Generic-File-Management-2	RQ8.1.3.31
5	T ↔ eUICC	Read the file 7FA0/5FA0/3FA0/1FA0/0FA1 and verify that its content is the same as defined in EF-CUSTOM-by-Generic-File-Management-2	RQ8.1.3.31
6	T ↔ eUICC	Select the file 6FA2 and verify that its FCP is the same as defined in EF-CUSTOM-by-Generic-File-Management-2	RQ8.1.3.31
7	T ↔ eUICC	Read the file 6FA2 and verify that its content is the same as defined in EF-CUSTOM-by-Generic-File-Management-2	RQ8.1.3.31

### 8.2.3.27. Installing 5G files by template

#### 8.2.3.27.1. *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-26	6.14.1.26
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-8	6.14.5.1.10
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1	6.14.5.5.1
PE-SAIP-by-Template-3	6.14.5.6.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.3.27.2. *Initial Conditions*

None.

## 8.2.3.27.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7  RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF 5GS and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF 5GS and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.28. Installing 5G files by version2 template

#### 8.2.3.28.1. *Test execution*

##### Profile Package v3:

Test PE name	Reference
Profile-Header-29-v3	6.14.1.57
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.1
PE-USIM-by-Template-11-v2	6.14.5.1.22
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-2-v2	6.14.5.5.3
PE-SAIP-by-Template-3	6.14.5.6.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.3.28.2. *Initial Conditions*

None.



### 8.2.3.28.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7  RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF 5GS and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF 5GS and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.29. Installing OPT USIM files by version2 template

#### 8.2.3.29.1. *Test execution*

**Profile Package v3:**

Test PE name	Reference
Profile-Header-5-v3	6.14.1.9
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-12-v2	6.14.5.1.23
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-7-v2	6.14.5.2.14
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.29.2. *Initial Conditions*

None.

## 8.2.3.29.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.2 RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17

6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
7	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content. EF EPSLOCI and EF EPSNSC shall not be present.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17 RQ8.1.3.4
8	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-7-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.30. Installing 5G files by version3 template with service 136 available

#### 8.2.3.30.1. *Test execution*

#### Profile Package v3:

Test PE name	Reference
Profile-Header-26-v3	6.14.1.53
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.1
PE-USIM-by-Template-15-v2	6.14.5.1.26
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1-v3	6.14.5.5.5
PE-SAIP-by-Template-3	6.14.5.6.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.3.30.2. *Initial Conditions*

None.

### 8.2.3.30.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7  RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF 5GS and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF 5GS and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.31. Installing LTE Files within USIM and ISIM by template

#### 8.2.3.31.1. Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-32	6.14.1.61
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-17	6.14.5.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2	6.14.5.2.3
PE-GSM-ACCESS-by-Template-1	6.14.5.3.1
PE-AKAPParameters-1	6.14.9.1
PE-ISIM-by-Template-3	6.14.6.1.3
PE-OPT-ISIM-by-Template-3	6.14.6.2.4
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-ISIM	6.14.13.3
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-32-v3	6.14.1.62
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-17-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2-v2	6.14.5.2.7
PE-GSM-ACCESS-by-Template-1	6.14.5.3.1
PE-AKAPParameters-1	6.14.9.1
PE-ISIM-by-Template-4	6.14.6.1.4
PE-OPT-ISIM-by-Template-3-v2	6.14.6.2.5
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-ISIM	6.14.13.3
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.3.31.2. Initial Conditions**

None.

**8.2.3.31.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.17 RQ8.1.1.22 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.2 RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17

5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
7	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
8	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-2 When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-2-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
10	T ↔ eUICC	Select all files in DF GSM ACCESS and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
11	T ↔ eUICC	Read all files in DF GSM ACCESS and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
12	T ↔ eUICC	Select all files in ADF ISIM and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
13	T ↔ eUICC	Read all files in ADF ISIM except the EF IST and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
14	T ↔ eUICC	Select all files in OPT ISIM and verify their FCPs When Profile Package v2 is installed: Only those files shall be present which are explicitly included in PE-OPT-ISIM-by-Template-3 When Profile Package v3 is installed: Only those files shall be present which are explicitly included in PE-OPT-ISIM-by-Template-3-v2	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
15	T ↔ eUICC	Read all files in OPT ISIM and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16



8.2.3.32. Installing 5G files by version4 template, SNPN and 5G PROSE files by template

8.2.3.32.1. *Test execution*

Profile Package v3:

Test PE name	Reference
Profile-Header-37-v3	6.14.1.67
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.1
PE-USIM-by-Template-18-v2	6.14.5.1.26
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-4-v4	6.14.5.5.5
PE-SAIP-by-Template-3	6.14.5.6.3
PE-SNPN-by-Template-1	6.14.5.5.5
PE-5G-PROSE-by-Template-1	6.14.5.6.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.3.32.2. *Initial Conditions*

None.

8.2.3.32.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7  RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.14 RQ8.1.1.15 RQ8.1.1.16 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.5 RQ8.1.5.14  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.8  RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in DF 5GS and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
5	T ↔ eUICC	Read all files in DF 5GS and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
6	T ↔ eUICC	Select all files in DF SNPN and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
7	T ↔ eUICC	Read all files in DF SNPN and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

8	T ↔ eUICC	Select all files in DF 5G PROSE and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16
9	T ↔ eUICC	Read all files in DF 5G PROSE and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.16

### 8.2.3.33. Installing OPT USIM files by version3 template

#### 8.2.3.33.1. *Test execution*

#### Profile Package v3:

Test PE name	Reference
Profile-Header-36-v3	6.14.1.66
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-12-v2	6.14.5.1.23
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-8-v3	6.14.5.2.15
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.3.33.2. *Initial Conditions*

None.

#### 8.2.3.33.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.13a RQ8.1.1.16 RQ8.1.1.19 RQ8.1.1.25 RQ8.1.1.26 RQ8.1.1.26b RQ8.1.1.27 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.33a RQ8.1.1.34 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.3 RQ8.1.2.14 RQ8.1.2.15  RQ8.1.5.1 RQ8.1.5.1a RQ8.1.5.2c RQ8.1.5.5 RQ8.1.5.14 RQ8.1.5.16  RQ8.1.8.1 RQ8.1.8.1b RQ8.1.8.2 RQ8.1.8.8 RQ8.1.8.13  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17
6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs. EF EPSLOC1 and EF EPSNSC shall not be present.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.4

7	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content.	RQ8.1.3.10 RQ8.1.3.17
8	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-8-v3	RQ8.1.3.10 RQ8.1.3.16
9	T ↔ eUICC	Read all files in OPT USIM and verify their content.	RQ8.1.3.10 RQ8.1.3.16

## 8.2.4 Check NAA(s)

### 8.2.4.1. Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE

#### 8.2.4.1.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.4.1.2. Initial Conditions

None.

#### 8.2.4.1.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	

2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 55F328B43577 B9B9 4A9FFAC354DFAFB3'. See Note1	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'. See Note1	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.4 RQ8.1.4.9 RQ8.1.4.14

Note1: the input and output of AUTHENTICATE command is derived from [MILENAGE TEST]

#### 8.2.4.2. Installing PE-AKAPParameters with TUAK and sending AUTHENTICATE

##### 8.2.4.2.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-7	6.14.1.7
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-2	6.14.9.2
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-7-v3	6.14.1.34
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-2	6.14.9.2
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.4.2.2. Initial Conditions

None.

### 8.2.4.2.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 42424242424242424242424242424242 10 608E0F8A8145 FFFF F9A54E6AEAA8618D'. See Note1	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 04 657ACD64 10 D71A1E5C6CAFFE986A26F783E5C78BE1 10 BE849FA2564F869AECEE6F62D4337E72'. SW = '9000'. See Note1	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3b RQ8.1.4.5 RQ8.1.4.14

Note1: the input and output of AUTHENTICATE command is derived from [TUAK TEST]

### 8.2.4.3. Installing PE-AKAPParameters with usim-test-algorithm and sending AUTHENTICATE

#### 8.2.4.3.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-10	6.14.1.10
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-4	6.14.9.5
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-10-v3	6.14.1.37
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-4	6.14.9.5
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### 8.2.4.3.2. Initial Conditions

None.

### 8.2.4.3.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 C905EA893B1D3D7D626EB1E1EE37EC33 10 87D536D9BFC5DF1EC4EEC668FAB7E464'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 10 C904E88A3F183B7A6A67BBEAE23AE23C 10 04E88A3F183B7A6A67BBEAE23AE23CC9 10 E88A3F183B7A6A67BBEAE23AE23CC904'. SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2b RQ8.1.4.3c RQ8.1.4.14

### 8.2.4.4. Installing PE-AKAPParameters with TUAk with 256 bit key and restricted length and sending AUTHENTICATE

#### 8.2.4.4.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-11	6.14.1.11
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-9	6.14.9.10
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-11-v3	6.14.1.38
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-9	6.14.9.10
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1



#### 8.2.4.4.2. Initial Conditions

None.

#### 8.2.4.4.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 0123456789ABCDEF0123456789ABCDEF 10 4929D62245B5 ABCD D94900B0EE2B4C90'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 E9D749DC4EEA0035 10 A4CB6F6529AB17F8337F27BAA8234D47 10 2274155CCF4199D5E2ABCBF621907F90'. SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3b RQ8.1.4.5 RQ8.1.4.9 RQ8.1.4.14

#### 8.2.4.5. Installing PE-AKAPParameters with TUAK with 256 bit key and sending AUTHENTICATE

##### 8.2.4.5.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-11	6.14.1.11
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-5	6.14.9.6
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-11-v3	6.14.1.38
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-5	6.14.9.6
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.4.5.2. Initial Conditions

None.

#### 8.2.4.5.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 0123456789ABCDEF0123456789ABCDEF 18 4929D62245B5 ABCD C0B8C2D4148EC7AA5F1D78A97E4D1D58'. See Note1	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 E9D749DC4EEA0035 10 A4CB6F6529AB17F8337F27BAA8234D47 10 2274155CCF4199D5E2ABCBF621907F90'. SW = '9000'. See Note1	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3b RQ8.1.4.5 RQ8.1.4.9 RQ8.1.4.14

Note1: the input and output of AUTHENTICATE command is derived from [TUAK TEST]

#### 8.2.4.6. Installing PE-AKAPParameters with TUAK with numberOfKeccak and restricted length sending AUTHENTICATE

##### 8.2.4.6.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-11	6.14.1.11
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-10	6.14.9.11
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-11-v3	6.14.1.38
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-10	6.14.9.11
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.4.6.2. Initial Conditions

None.

##### 8.2.4.6.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 C570AAC68CDE651FB1E3088322498BEF 10 3DAFA03D2D0E 297D 0599A0B5F389484B'.	

7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 10 AB548F680361E48D1239C74C51C20902 10 6708A1DD5FE63EAAAC2884EF9F6E4B005 10 249EB1636FCBA040C4B5076F7645AACA'. SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3b RQ8.1.4.5 RQ8.1.4.10 RQ8.1.4.11b RQ8.1.4.14
---	-----------	---	--

#### 8.2.4.7. Installing PE-AKAPParameters with TUAK with numberOfKeccak and sending AUTHENTICATE

##### 8.2.4.7.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-11	6.14.1.11
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-6	6.14.9.7
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-11-v3	6.14.1.38
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-6	6.14.9.7
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.4.7.2. Initial Conditions

None.

##### 8.2.4.7.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	

6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 C570AAC68CDE651FB1E3088322498BEF 28 A2353A07FE09 297D 90D2289ED1CA1C3DBC2247BB480D431AC71D2E4A767 7F6E997CFDDB0CBAD88B7'. See Note1	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 20 D67E6E64590D22EECBA7324AFA4AF4460C93F01B2450 6D6E12047D789A94C867 20 EDE57EDFC57CDFFE1AAE75066A1B7479BBC3837438E 88D37A801CCCC9F972B89 20 48ED9299126E5057402FE01F9201CF25249F9C5C0ED2A FCF084755DAFF1D3999'. SW = '9000'. See Note1	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3b RQ8.1.4.5 RQ8.1.4.10 RQ8.1.4.11b RQ8.1.4.14

Note1: the input and output of AUTHENTICATE command is derived from [TUAK TEST]

#### 8.2.4.8. Error when authCounterMax exceeded

##### 8.2.4.8.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-7	6.14.9.8
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-7	6.14.9.8
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.4.8.2. Initial Conditions

None.

##### 8.2.4.8.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send 1 <sup>st</sup> AUTHENTICATE command with SQN '000000001007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C649377 B9B9 022FE3275BF01411'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.4 RQ8.1.4.12 RQ8.1.4.14
8	T ↔ eUICC	Initialise eUICC according to 6.9	
9		Repeat steps 4-5 above	
10	T → eUICC	Send 2 <sup>nd</sup> AUTHENTICATE command with SQN '000000002007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C64A377 B9B9 0BBE6206A4126634'.	
11	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	
12	T → eUICC	Send 3 <sup>rd</sup> AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 000102030405060708090A0B0C0D0E0F'.	
13	eUICC → T	AUTHENTICATE command fails with error SW '9862' – Authentication error, incorrect MAC.	RQ8.1.4.3
14	T ↔ eUICC	Disable Profile Package according to 6.12.	
15	T ↔ eUICC	Enable Profile Package according to 6.11.	
16		Repeat steps 4-5 above	
17	T → eUICC	Send 4 <sup>th</sup> AUTHENTICATE command with SQN '000000004007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C64C377 B9B9 E74ECB3901D13CA9'.	

18	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	
19	T → eUICC	Send 5 <sup>th</sup> AUTHENTICATE command with SQN '000000005007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C64D377 B9B9 CA7271D09B9912BC'.	
20	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'. OR AUTHENTICATE command fails with error SW '6F00' – authCounterMax exceeded. In this case, skip to step 25. See Note1	RQ8.1.4.13
21	T → eUICC	Send 6 <sup>th</sup> AUTHENTICATE command with SQN '000000006007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C64E377 B9B9 44157554E493F761'.	
22	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'. OR AUTHENTICATE command fails with error SW '6F00' – authCounterMax exceeded. In this case, skip to step 25. See Note1	RQ8.1.4.13
23	T → eUICC	Send 7 <sup>th</sup> AUTHENTICATE command with SQN '000000007007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C64F377 B9B9 BF5507EC0E9454C6'.	
24	eUICC → T	AUTHENTICATE command fails with error SW '6F00' – authCounterMax exceeded. See Note1	RQ8.1.4.13
25	T → eUICC	Send final AUTHENTICATE command with SQN '000000008007': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C640377 B9B9 30625750E8725846'.	
26	eUICC → T	AUTHENTICATE command fails with error SW '6F00' – authCounterMax exceeded.	RQ8.1.4.13

Note1: it is expected that the AUTHENTICATE error '6F00'h will first be returned on the 6th AUTHENTICATE, but first returning it on the 5th or 7th AUTHENTICATE commands is also accepted.

#### 8.2.4.9. Test Milenage PIN verification and defined constants

##### 8.2.4.9.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-8	0
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-8	0
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.4.9.2. Initial Conditions

None.

##### 8.2.4.9.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = '10 9F7C8D021ACCF4DB213CCFF0C7F71A6A 10 5666690B8413 725C A9083CDB9EEA8D0D'.	
6	eUICC → T	AUTHENTICATE command fails with error SW '6982' – security status not satisfied	RQ8.1.4.7



7	T → eUICC	Send VERIFY PIN pinAppl1	
8	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = ' 10 9F7C8D021ACCF4DB213CCFF0C7F71A6A 10 5666690B8413 725C A9083CDB9EEA8D0D.'	
9	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 DAA6DE20020E36BC 10 2D6B88BF7EFB89CC30B67B90C22AB1DF 10 7C74227B13E7E48AE472E14D974FD030' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.11 RQ8.1.4.14

#### 8.2.4.10. Blocked SQN with wrap around deactivated

##### 8.2.4.10.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-11	6.14.9.12
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-11	6.14.9.12
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.4.10.2. Initial Conditions

None.

#### 8.2.4.10.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with SQN 'FFFFFFFFFE7': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 5597639B7C97 B9B9 E22D5F131BB290A1'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.4 RQ8.1.4.10 RQ8.1.4.12 RQ8.1.4.14
8	T → eUICC	Send AUTHENTICATE command with SQN '000000000027': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C648357 B9B9 618CEB2930A55745'.	
9	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E BAE174135BDC3D84FBD1F13F528B' SW = '9000' OR AUTHENTICATE command fails with error SW '6Fxx'	RQ8.1.4.12

#### 8.2.4.11. Testing SQN delta and age limit

##### 8.2.4.11.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-12	6.14.9.13
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-12	6.14.9.13
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.4.11.2. Initial Conditions**

None.

**8.2.4.11.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with SQN '0000000010 07': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C649377 B9B9 022FE3275BF01411'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.4 RQ8.1.4.9 RQ8.1.4.10 RQ8.1.4.12 RQ8.1.4.14
8	T → eUICC	Send AUTHENTICATE command with SQN '0000000210 27' (exceeds delta): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C669357 B9B9 94F171D3D1F4D089'.	
9	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BECB43C 2C80AE0582AE3FC7' SW = '9000'.	RQ8.1.4.12

10	T → eUICC	Send AUTHENTICATE command with SQN '0000000210 07' (within delta): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C669377 B9B9 137626880CBAA079'.	
11	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.12
12	T → eUICC	Send AUTHENTICATE command with SQN '0000000110 06' (exceeds age limit): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C659376 B9B9 B7B092F5DDBF4EE3'.	
13	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BEEB43C E685022180D8A2AB' SW = '9000'.	RQ8.1.4.12
14	T → eUICC	Send AUTHENTICATE command with SQN '0000000110 25' (within age limit): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C659355 B9B9 1B6EFE265B816C4A'.	
15	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.12

#### 8.2.4.12. Test usim-test-algorithm with 32 bit RES length

##### 8.2.4.12.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-10	6.14.1.10
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-13	6.14.9.14
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-10-v3	6.14.1.37
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-13	6.14.9.14
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.4.12.2. Initial Conditions**

None.

**8.2.4.12.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00' P2 = '81' Data = ' 10 E8F9461ADE8CEFDB318B6756F6C62E66 10 1430A70B1996 DF1E E5126AFB1F2636C2'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 04 E8F84419 10 F84419DA89E9DC39826D5DFACB2069E8 10 4419DA89 E9DC39826D5DFACB2069E8F8'. SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2b RQ8.1.4.3c RQ8.1.4.3d RQ8.1.4.14

### 8.2.4.13. Installing PE-CDMAParameters and send COMPUTE IP AUTHENTICATE in Simple IP CHAP Mode

#### 8.2.4.13.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-8	6.14.1.8
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2	6.14.7.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2	6.14.7.2.2
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-8-v3	6.14.1.35
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2-v2	6.14.7.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2-v2	6.14.7.2.4
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.4.13.2. *Initial Conditions*

None.

#### 8.2.4.13.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.4.15 RQ8.1.4.17 RQ8.1.4.18 RQ8.1.4.19 RQ8.1.4.20 RQ8.1.4.18a RQ8.1.4.19a RQ8.1.4.20a

2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the CSIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '00' (CHAP Mode) P2 = '00' Data = '01 00 1122334455667788'  (Data = #CHAP_ID # NAI-Entry-Index #CHAP-Challenge)	
7	eUICC → T	COMPUTE IP AUTHENTICATION command returns CHAP-Response with: Data = '984A6C6E7B8896628750C4930134F298'. SW = '9000'.	

#### 8.2.4.14. Installing PE-CDMAParameters and send COMPUTE IP AUTHENTICATE in HRPD Access Mode

##### 8.2.4.14.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-8	6.14.1.8
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2	6.14.7.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2	6.14.7.2.2
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-8-v3	6.14.1.35
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2-v2	6.14.7.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2-v2	6.14.7.2.4
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

8.2.4.14.2. Initial Conditions

None.

8.2.4.14.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.4.15 RQ8.1.4.17 RQ8.1.4.18 RQ8.1.4.19 RQ8.1.4.20 RQ8.1.4.18a RQ8.1.4.19a RQ8.1.4.20a
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the CSIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '04' (HRPD Access) P2 = '00' Data = '01 1122334455667788'  (Data = #CHAP_ID #CHAP-Challenge)	
7	eUICC → T	COMPUTE IP AUTHENTICATION command returns CHAP-Response with: Data = '984A6C6E7B8896628750C4930134F298'. SW = '9000'.	



### 8.2.4.15. Installing PE-CDMAParameters and send COMPUTE IP AUTHENTICATE in Mobile IP Mode

#### 8.2.4.15.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-8	6.14.1.8
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2	6.14.7.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2	6.14.7.2.2
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-8-v3	6.14.1.35
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2-v2	6.14.7.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2-v2	6.14.7.2.4
PE-CDMAParameters-1	6.14.9.4
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.4.15.2. Initial Conditions

None.

#### 8.2.4.15.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.4.15 RQ8.1.4.17 RQ8.1.4.18 RQ8.1.4.19 RQ8.1.4.20 RQ8.1.4.18a RQ8.1.4.19a RQ8.1.4.20a

2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the CSIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '01' (MN-HA Authenticator) P2 = '02' Data = '00 0102030405060708090A0B0C'  (Data #NAI-Entry-Index #Registration-Data)	
7	eUICC → T	COMPUTE IP AUTHENTICATION command returns MN-HA Authenticator with: Data = 8E13D5D91948D237EE4AB1DF26605C47'. SW = '9000'.	
8	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '02' (MIP-RRQ Hash) P2 = '02' Data = '0102030405060708090A0B0C 1122334455667788'  (Data = #Preceding MIP-RRQ Data #MN-AAA Extension Header)	
9	eUICC → T	COMPUTE IP AUTHENTICATION command returns : SW = '9000'.	
10	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '03' (MN-AAA Authenticator) P2 = '00' Data = '00 11223344 55667788 99102030 40506070'  (Data = #NAI-Entry-Index #Challenge)	
11	eUICC → T	COMPUTE IP AUTHENTICATION command returns MN-AAA Authenticator Response with: Data = '5BD292B2EDAC3974E3B2F3CA539EA261' SW = '9000'.	

### 8.2.4.16. Installing USIM and ISIM with sharing NAA parameters

#### 8.2.4.16.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-9	6.14.1.9
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-2	6.14.5.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2	6.14.5.2.3
PE-AKAPParameters-12	6.14.9.13
PE-ISIM-by-Template-1	6.14.6.1.1
PE-OPT-ISIM-by-Template-1	6.14.6.2.1
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-ISIM	6.14.13.3
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-9-v3	6.14.1.36
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-2-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2-v2	6.14.5.2.7
PE-AKAPParameters-12	6.14.9.13
PE-ISIM-by-Template-2	6.14.6.1.2
PE-OPT-ISIM-by-Template-1-v2	6.14.6.2.2
PE-AKAPParameters-3	6.14.9.3
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-ISIM	6.14.13.3
PE-END-1	6.14.14.1

#### 8.2.4.16.2. Initial Conditions

None.

#### 8.2.4.16.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	

4	T → eUICC	Select the ISIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with SQN '0000000010 07': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C649377 B9B9 022FE3275BF01411'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.8 RQ8.1.4.12 RQ8.1.4.13
8	T → eUICC	Send AUTHENTICATE command with SQN '0000000210 27' (exceeds delta): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C669357 B9B9 94F171D3D1F4D089'.	
9	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BECB43C 2C80AE0582AE3FC7' SW = '9000'.	RQ8.1.4.12
10	T → eUICC	Send AUTHENTICATE command with SQN '0000000210 07' (within delta): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C669377 B9B9 137626880CBAA079'.	
11	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.12
12	T → eUICC	Send AUTHENTICATE command with SQN '0000000110 06' (exceeds age limit): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C659376 B9B9 B7B092F5DDBF4EE3'.	
13	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BEEB43C E685022180D8A2AB' SW = '9000'.	RQ8.1.4.12
14	T → eUICC	Send AUTHENTICATE command with SQN '0000000110 25' (within age limit): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C659355 B9B9 1B6EFE265B816C4A'.	
15	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.12

### 8.2.4.17. Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE in 2G mode

#### 8.2.4.17.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-21	6.14.1.21
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.4.17.2. Initial Conditions

None.

#### 8.2.4.17.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application.	
5	T → eUICC	Send VERIFY PIN pinAppl1.	
6	T → eUICC	Send AUTHENTICATE command in 2G mode with: P1 = '00' P2 = '80' Data = '10 23553CBE9637A89D218AE64DAE47BF35'.	
7	eUICC → T	AUTHENTICATE command fails with error SW '9864' – Authentication error, GSM security context not supported.	RQ8.1.4.6
8	T ↔ eUICC	Select ef-ust (File ID '6F38').	
9	T → eUICC	Send VERIFY PIN adm1.	

10	T → eUICC	Send UPDATE BINARY with Data '220A0408 22 000000000010000000' to enable service 38.	
11	T → eUICC	Send AUTHENTICATE command in 2G mode with: P1 = '00' P2 = '80' Data = '10 23553CBE9637A89D218AE64DAE47BF35'.	
12	eUICC → T	AUTHENTICATE command returns with: Data = '04 46F8416A 08 EAE4BE823AF9A08B' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.6 RQ8.1.4.14

#### 8.2.4.18. Installing USIM and ISIM with shared SQN array

##### 8.2.4.18.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-9	6.14.1.9
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-2	6.14.5.1.3
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2	6.14.5.2.3
PE-AKAParameters-12	6.14.9.13
PE-ISIM-by-Template-1	6.14.6.1.1
PE-OPT-ISIM-by-Template-1	6.14.6.2.1
PE-AKAParameters-14	6.14.9.15
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-ISIM	6.14.13.3
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-9-v3	6.14.1.36
PE-MF-by-Template-2	6.14.2.1.3
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-2-v2	6.14.5.1.12
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-2-v2	6.14.5.2.7
PE-AKAPParameters-12	6.14.9.13
PE-ISIM-by-Template-2	6.14.6.1.2
PE-OPT-ISIM-by-Template-1-v2	6.14.6.2.2
PE-AKAPParameters-14	6.14.9.15
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-ISIM	6.14.13.3
PE-END-1	6.14.14.1

#### 8.2.4.18.2. Initial Conditions

None.

#### 8.2.4.18.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the ISIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with SQN '0000000010 07': P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C649377 B9B9 022FE3275BF01411'.	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.1 RQ8.1.4.8b RQ8.1.4.12 RQ8.1.4.13

8	T → eUICC	Send AUTHENTICATE command with SQN '0000000210 27' (exceeds delta): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C669357 B9B9 94F171D3D1F4D089'.	
9	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BECB43C 2C80AE0582AE3FC7' SW = '9000'.	RQ8.1.4.8b
10	T → eUICC	Send AUTHENTICATE command with SQN '0000000210 07' (within delta): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C669377 B9B9 137626880CBAA079'.	
11	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.8b
12	T → eUICC	Send AUTHENTICATE command with SQN '0000000110 06' (exceeds age limit): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C659376 B9B9 B7B092F5DDBF4EE3'.	
13	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BEEB43C E685022180D8A2AB' SW = '9000'.	RQ8.1.4.8b
14	T → eUICC	Send AUTHENTICATE command with SQN '0000000110 25' (within age limit): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C659355 B9B9 1B6EFE265B816C4A'.	
15	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441' SW = '9000'.	RQ8.1.4.8b
16	T → eUICC	Select the USIM application	
17	T → eUICC	Send VERIFY PIN pinAppl1	



18	T → eUICC	Send AUTHENTICATE command with SQN '0000000010 07' (SQN is too old): P1 = '00' P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 AA689C649377 B9B9 022FE3275BF01411'.	
19	eUICC → T	AUTHENTICATE command returns with: Data = 'DC 0E 451E8BEEB43C E685022180D8A2AB' SW = '9000'.	RQ8.1.4.8b

#### 8.2.4.19. Installing multiple PE-AKAParameters with MILENAGE and TUAK and sending AUTHENTICATE

##### 8.2.4.19.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-23	6.14.1.23
PE-MF-by-Template-5	6.14.2.1.8
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAParameters-15	6.14.9.16
PE-USIM-by-Template-7	6.14.5.1.9
PE-PINCodes-Local-PIN-5	6.14.8.5
PE-OPT-USIM-by-Template-4	6.14.5.2.5
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-RFM-4	6.14.13.6
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-23-v3	6.14.1.50
PE-MF-by-Template-5	6.14.2.1.8
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-15	6.14.9.16
PE-USIM-by-Template-7-v2	6.14.5.1.17
PE-PINCodes-Local-PIN-5	6.14.8.5
PE-OPT-USIM-by-Template-4-v2	6.14.5.2.9
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-RFM-4	6.14.13.6
PE-END-1	6.14.14.1

**8.2.4.19.2. Initial Conditions**

None.

**8.2.4.19.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.3.9 RQ8.1.4.1 RQ8.1.4.2 RQ8.1.4.3 RQ8.1.4.3b RQ8.1.4.4 RQ8.1.4.5 RQ8.1.4.9 RQ8.1.4.14
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T → eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application (AID: A0 00 00 00 87 10 02 FF 33 FF 01 89 00 00 01 00).	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send AUTHENTICATE command with: P1 = '00'. P2 = '81' Data = '10 424242424242424242424242424242 10 608E0F8A8145 FFFF F9A54E6AEAA8618D'. See Note1	
7	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 04 657ACD64 10 D71A1E5C6CAFFE986A26F783E5C78BE1 10 BE849FA2564F869AECEE6F62D4337E72'. SW = '9000' See Note1	

8	T → eUICC	Select the USIM application (AID: A0 00 00 00 87 10 02 00 00 02 00 00 00 02 00).	
9	T → eUICC	Send VERIFY PIN pinAppl1	
10	T → eUICC	Send AUTHENTICATE command with: P1 = '00'. P2 = '81' Data = '10 23553CBE9637A89D218AE64DAE47BF35 10 55F328B43577 B9B9 4A9FFAC354DFAFB3'. See Note2	
11	eUICC → T	AUTHENTICATE command returns with: Data = 'DB 08 A54211D5E3BA50BF 10 B40BA9A3C58B2A05BBF0D987B21BF8CB 10 F769BCD751044604127672711C6D3441'. SW = '9000' See Note2	

Note1: the input and output of AUTHENTICATE command is derived from [TUAK TEST]

Note2: the input and output of AUTHENTICATE command is derived from [MILENAGE TEST]

#### 8.2.4.20. Installing PE-CDMAParameters with shortest Mobile IP authentication parameters

##### 8.2.4.20.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-8	6.14.1.8
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2	6.14.7.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2	6.14.7.2.2
PE-CDMAParameters-2	6.14.9.17
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-8-v3	6.14.1.35
PE-MF-by-Template-3	6.14.2.1.4
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CSIM-by-Template-2-v2	6.14.7.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-CSIM-by-Template-2-v2	6.14.7.2.4
PE-CDMAParameters-2	6.14.9.17
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-CSIM	6.14.13.4
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### 8.2.4.20.2. Initial Conditions

None.

### 8.2.4.20.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.4.15 RQ8.1.4.17 RQ8.1.4.20 RQ8.1.4.20a RQ8.1.4.20b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the CSIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '01 (MN-HA Authenticator) P2 = '02' Data = '00 0102030405060708090A0B0C'  (Data #NAI-Entry-Index #Registration-Data)	
7	eUICC → T	COMPUTE IP AUTHENTICATION command returns MN-HA Authenticator with: Data = '9838E6186508A3B5BD7B45E8B7CD947D'. SW = '9000'.	
8	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '02' (MIP-RRQ Hash) P2 = '02' Data = '0102030405060708090A0B0C 1122334455667788'  (Data = #Preceding MIP-RRQ Data #MN-AAA Extension Header)	
9	eUICC → T	COMPUTE IP AUTHENTICATION command returns : SW = '9000'.	
10	T → eUICC	Send COMPUTE IP AUTHENTICATION command with: P1 = '03' (MN-AAA Authenticator) P2 = '00' Data = '00 11223344 55667788 99102030 40506070'  (Data = #NAI-Entry-Index #Challenge)	
11	eUICC → T	COMPUTE IP AUTHENTICATION command returns MN-AAA Authenticator Response with: Data = '797F39F48AC1D0ADE5327FCB63CFF5CD' SW = '9000'.	

## 8.2.5 Check PIN and PUK codes

### 8.2.5.1. Installing PINs in enabled state

#### 8.2.5.1.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.5.1.2. *Initial conditions*

None.

#### 8.2.5.1.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.7 RQ8.1.5.14 RQ8.1.5.16 RQ8.1.5.18
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send the following commands to RFM USIM using SCP80: SELECT FILE with Data = '3F00' and SELECT FILE with Data = '7FFF'.	

5	eUICC → T	The second SELECT FILE command response contains an FCP with the PS_DO. The value of the PS_DO (tag '90') shall indicate that adm1, PINAppl1 and secondPINAppl1 are enabled. There shall be three key references: '830101' and '830181' and '83010A'.	RQ8.1.5.9
---	-----------	--	-----------

### 8.2.5.2. Installing PINs in disabled state

#### 8.2.5.2.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-2	6.14.4.2
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-3	6.14.8.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-2	6.14.4.2
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-3	6.14.8.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.5.2.2. *Initial conditions*

None.

#### 8.2.5.2.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.7 RQ8.1.5.14 RQ8.1.5.16 RQ8.1.5.18

2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send the following commands to RFM USIM using SCP80: SELECT FILE with Data = '3F00' and SELECT FILE with Data = '7FFF'.	
5	eUICC → T	The second SELECT FILE command response contains an FCP with the PS_DO. The value of the PS_DO (tag '90') shall indicate that adm1 is enabled, PINApp1 is disabled and secondPINApp1 is disabled. There shall be three key references: '830101' and '830181' and '83010A'	RQ8.1.5.9

### 8.2.5.3. Installing different PINs with different PUKs

#### 8.2.5.3.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-3	6.14.4.3
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-4	6.14.8.4
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-3	6.14.4.3
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-4	6.14.8.4
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### 8.2.5.3.2. Initial conditions

None.

### 8.2.5.3.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.24
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
5	eUICC → T	VERIFY PIN command returns SW '63 C2'	
6	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
7	eUICC → T	VERIFY PIN command returns SW '63 C1'	
8	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
9	eUICC → T	VERIFY PIN command returns SW '63 C0'	
10	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
11	eUICC → T	VERIFY PIN command returns SW '69 83'	
12	T → eUICC	Send UNBLOCK PIN command for pinAppl1 with Data = '31323334353637383131313131313131'	
13	eUICC → T	UNBLOCK PIN command returns SW '90 00'	RQ8.1.5.16 RQ8.1.5.16b
14	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
15	eUICC → T	VERIFY PIN command returns SW '90 00'	RQ8.1.5.16 RQ8.1.5.16b
16	T → eUICC	Select the USIM application	
17	T → eUICC	Send VERIFY PIN command for secondPINAppl1 with Data = '3131313131313131'	
18	eUICC → T	VERIFY PIN command returns SW '63 C1'	
19	T → eUICC	Send VERIFY PIN command for secondPINAppl1 with Data = '3131313131313131'	
20	eUICC → T	VERIFY PIN command returns SW '63 C0'	
21	T → eUICC	Send VERIFY PIN command for secondPINAppl1 with Data = '3131313131313131'	
22	eUICC → T	VERIFY PIN command returns SW '69 83'	
23	T → eUICC	Send UNBLOCK PIN command for secondPINAppl1 with Data = '31323334353637383131313131313131'	
24	eUICC → T	UNBLOCK PIN command returns SW '90 00'	RQ8.1.5.16 RQ8.1.5.16b
25	T → eUICC	Send VERIFY PIN command for secondPINAppl1 with Data = '3131313131313131'	
26	eUICC → T	VERIFY PIN command returns SW '90 00'	RQ8.1.5.16 RQ8.1.5.16b

### 8.2.5.4. Checking the access domain validity of an RFM instance in case of a blocked PIN

#### 8.2.5.4.1. Test execution

Profile Package v2:



Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.11
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-2	6.14.13.12
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.11
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-2	6.14.13.12
PE-END-1	6.14.14.1

#### 8.2.5.4.2. Initial conditions

None.

#### 8.2.5.4.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
5	eUICC → T	VERIFY PIN command returns SW '63 C2'	
6	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
7	eUICC → T	VERIFY PIN command returns SW '63 C1'	
8	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
9	eUICC → T	VERIFY PIN command returns SW '63 C0'	
10	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
11	eUICC → T	VERIFY PIN command returns SW '69 83'	
12	T → eUICC	Send SELECT by FILE ID command with Data = '7FA0' (Custom DF); SELECT by FILE ID command with Data	

		= '6F01' (EF1) and UPDATE BINARY with Data '998877665544' to the RFM instance using SCP80	
13	eUICC → T	The two SELECT by FILE ID and UPDATE BINARY commands succeed (SW '90 00')	RQ8.1.5.8
14	T → eUICC	Send SELECT by FILE ID command with Data = '7FA0' (Custom DF); SELECT by FILE ID command with Data = '6F01' (EF1) and READ BINARY with Length = 06 to the RFM instance using SCP80	
15	eUICC → T	The two SELECT by FILE ID and READ BINARY commands succeed (SW '90 00') with response data containing the content of EF1 '998877665544'	RQ8.1.5.8

#### 8.2.5.5. Checking the PIN context of a Global PIN

##### 8.2.5.5.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

*8.2.5.5.2. Initial conditions*

None.

*8.2.5.5.3. Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef launchpad from the df cd	
5	T → eUICC	Send READ BINARY with Length = '05'	
6	eUICC → T	READ BINARY returns SW '69 82'	RQ8.1.5.1 RQ8.1.3.20a
7	T → eUICC	Send VERIFY PIN for PINAppl1 with Data '3132333435363738'	
8	eUICC → T	VERIFY PIN returns SW '90 00'	
9	T → eUICC	Send READ BINARY with Length = '05'	
10	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef launchpad '1122334455'	RQ8.1.5.1
11	T ↔ eUICC	Select ef m1pl from the df mmss in df telecom	
12	T → eUICC	Send READ BINARY with Length = '18'	
13	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef m1pl '000102030405060708090A0B0C0D0E0F1011121314151617'	RQ8.1.5.1
14	T ↔ eUICC	Select ef imsi from the adf usim	
15	T → eUICC	Send READ BINARY with Length = '09'	
16	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef imsi '082943019134876765'	RQ8.1.5.1

### 8.2.5.6. Checking the PIN context of a Local PIN

#### 8.2.5.6.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-2	6.14.2.1.6
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
ADF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.4
PE-PINCodes-Local-PIN-5	6.14.8.5
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.11
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-2	6.14.2.1.6
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
ADF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.4
PE-PINCodes-Local-PIN-5	6.14.8.5
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.11
PE-END-1	6.14.14.1

#### 8.2.5.6.2. *Initial conditions*

None.

### 8.2.5.6.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.21
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef1 (File ID '6F01') from the Custom ADF (File ID '7FA1')	
5	T → eUICC	Send UPDATE BINARY with Data '99887766554433221100'	
6	eUICC → T	UPDATE BINARY returns SW '69 82'	RQ8.1.5.2 RQ8.1.5.2b RQ8.1.3.20a
7	T → eUICC	Send VERIFY PIN for secondPINApp1 with Data '31323334FFFFFFFF'	
8	eUICC → T	VERIFY PIN returns SW '90 00'	
9	T → eUICC	Send UPDATE BINARY with Data '99887766554433221100'	
10	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2b
11	T → eUICC	Send READ BINARY with Length = 0A	
12	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of EF1 '99887766554433221100'	RQ8.1.5.2 RQ8.1.5.2b

### 8.2.5.7. Checking the “PIN state change allowed” and “PIN state change not allowed” status

#### 8.2.5.7.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.5.7.1. Initial conditions

None.

#### 8.2.5.7.2. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send the following commands to RFM instance using SCP80: SELECT FILE with Data = '3F00' and SELECT FILE with Data = '7FFF'.	
5	eUICC → T	The second SELECT FILE command response contains an FCP with the PS_DO. The value of the PS_DO (tag '90') shall indicate that adm1 is enabled, PINAppl1 is enabled and secondPINAppl1 is enabled. There shall be three key references: '830101' and '830181' and '83010A'	
6	T → eUICC	Send DISABLE PIN command for pinAppl1 with Data = '3132333435363738'	
7	eUICC → T	DISABLE PIN command returns SW '90 00'	RQ8.1.5.10 RQ8.1.5.19
8	T → eUICC	Send the following commands to RFM instance using SCP80: SELECT FILE with Data = '3F00' and SELECT FILE with Data = '7FFF'.	

9	eUICC → T	The second SELECT FILE command response contains an FCP with the PS_DO. The value of the PS_DO (tag '90') shall indicate that adm1 is enabled, PINAppl1 is disabled and secondPINAppl1 is enabled. There shall be three key references: '830101' and '830181' and '83010A'	RQ8.1.5.10 RQ8.1.5.19
10	T → eUICC	Send DISABLE PIN command for secondPINAppl1 with Data = '3131313131313131'	
11	eUICC → T	DISABLE PIN command fails with SW error	RQ8.1.5.10 RQ8.1.5.19
12	T → eUICC	Send the following commands to RFM instance using SCP80: SELECT FILE with Data = '3F00' and SELECT FILE with Data = '7FFF'.	
13	eUICC → T	The second SELECT FILE command response contains an FCP with the PS_DO. The value of the PS_DO (tag '90') shall indicate that adm1 is enabled, PINAppl1 is disabled and secondPINAppl1 is enabled. There shall be three key references: '830101' and '830181' and '83010A'	RQ8.1.5.10 RQ8.1.5.19

#### 8.2.5.8. Checking the “PIN can be changed” and “PIN cannot be changed” status

##### 8.2.5.8.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

*8.2.5.8.2. Initial conditions*

None.

*8.2.5.8.3. Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send CHANGE PIN command for pinAppl1 with Data = '313233343536373831313131313131'	
6	eUICC → T	CHANGE PIN command returns SW '90 00'	RQ8.1.5.10 RQ8.1.5.20
7	T → eUICC	Send VERIFY PIN command for pinAppl1 with Data = '3131313131313131'	
8	eUICC → T	VERIFY PIN command returns SW '90 00'	RQ8.1.5.10 RQ8.1.5.20
9	T → eUICC	Send CHANGE PIN command for secondPINAppl1 with Data = '3131313131313131313132333435363738'	
10	eUICC → T	CHANGE PIN command fails with SW error	RQ8.1.5.10 RQ8.1.5.20
11	T → eUICC	Send VERIFY PIN command for secondPINAppl1 with Data = '3132333435363738'	
12	eUICC → T	VERIFY PIN command returns SW '63 C1'	RQ8.1.5.10 RQ8.1.5.20



### 8.2.5.9. Error when no consistency between pinStatusTemplateDO and PE PINCodes Local

#### 8.2.5.9.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-2	6.14.8.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.9.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-2	6.14.8.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.9.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.5.9.2. Initial conditions

None

#### 8.2.5.9.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION IS 2.2:  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>○ pin-code-missing (11), OR</li> <li>○ different from (0)</li> </ul> </li> <li>• identification <ul style="list-style-type: none"> <li>○ USIM-by-Generic-File-Management-1, OR</li> <li>○ PE-PINCodes-Local-PIN-2</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1:</p>	RQ8.1.5.2d RQ8.1.11.26 RQ8.1.11.27 RQ8.1.11.30

		<p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>○ pin-code-missing (11), OR</li> <li>○ in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>• identification <ul style="list-style-type: none"> <li>○ USIM-by-Generic-File-Management-1</li> <li>○ PE-PINCodes-Local-PIN-2</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2 OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>○ pin-code-missing (11), OR</li> <li>○ in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>• identification <ul style="list-style-type: none"> <li>○ USIM-by-Generic-File-Management-1, OR</li> <li>○ PE-PINCodes-Local-PIN-2</li> </ul> </li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	
3	T ↔ eUICC	Enable Profile Package according to 6.11.fail	

#### 8.2.5.10. Checking Local PIN handling

##### 8.2.5.10.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-21	6.14.1.21
MF-by-Generic-File-Management-2	6.14.2.1.6
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
ADF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.4
PE-PINCodes-Local-PIN-6	6.14.8.6
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.11
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
MF-by-Generic-File-Management-2	6.14.2.1.6
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
ADF-CUSTOM-by-Generic-File-Management-1	6.14.2.4.4
PE-PINCodes-Local-PIN-6	6.14.8.6
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.11
PE-END-1	6.14.14.1

#### 8.2.5.10.2. Initial conditions

None

#### 8.2.5.10.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.17
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef1 (File ID '6F01') from the Custom ADF (File ID '7FA1')	
5	T → eUICC	Send VERIFY PIN for secondPINApp1 with Data '31323334FFFFFFFF'	
6	eUICC → T	VERIFY PIN returns SW '90 00'	
7	T ↔ eUICC	Select ef est (File ID '6F56') from ADF USIM	
8	T → eUICC	Send UPDATE BINARY with Data '01'	
9	eUICC → T	UPDATE BINARY returns SW '69 82'	RQ8.1.5.2 RQ8.1.5.2b
10	T → eUICC	Send VERIFY PIN for secondPINApp1 with Data '1111111111111111 '	
11	eUICC → T	VERIFY PIN returns SW '63 C1'	
12	T → eUICC	Send VERIFY PIN for secondPINApp1 with Data '1111111111111111 '	
13	eUICC → T	VERIFY PIN returns SW '63 C0'	
14	T → eUICC	Send VERIFY PIN for secondPINApp1 with Data '1111111111111111 '	
15	eUICC → T	VERIFY PIN returns SW '69 83'	
16	T ↔ eUICC	Select ef1 (File ID '6F01') from the Custom ADF (File ID '7FA1')	
17	T → eUICC	Send VERIFY PIN for secondPINApp1 with Data '31323334FFFFFFFF'	
18	eUICC → T	VERIFY PIN returns SW '90 00'	RQ8.1.5.13
19	T → eUICC	Send UPDATE BINARY with Data '99887766554433221100'	

20	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2b RQ8.1.5.13
----	-----------	----------------------------------	---------------------------------------

### 8.2.5.11. Checking the PIN context of a Local PIN

#### 8.2.5.11.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-4	6.14.2.3.4
PE-PINCodes-Local-PIN-5	6.14.8.5
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-4-v2	6.14.2.3.8
PE-PINCodes-Local-PIN-5	6.14.8.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.5.11.2. Initial conditions

None.

#### 8.2.5.11.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.10

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef-sume (File ID '6F54') from the DF TELECOM	
5	T → eUICC	Send UPDATE BINARY with Data '8500FFFFFFFFFFFFFFFFFFFFFFFF'	
6	eUICC → T	UPDATE BINARY returns SW '69 82'	RQ8.1.5.2 RQ8.1.5.2b
7	T → eUICC	Send VERIFY PIN for secondPINAppl1 with Data '31323334FFFFFFFF'	
8	eUICC → T	VERIFY PIN returns SW '90 00'	
9	T → eUICC	Send UPDATE BINARY with Data '8500FFFFFFFFFFFFFFFFFFFFFFFF'	
10	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2b
11	T ↔ eUICC	Select ef-icon (File ID '4F80') from the DF GRAPHICS in DF TELECOM	
12	T → eUICC	Send UPDATE BINARY with Data '001122334455667788991011121314151617181920'	
13	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2b
14	T ↔ eUICC	Select ef-puid (File ID '4F24') from the DF PHONEBOOK in DF TELECOM	
15	T → eUICC	Send UPDATE BINARY with Data '0002'	
16	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2b
17	T ↔ eUICC	Select ef-mspl (File ID '4F21') from the DF MMSS in DF TELECOM	
18	T → eUICC	Send UPDATE BINARY with Data '00112233445566778899101112131415161718192021222324'	
19	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2b

### 8.2.5.12. Checking the update of Global PIN and ADM for IoT Minimal Profile

#### 8.2.5.12.1. *Test execution*

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-PUKCodes-2	6.14.3.2
PE-PINCodes-4	6.14.4.4
PE-IoT-by-Template-1	6.14.17.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-END-1	6.14.14.1

#### 8.2.5.12.2. *Initial Conditions*

None.

### 8.2.5.12.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.1b RQ8.1.5.25
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef imsi from the adf usim	
5	T → eUICC	Send READ BINARY with Length = '09'	
6	eUICC → T	READ BINARY returns SW '69 82'	RQ8.1.5.1 RQ8.1.3.20a
7	T → eUICC	Send VERIFY PIN for PINAppl1 with Data '31313131FFFFFFFF'	
8	eUICC → T	VERIFY PIN returns SW '63 C2'	
9	T → eUICC	Send VERIFY PIN for PINAppl1 with Data '3132333435363738'	
10	eUICC → T	VERIFY PIN returns SW '90 00'	
11	T → eUICC	Send READ BINARY with Length = '09'	
12	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef imsi '082943019134876765'	RQ8.1.5.1 RQ8.1.3.20a
13	T → eUICC	Send UPDATE BINARY with Data '080910101032540636'	
14	eUICC → T	UPDATE BINARY returns SW '69 82'	RQ8.1.3.20a
15	T → eUICC	Send VERIFY PIN for ADM1 with Data '3132333435363738'	
16	eUICC → T	VERIFY PIN returns SW '90 00'	
17	T → eUICC	Send UPDATE BINARY with Data '080910101032540636'	
18	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.3.20a
19	T → eUICC	Send READ BINARY with Length = 09	
20	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef imsi '080910101032540636'	RQ8.1.3.20a

### 8.2.5.13. Checking the update of Local PIN for IoT Minimal Profile

#### 8.2.5.13.1. Test execution

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-PUKCodes-2	6.14.3.2
PE-PINCodes-4	6.14.4.4
PE-IoT-by-Template-1	6.14.17.1
PE-PINCodes-Local-PIN-7	6.14.8.7
PE-OPT-IoT-by-Template-1	6.14.18.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-END-1	6.14.14.1

### 8.2.5.13.2. Initial Conditions

None.

### 8.2.5.13.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.1b RQ8.1.5.2e RQ8.1.5.25
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef est from the adf usim	
5	T → eUICC	Send READ BINARY with Length = '01'	
6	eUICC → T	READ BINARY returns SW '69 82'	RQ8.1.5.1 RQ8.1.3.20a
7	T → eUICC	Send VERIFY PIN for PINAppl1 with Data '3132333435363738'	
8	eUICC → T	VERIFY PIN returns SW '90 00'	
9	T → eUICC	Send READ BINARY with Length = '01'	
10	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef est '00'	RQ8.1.5.1 RQ8.1.3.20a
11	T → eUICC	Send UPDATE BINARY with Data '01'	
12	eUICC → T	UPDATE BINARY returns SW '69 82'	RQ8.1.5.2 RQ8.1.5.2f RQ8.1.3.20a
13	T → eUICC	Send VERIFY PIN for secondPINAppl1 with Data '31313131FFFFFFF'	
14	eUICC → T	VERIFY PIN returns SW '63 C1'	
15	T → eUICC	Send VERIFY PIN for secondPINAppl1 with Data '3132333435363738'	
16	eUICC → T	VERIFY PIN returns SW '90 00'	
17	T → eUICC	Send UPDATE BINARY with Data '01'	
18	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2f RQ8.1.3.20a
19	T → eUICC	Send READ BINARY with Length = 01	
20	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef est '01'	RQ8.1.3.20a

### 8.2.5.14. Checking the default Global PIN1 for IoT Minimal Profile

#### 8.2.5.14.1. Test execution

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-1	6.14.17.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-END-1	6.14.14.1

### 8.2.5.14.2. Initial Conditions

None.

### 8.2.5.14.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.1b
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef imsi from the adf usim	
5	T → eUICC	Send READ BINARY with Length = '09'	
6	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef imsi '082943019134876765'	RQ8.1.5.1 RQ8.1.5.22
7	T → eUICC	Send ENABLE PIN for PINAppl1 with Data '31313131FFFFFFFF'	
8	eUICC → T	ENABLE PIN returns SW '90 00'	RQ8.1.5.22
9	T ↔ eUICC	Initialise eUICC according to 6.9	
10	T ↔ eUICC	Select ef imsi from the adf usim	
11	T → eUICC	Send READ BINARY with Length = '09'	
12	eUICC → T	READ BINARY returns SW '69 82'	RQ8.1.5.1 RQ8.1.3.20a
13	T → eUICC	Send VERIFY PIN for PINAppl1 with Data '3132333435363738'	
14	eUICC → T	VERIFY PIN returns SW '63 C2'	RQ8.1.5.22
15	T → eUICC	Send VERIFY PIN for PINAppl1 with Data '31313131FFFFFFFF'	
16	eUICC → T	VERIFY PIN returns SW '90 00'	RQ8.1.5.22
17	T → eUICC	Send READ BINARY with Length = '09'	
18	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef imsi '082943019134876765'	RQ8.1.5.1 RQ8.1.3.20a

### 8.2.5.15. Checking the default Local PIN for IoT Minimal Profile

#### 8.2.5.15.1. Test execution

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-1	6.14.17.1
PE-OPT-IoT-by-Template-3	6.14.18.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-END-1	6.14.14.1

### 8.2.5.15.2. Initial Conditions

None.

### 8.2.5.15.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.5.1b RQ8.1.5.2e



2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select ef est from the adf usim	
5	T → eUICC	Send UPDATE BINARY with Data '01'	
6	eUICC → T	UPDATE BINARY returns SW '69 82'	RQ8.1.5.2 RQ8.1.5.2f RQ8.1.5.26 RQ8.1.3.20a
7	T → eUICC	Send VERIFY PIN for secondPINAppl1 with Data '3132333435363738'	
8	eUICC → T	VERIFY PIN returns SW '63 C2'	RQ8.1.5.26
9	T → eUICC	Send VERIFY PIN for secondPINAppl1 with Data '31313131FFFFFFFF'	
10	eUICC → T	VERIFY PIN returns SW '90 00'	RQ8.1.5.26
11	T → eUICC	Send UPDATE BINARY with Data '01'	
12	eUICC → T	UPDATE BINARY returns SW '90 00'	RQ8.1.5.2 RQ8.1.5.2f RQ8.1.5.26 RQ8.1.3.20a
13	T → eUICC	Send READ BINARY with Length = 01	
14	eUICC → T	READ BINARY succeeds (SW '90 00') with response data containing the content of ef est '01'	RQ8.1.3.20a

## 8.2.6 Check Security Domains

### 8.2.6.1. Check mandatory elements in PE Security Domain

This test shall check all the mandatory objects.

#### 8.2.6.1.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.1.2. Initial conditions

None.

#### 8.2.6.1.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '80' P2 = '02'	

		Data = '4F 00'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of MNO-SD (#instanceAID)</li> <li>• Life cycle state (#lifeCycleState) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	RQ8.1.7.34b RQ8.1.7.34c

Note: a 2<sup>nd</sup> byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

#### 8.2.6.2. Check key list in PE Security Domain

This test shall check if the optional key list object is correctly processed.

##### 8.2.6.2.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.6.2.2. Initial conditions

None

### 8.2.6.2.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.10 RQ8.1.6.26 RQ8.1.6.34 RQ8.1.6.35 RQ8.1.6.37 RQ8.1.6.38a
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = 'E0'.	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>key information data containing #keyIdentifier, #keyVersionNumber and #keyType.</li> <li>SW='9000'.</li> </ul>	
6	T → eUICC	Send GET_STATUS command using SCP80 to MNO-SD with P1 = '80' P2= '02' Data = '4F 00'.	
7	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>AID of MNO-SD (#instanceAID)</li> <li>Life cycle state (#lifeCycleState) See Note</li> <li>Privileges (#applicationPrivileges)</li> <li>SCP Registry Data is present</li> <li>SW='9000'.</li> </ul>	RQ8.1.6.8 RQ8.1.7.34b RQ8.1.7.34c

Note: a 2<sup>nd</sup> byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

### 8.2.6.3. Check number of keyComponent objects

This test shall check if keyComponent is assigned just once per key.

#### 8.2.6.3.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-3	6.14.10.3
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-3	6.14.10.3
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.3.2. Initial conditions

None

#### 8.2.6.3.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according. To 6.10.	RQ8.1.6.27
2	eUICC → T	<p>If TCA_VERSION is 2.2 or BELOW:  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status different from (0)</li> <li>identification of PE-SecurityDomain-MNO-SD-3</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1:</p>	<p>RQ8.1.11.2  RQ8.1.11.2a  RQ8.1.11.25  RQ8.1.11.30</p>

		<p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> <li>identification of PE-SecurityDomain-MNO-SD-3</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2 OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> <li>identification of PE-SecurityDomain-MNO-SD-3</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

#### 8.2.6.4. Check sdPersoData

This test shall check if sdPersoData is processed.

##### 8.2.6.4.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-4	6.14.10.4
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-4	6.14.10.4
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.6.4.2. Initial conditions

None

### 8.2.6.4.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.29 RQ8.1.6.30 RQ8.1.6.31 RQ8.1.6.46
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '42' (Issuer Identification Number).	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>IIN out of #sdPersoData.</li> <li>SW='9000'.</li> </ul>	
6	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '45' (Card Image Number).	
7	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>CIN out of #sdPersoData.</li> <li>SW='9000'.</li> </ul>	

### 8.2.6.5. Check OTA HTTPs Personalisation

This test shall check if MNO\_SD is personalised with OTA HTTPs Data.

#### 8.2.6.5.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-5	6.14.10.5
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-5	6.14.10.5
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

*8.2.6.5.2. Initial conditions*

None

*8.2.6.5.3. Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '85'.	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Security Domain Administration Session Parameters contained in #sdPersoData.</li> <li>SW='9000'.</li> </ul>	RQ8.1.6.36a

*8.2.6.6.*      VOID*8.2.6.7.*      VOID



### 8.2.6.8. Check installing an SSD under a self extradited SSD

#### 8.2.6.8.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-3	6.14.11.4
PE-SecurityDomain-SSD-4	6.14.11.5
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-3	6.14.11.4
PE-SecurityDomain-SSD-4	6.14.11.5
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.8.2. *Initial conditions*

None.

### 8.2.6.8.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.41
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET STATUS command to SSD-3 using SCP80 with P1 = '40' P2 = '02' Data = '4F 10 A00000055910100102736456616C7566'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of SSD-4 (#instanceAID)</li> <li>• Life cycle state (#lifeCycleState) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	

Note: a 2<sup>nd</sup> byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

### 8.2.6.9. Check initial counter is default when keyCounterValue absent

#### 8.2.6.9.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.9.2. Initial conditions

None.

#### 8.2.6.9.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.8 RQ8.1.6.10 RQ8.1.6.26 RQ8.1.6.34 RQ8.1.6.35 RQ8.1.6.37 RQ8.1.6.38a
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = 00 P2 = 66 SPI = 1A 21 KIC = 00 KID = 12 Counter = 00 00 00 00 02.	
5	eUICC → T	Status Code of SCP80 protocol = 03 (CNTR high) , OR No Response Packet	RQ8.1.6.20b
6	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = 00 P2 = 66 SPI = 1A 21 KIC = 00 KID = 12 Counter = 00 00 00 00 01.	
7	eUICC → T	Status Code of SCP80 protocol = 00 (PoR OK)	RQ8.1.6.20b

### 8.2.6.10. Error when installing KeyObject parameter not supported

#### 8.2.6.10.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-7	6.14.10.7
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-7	6.14.10.7
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.10.2. Initial conditions

None.

#### 8.2.6.10.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.26b RQ8.1.6.48

2	eUICC → T	<p>If TCA_VERSION is 3.1, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status feature-not-supported (10)</li> <li>identification of PE-SecurityDomain-MNO-SD-7</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status feature-not-supported (10)</li> <li>identification of PE-SecurityDomain-MNO-SD-7</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.6.45 RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.9 RQ8.1.11.10 RQ8.1.11.30</p>
3	T ↔ eUICC	Enable Profile Package according to 6.11 shall fail	

### 8.2.6.11. Check SCP parameters when both SCP80 and SCP02 is supported in SSD

#### 8.2.6.11.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-21	6.14.1.21
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-4	6.14.10.4
PE-SecurityDomain-SSD-5	6.14.11.7
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-4	6.14.10.4
PE-SecurityDomain-SSD-5	6.14.11.7
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.11.2. Initial conditions

None.

## 8.2.6.11.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.28 RQ8.1.6.31 RQ8.1.7.34b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD with P1 = '00' P2 = '66'	
5	eUICC → T	GET DATA command responds with Card Recognition Data containing: <ul style="list-style-type: none"> <li>Secure Channel Protocol &amp; Options supported by the ISD indicating support of <ul style="list-style-type: none"> <li>SCP80 with the protocol options '00'</li> </ul> </li> </ul> See Note1	
6	T → eUICC	Send GET DATA command to SSD with P1 = '00' P2 = '66'	
7	eUICC → T	GET DATA command responds with Security Domain Recognition Data containing <ul style="list-style-type: none"> <li>Secure Channel Protocol &amp; Options supported by the ISD indicating support of <ul style="list-style-type: none"> <li>SCP80 with the protocol options '00'</li> <li>SCP02 with the protocol options '55'</li> </ul> </li> </ul> See Note1 and Note2	

Note1: The order of the supported SCPs, or the presence of additional supported SCPs shall not be checked.

Note2: according to GlobalPlatform Card Specification there are two encoding options exist for tag '64'. The implementation may use one, or the other one of these formats.

### 8.2.6.12. Check SCP parameters when SCP80 is supported in SSD

#### 8.2.6.12.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-21	6.14.1.21
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-4	6.14.10.4
PE-SecurityDomain-SSD-6	6.14.11.8
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-4	6.14.10.4
PE-SecurityDomain-SSD-6	6.14.11.8
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.12.2. *Initial conditions*

None.

#### 8.2.6.12.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.28 RQ8.1.6.31 RQ8.1.7.34b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD with	

		P1 = '00' P2 = '66'	
5	eUICC → T	GET DATA command responds with Card Recognition Data containing: <ul style="list-style-type: none"> <li>Secure Channel Protocol &amp; Options supported by the ISD indicating support of <ul style="list-style-type: none"> <li>SCP80 with the protocol options '00'</li> </ul> </li> </ul> See Note	
6	T → eUICC	Send GET DATA command to SSD with P1 = '00' P2 = '66'	
7	eUICC → T	GET DATA command responds with Security Domain Recognition Data containing: <ul style="list-style-type: none"> <li>Secure Channel Protocol &amp; Options supported by the ISD indicating support of <ul style="list-style-type: none"> <li>SCP80 with the protocol options '00'</li> </ul> </li> </ul> (See Note)	

Note: The order of the supported SCPs or the presence of additional supported SCPs shall not be checked.

#### 8.2.6.13. Check LCS when no value is provided in lifeCycleState parameter

##### 8.2.6.13.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-2	6.14.11.2
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1



### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-2	6.14.11.2
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.6.13.2. Initial conditions

None.

8.2.6.13.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 10 #instanceAID of SSD'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of SSD (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> </ul> SW='9000'.	RQ8.1.7.34a RQ8.1.7.34c

Note: a 2<sup>nd</sup> byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

#### 8.2.6.14. Check OTA DNS Personalisation

This test checks if MNO\_SD is personalised with OTA DNS Parameters.

##### 8.2.6.14.1. Test execution

Profile Package v3:

Test PE name	Reference
Profile-Header-30-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-8	6.14.10.5
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.6.14.2. Initial conditions

None

##### 8.2.6.14.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '85'.	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Security Domain Administration Session Parameters contained in #sdPersoData.</li> </ul> SW='9000'.	RQ8.1.6.36a
6	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = 'F4' (DNS Parameters).	
7	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>DNS Parameters contained in #sdPersoData.</li> <li>SW='9000'.</li> </ul>	RQ8.1.6.36b

**8.2.6.15.** Check SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key

This test checks the mandatory presence of Access Domain DAP and Toolkit Parameter DAP inside the INSTALL [for install] command for SSD-1 when MNO-SD is personalized with Key Identifier '02' and Key Version Number '11'.

**8.2.6.15.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-21	6.14.1.21
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-10	6.14.10.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-10	6.14.10.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.6.15.2.** *Initial conditions*

None

**8.2.6.15.3.** *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.10 RQ8.1.6.26 RQ8.1.6.34 RQ8.1.6.35 RQ8.1.6.37 RQ8.1.6.38a
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send SSD-1 INSTALL [for install and make selectable] command to MNO-SD using SCP80 with P1 = '0C' P2 = '00' Data = '07A000000151535008A00000015153504110A00000 055910100102736456616C75650380800034C907810 280008201F0EA29800F01000101000002020112036C 756500C308ED2C7AABF9991364810C00010008A69 DB5FD76B2A0AA00' Le = '00'	
5	eUICC → T	INSTALL [for install and make selectable] command responds with <ul style="list-style-type: none"> <li>Length of Install Confirmation = '00'.</li> </ul> SW='9000'.	RQ8.1.6.61
6	T → eUICC	Send GET STATUS command to SSD-1 using SCP80 with P1 = '40' P2 = '02' Data = '4F 10 A00000055910100102736456616C7565'	
7	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>AID of SSD-1 ('A00000055910100102736456616C7565'H)</li> <li>Life cycle state ('07'H)See Note</li> <li>Privileges ('808000'H)</li> <li>SCP Registry Data is present</li> </ul> SW='9000'.	

Note: a 2<sup>nd</sup> byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

#### 8.2.6.16. Check failure of SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key

This test shall check the mandatory presence of Access Domain DAP and the Toolkit Parameter DAP inside the INSTALL [for install] command for SSD-1 when MNO-SD is personalized with Key Identifier '02' and Key Version Number '11'. The INSTALL [for install] command shall fail if the Access Domain DAP value, or the Toolkit Parameter DAP value is wrong.

##### 8.2.6.16.1. *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-21	6.14.1.28
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-10	6.14.10.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-21-v3	6.14.1.28
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-10	6.14.10.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.6.16.2. Initial conditions

None

8.2.6.16.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.10 RQ8.1.6.26 RQ8.1.6.34 RQ8.1.6.35 RQ8.1.6.37 RQ8.1.6.38a
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send SSD-1 INSTALL [for install and make selectable] command to MNO-SD using SCP80 with P1 = '0C' P2 = '00' Data = '07A000000151535008A00000015153504110A00000	

		055910100102736456616C75650380800034C907810 280008201F0EA29800F01000101000002020112036C 756500C308ED2C7AABF9991364810C00010008B69 DB5FD76B2A0AA00' Le = '00'	
5	eUICC → T	INSTALL [for install and make selectable] command responds with an error SW='6XXX'	RQ8.1.6. 61
6	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 10 A00000055910100102736456616C7565'	
7	eUICC → T	GET STATUS command responds with SW='6A88'	
8	T → eUICC	Send SSD-1 INSTALL [for install and make selectable] command to MNO-SD using SCP80 with P1 = '0C' P2 = '00' Data = '07A000000151535008A00000015153504110A00000 055910100102736456616C75650380800034C907810 280008201F0EA29800F01000101000002020112036C 756500C308FD2C7AABF9991364810C000100 08A69DB5FD76B2A0AA00' Le = '00'	4
9	eUICC → T	INSTALL [for install and make selectable] command responds with an error SW='6XXX'	RQ8.1.6. 61
10	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 10 A00000055910100102736456616C7565'	
11	eUICC → T	GET STATUS command responds with SW='6A88'.	

#### 8.2.6.17. Check installing PE Security Domain with specific load package and class AID-s

This test shall check if PE Security Domain of MNO SD with specific load package and class AID is successfully installed.

##### 8.2.6.17.1. *Test execution*

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-9	6.14.10.9
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### 8.2.6.17.2. Initial conditions

None

### 8.2.6.17.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.62
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '80' P2 = '02' Data = '4F 00'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of MNO-SD (#instanceAID)</li> <li>• Life cycle state (#lifeCycleState) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	RQ8.1.7.34b RQ8.1.7.34c

Note: a 2<sup>nd</sup> byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

### 8.2.6.18. Check processData for Security Domain

#### 8.2.6.18.1. Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-21	6.14.1.21
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-11	6.14.10.11
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-21-v3	6.14.1.48
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-11	6.14.10.11
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.6.18.2. Initial conditions

None

8.2.6.18.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.29 RQ8.1.6.46 RQ8.1.6.63
2	eUICC → T	eUICC response with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '42' (Issuer Identification Number).	
5	eUICC → T	GET DATA command responds with • IIN out of #processData. SW='9000'.	
6	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '45' (Card Image Number).	
7	eUICC → T	GET DATA command responds with • CIN out of #processData. SW='9000'.	
8	T → eUICC	Send GET DATA command to MNO-SD using SCP80 with P1 = '00' P2 = '66' (Card Recognition Data).	



9	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Card Recognition Data out of #processData. SW='9000'.</li> </ul>	
---	-----------	--	--

**8.2.6.19.** Check Get Data returns correct SCP11-related parameters when SCP11 is supported in SSD

**8.2.6.19.1.** *Test execution*

**Profile Package v3:**

Test PE name	Reference
Profile-Header-33-v3	6.14.1.63
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-7	6.14.11.9
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.6.19.2.** *Initial conditions*

None.

**8.2.6.19.3.** *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.28 RQ8.1.6.31 RQ8.1.7.34b RQ8.1.6.64 RQ8.1.6.65
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = '00' P2 = '66'	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Security Domain Recognition Data containing Secure Channel Protocol &amp; Options supported by the SSD indicating support of SCP11 with the protocol options '1D'</li> </ul> <p>See Note1 and Note2</p>	

		<ul style="list-style-type: none"> <li>SW='9000'</li> </ul>	
6	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = '00' P2 = 'E0'	
7	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Key Information Template containing #keyIdentifier, #keyVersionNumber, #keyType values for PK.CA-KLOC.ECDSA, SCP11a SK.SD.ECKA, SCP11c SK.SD.ECKA (see 6.14.11.9).</li> <li>SW='9000'.</li> </ul>	
8	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = 'BF' P2 = '21' Data = 'A60483021118' (Control Reference Template with #keyIdentifier, #keyVersionNumber of SCP11a SK.SD.ECKA. See 6.14.11.9)	
9	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>SCP11a ECKA Certificate (see 6.14.11.9).</li> <li>SW='9000'.</li> </ul>	
10	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = 'BF' P2 = '21' Data = 'A60483021518' (Control Reference Template with #keyIdentifier, #keyVersionNumber of SCP11c SK.SD.ECKA. See 6.14.11.9)	
11	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>SCP11c ECKA Certificate (see 6.14.11.9).</li> <li>SW='9000'.</li> </ul>	
12	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = '00' P2 = '83' Data = 'A60C420A43412D4B4C4F432D3031' (Control Reference Template with CA-KLOC Identifier. See 6.14.11.9)	
13	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>#keyIdentifier, #keyVersionNumber of PK.CA- KLOC.ECDSA (see 6.14.11.9).</li> <li>SW='9000'.</li> </ul>	

Note1: The order of the supported SCPs, or the presence of additional supported SCPs shall not be checked.

Note2: according to GlobalPlatform Card Specification there are two encoding options exist for tag '64'. The implementation may use one, or the other one of these formats.

#### 8.2.6.20. Check SCP11 parameters when SCP11c authorization mechanism is supported in SSD

##### 8.2.6.20.1. *Test execution*

**Profile Package v3:**

Test PE name	Reference
Profile-Header-34-v3	6.14.1.64
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-8	6.14.11.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.6.20.2.** *Initial conditions*

None.

**8.2.6.20.3.** *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.28 RQ8.1.6.31 RQ8.1.7.34b RQ8.1.6.64 RQ8.1.6.65
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) . eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = '00' P2 = '66'	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Security Domain Recognition Data containing Secure Channel Protocol &amp; Options supported by the SSD indicating support of SCP11 with the protocol options '3D'</li> </ul> <p>See Note1 and Note2</p> <ul style="list-style-type: none"> <li>SW='9000'</li> </ul>	

Note1: The order of the supported SCPs, or the presence of additional supported SCPs shall not be checked.

Note2: according to GlobalPlatform Card Specification there are two encoding options exist for tag '64'. The implementation may use one, or the other one of these formats.

### 8.2.6.21. Check SCP11 parameters when S16 mode is supported in SSD

#### 8.2.6.21.1. *Test execution*

#### Profile Package v3:

Test PE name	Reference
Profile-Header-35-v3	6.14.1.65
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-9	6.14.11.11
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.6.21.2. *Initial conditions*

None.

#### 8.2.6.21.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.3 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7 RQ8.1.6.28 RQ8.1.6.31 RQ8.1.7.34b RQ8.1.6.64 RQ8.1.6.65
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET DATA command to SSD using SCP80 with P1 = '00' P2 = '66'	
5	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>Security Domain Recognition Data containing Secure Channel Protocol &amp; Options supported by the SSD indicating support of SCP11 with the protocol options '5D'</li> </ul> <p>See Note1 and Note2</p> <ul style="list-style-type: none"> <li>SW='9000'</li> </ul>	

Note1: The order of the supported SCPs, or the presence of additional supported SCPs shall not be checked.

Note2: according to GlobalPlatform Card Specification there are two encoding options exist for tag '64'. The implementation may use one, or the other one of these formats.

8.2.6.22. Check PE-SD Installation when CumulativeGrantedMemory is supported

8.2.6.22.1. Test execution

Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-10	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-10	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.6.22.2. Initial conditions

None.

8.2.6.22.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.6.1 RQ8.1.6.4 RQ8.1.6.5 RQ8.1.6.7
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send GET STATUS command to SSD-10 using SCP80 with	

		P1 = '40' P2 = '02' Data = '4F10 A00000055910100102736456616C7565 5C02 8F90'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>template tag 'E3' including <ul style="list-style-type: none"> <li>8F Tag (Cumulative Granted Non-Volatile Memory) with value as '1000'H.</li> <li>90 Tag (Cumulative Granted Volatile Memory) with value as '1000'H.</li> </ul> See Note </li> <li>SW='9000'.</li> </ul>	RQ8.1.6.67 RQ8.1.6.68 RQ8.1.6.69 RQ8.1.6.70

Note: According to GP Amendment C the length of Tags 8F and 90 can be 2 or 4 bytes

## 8.2.7 Check Application loading and installation

### 8.2.7.1. Check Application PE and mandatory elements in ApplicationInstance

#### 8.2.7.1.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-1	6.14.12.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.7.1.2. Initial conditions

None

### 8.2.7.1.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34a RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	
6	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '20' P2 = '02' Data = '4F 08 #loadPackageAID'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• Executable Load File AID (#loadPackageAID)</li> <li>• Executable Load File Life Cycle State</li> <li>• SW='9000'.</li> </ul>	RQ8.1.7.62

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

8.2.7.2. Check all elements in ApplicationLoadPackage – taking size into account – PE application is mandatory

8.2.7.2.1. *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-2	6.14.12.2
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-2	6.14.12.2
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.2.2. *Initial conditions*

None

8.2.7.2.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.10 RQ8.1.7.11 RQ8.1.7.12 RQ8.1.7.13 RQ8.1.7.14 RQ8.1.7.15 RQ8.1.7.16 RQ8.1.7.17 RQ8.1.7.20 RQ8.1.7.51 RQ8.1.7.52 RQ8.1.7.61



2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status not-enough-memory (4)</li> <li>• identification of PE-Application-2,</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>◦ not-enough-memory (4), OR</li> <li>◦ in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>• identification of PE-Application-2</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status <ul style="list-style-type: none"> <li>◦ not-enough-memory (4), OR</li> <li>◦ in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>• identification of PE-Application-2</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2 <sup>a</sup> RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.15 RQ8.1.11.15c RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	enabling the Profile Package according to 6.11 fail.	

### 8.2.7.3. Check all elements in ApplicationInstance

#### 8.2.7.3.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-3	6.14.12.3
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-3	6.14.12.3
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.7.3.2. Initial conditions**

None

### 8.2.7.3.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.29 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.37 RQ8.1.7.38 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42 RQ8.1.7.48 RQ8.1.7.55 RQ8.1.7.56 RQ8.1.7.58 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to SSD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state (#lifeCycleState) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

#### 8.2.7.4. Error when loading an Application PE and bad library is provided

##### 8.2.7.4.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-4	6.14.12.4
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-4	6.14.12.4
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.7.4.2. Initial conditions

None

##### 8.2.7.4.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.1 RQ8.1.7.6 RQ8.1.7.8

2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>lib-not-supported (8), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of PE-Application-4</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>lib-not-supported (8), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-Application-4</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>lib-not-supported (8), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-Application-4</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.19 RQ8.1.11.19a RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.7.5. Check multiple ApplicationInstance

#### 8.2.7.5.1. *Test execution*

This test is executed only if multiple instances are supported

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-5	6.14.12.5
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-5	6.14.12.5
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.7.5.2. Initial conditions**

None

## 8.2.7.5.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.3 RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34a RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC response with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T → eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID' (first application).	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of the First Instance of application (#instanceAID)</li> <li>• Life cycle state ('07'H ) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	
6	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID' (second application).	RQ8.1.6.7  RQ8.1.7.3
7	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of the Second Instance of application (#instanceAID)</li> <li>• Life cycle state ('07'H ) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

### 8.2.7.6. Check processData

#### 8.2.7.6.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-6	6.14.12.6
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-6	6.14.12.6
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.7.6.2. *Initial conditions*

None



### 8.2.7.6.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34a RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.40RQ8.1.7.41 RQ8.1.7.42 RQ8.1.7.43 RQ8.1.7.44 RQ8.1.7.45 RQ8.1.7.46 RQ8.1.7.55 RQ8.1.7.60 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC response with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T → eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application1 (#instanceAID)</li> <li>• Life cycle state ('07'H ) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	
6	T → eUICC	Send GET DATA command to TAR Application 6 using SCP80 with P1 = '00' P2 = '92' Lc = '00' Le = '00'.	
7	eUICC → T	GET DATA command responds with <ul style="list-style-type: none"> <li>• #processData information.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

### 8.2.7.7. Error when loading Application PE and the lifecycle of SD is not PERSONALISED

#### 8.2.7.7.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-2	6.14.11.2
PE-Application-3	6.14.12.3
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-2	6.14.11.2
PE-Application-3	6.14.12.3
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.7.7.2. Initial conditions

None

#### 8.2.7.7.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.69b RQ8.1.7.61
2	eUICC → T	<p>If TCA_VERSION is 3.1, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status invalid-parameter (6)</li> <li>identification of PE-Application-3</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status invalid-parameter (6)</li> <li>identification of PE-Application-3</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.17 RQ8.1.11.17d RQ8.1.11.17e RQ8.1.11.17g RQ8.1.11.25 RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

8.2.7.8. Check all elements in ApplicationLoadPackage – taking size into account – PE application is not mandatory

8.2.7.8.1. *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-7	6.14.12.7
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-7	6.14.12.7
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.8.2. *Initial conditions*

None

8.2.7.8.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.8 RQ8.1.7.10 RQ8.1.7.11 RQ8.1.7.12 RQ8.1.7.13 RQ8.1.7.14 RQ8.1.7.15 RQ8.1.7.16 RQ8.1.7.17 RQ8.1.7.20 RQ8.1.7.51 RQ8.1.7.52 RQ8.1.7.61

2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>not-enough-memory (4), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of PE-Application-7</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>not-enough-memory (4), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-Application-7</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>not-enough-memory (4), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-Application-7</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.5 RQ8.1.11.6 RQ8.1.11.15 RQ8.1.11.15c RQ8.1.11.25 RQ8.1.11.30</p>
3	T ↔ eUICC	enabling the Profile Package according to 6.11 fail.	

**8.2.7.9.** Check all elements in ApplicationInstance when eUICC supports tag list '5C' with tag 'CF'

#### **8.2.7.9.1. Test execution**

##### **Profile Package v2:**

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-3	6.14.12.3
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-3	6.14.12.3
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.7.9.2. Initial conditions

None

#### 8.2.7.9.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.29 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.37 RQ8.1.7.38 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42 RQ8.1.7.48 RQ8.1.7.50 RQ8.1.7.55 RQ8.1.7.56 RQ8.1.7.58  RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to SSD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID 5C 05 4F 9F70 C5 CF'	
5	eUICC → T	GET STATUS command responds with • AID of application (#instanceAID)	

		<ul style="list-style-type: none"> <li>• Life cycle state (#lifeCycleState) See Note_1</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present See Note_2</li> <li>• Implicit Selection Parameter (#implicitSelectionParameter)</li> <li>• SW='9000'.</li> </ul>	
--	--	---	--

Note\_1: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

Note\_2: SCP Registry Data may not be present in the response

#### 8.2.7.10. Check loaded libraries within a PE-Application

##### 8.2.7.10.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-8	0
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-8	0
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.7.10.2. *Initial conditions*

None

### 8.2.7.10.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.1 RQ8.1.7.6 RQ8.1.7.8
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '10' P2 = '02' Data = '4F 08' #loadPackageAID	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• Load Package AID (#loadPackageAID)</li> <li>• Life cycle state ('01') See Note</li> <li>• First Executable Module AID (A000000559101001112233)</li> </ul> Note2 SW='9000'.	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

Note2: This value is inside loadBlockObject and it corresponds to COMPONENT\_Applet (Tag 03) according to [JAVACARD VM].

### 8.2.7.11. Check PE-Application installation when Memory Management is supported.

#### 8.2.7.11.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-27	6.14.1.27
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-9	6.14.12.9
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-9	6.14.12.9
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.11.2. *Initial conditions*

None



### 8.2.7.11.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.29 RQ8.1.7.31 RQ8.1.7.35  RQ8.1.7.37 RQ8.1.7.38 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42 RQ8.1.7.47 RQ8.1.7.48 RQ8.1.7.55 RQ8.1.7.58
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to SSD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state (#lifeCycleState) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> <li>• SW='9000'.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

**8.2.7.12.** Installing profile with contactless eUICC Mandatory service selected and userInteractionContactlessParameters, eUICC reports error.

**8.2.7.12.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-12	6.14.1.12
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-10	6.14.12.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-12-v3	6.14.1.39
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-10	6.14.12.10
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.7.12.2.** *Initial conditions*

None

## 8.2.7.12.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.31 RQ8.1.7.35 RQ8.1.7.37 RQ8.1.7.39 RQ8.1.7.41 RQ8.1.7.42  RQ8.1.7.61 RQ8.1.7.65 RQ8.1.7.66
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW:            eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status               <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>different from (0)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1:            eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status               <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE:            eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status               <ul style="list-style-type: none"> <li>feature-not-supported (10), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.21 RQ8.1.11.22b RQ8.1.11.2 RQ8.1.11.2 <sup>a</sup> RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

**8.2.7.13.** Check the contactlessProtocolParameters (Type A Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected.

**8.2.7.13.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-12	6.14.1.12
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-11	6.14.12.11
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-12-v3	6.14.1.39
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-11	6.14.12.11
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.7.13.2.** *Initial conditions*

None

8.2.7.13.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.29 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34a RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.37 RQ8.1.7.38 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42  RQ8.1.7.61 RQ8.1.7.63 RQ8.1.7.64
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11	
4	T → eUICC	Send GET STATUS command to SSD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID 5C 03 4F 87 88'	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Assigned Protocols for Implicit Selection ('81')</li> <li>• Initial Contactless Activation State ('00')</li> </ul> SW='9000'.	

8.2.7.14. Check Application PE loaded using the SHA-1 algorithm for the "hashValue" related to the loadBlockObject.

8.2.7.14.1. *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-27	6.14.1.27
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-12	6.14.12.12
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-27-v3	6.14.1.54
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-12	6.14.12.12
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.14.2. *Initial conditions*

None

## 8.2.7.14.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9  RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.18 RQ8.1.7.19 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.34a RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	RQ8.1.6.7
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data is present</li> </ul> SW='9000'.	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

**8.2.7.15.** Check Application PE installed setting the Additional Contactless Parameters (reader mode protocol data Type A) according to the ETSI TS 102.226.

**8.2.7.15.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-22	6.14.1.22
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-13	6.14.12.13
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-22-v3	6.14.1.49
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-13	6.14.12.13
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.7.15.2.** *Initial conditions*

None



## 8.2.7.15.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9  RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.34a RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.54 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.67 RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	RQ8.1.6.7
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• Implicit selection parameter (#implicitSelectionParameter)</li> <li>• SCP Registry Data is present SW='9000'.</li> </ul>	

Note1: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

Note\_2: the Implicit selection parameter may not be present in the response. If present its value shall be verified.

8.2.7.16. Check Application PE installed setting the SIM File Access and Toolkit Parameters according to ETSI TS 102.226

8.2.7.16.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-31	6.14.1.27
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-14	6.14.12.14
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-31-v3	6.14.1.54
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-14	6.14.12.14
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.16.2. *Initial conditions*

The TERMINAL PROFILE sent to the eUICC by the test tool during the eUICC initialization procedure contains SET UP MENU also.

## 8.2.7.16.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.53  RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9  RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.34a RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	RQ8.1.6.7
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data ('EA0B8009010201020301030501'H) SW='9000'.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

**8.2.7.17.** Check Application PE installed setting UICC System Specific Parameters according to ETSI TS 102.226

**8.2.7.17.1.** *Test execution*

**Profile Package v2:**

Test PE name	Reference
Profile-Header-31	6.14.1.61
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-15	6.14.12.14
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-31-v3	6.14.1.62
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-15	6.14.12.14
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.7.17.2.** *Initial conditions*

The TERMINAL PROFILE sent to the eUICC by the test tool during the eUICC initialization procedure contains SET UP MENU also.

### 8.2.7.17.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.53  RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9  RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.34a RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0) . eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	RQ8.1.6.7
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• SCP Registry Data ('EA0B8009010201020301030501'H) SW='9000'.</li> </ul>	

Note: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

8.2.7.18. Check the contactlessProtocolParameters (Type B Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected.

### 8.2.7.18.1. Test execution

Profile Package v2:

Test PE name	Reference
Profile-Header-12	6.14.1.12
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-16	6.14.12.16
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-12-v3	6.14.1.39
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-16	6.14.12.16
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.18.2. *Initial conditions*

None

### 8.2.7.18.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.29 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34a RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.37 RQ8.1.7.38 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42  RQ8.1.7.61 RQ8.1.7.63 RQ8.1.7.64b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11	
4	T → eUICC	Send GET STATUS command to SSD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID 5C 03 4F 87 88'	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Assigned Protocols for Implicit Selection ('82')</li> <li>• Initial Contactless Activation State ('00')</li> </ul> SW='9000'.	

8.2.7.19. Check the contactlessProtocolParameters (Type F Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected.

### 8.2.7.19.1. Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-12	6.14.1.12
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-17	6.14.12.17
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-12-v3	6.14.1.39
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-Application-17	6.14.12.17
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.19.2. *Initial conditions*

None



### 8.2.7.19.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.28 RQ8.1.7.29 RQ8.1.7.31 RQ8.1.7.33 RQ8.1.7.34a RQ8.1.7.34b RQ8.1.7.35 RQ8.1.7.37 RQ8.1.7.38 RQ8.1.7.39 RQ8.1.7.40 RQ8.1.7.41 RQ8.1.7.42  RQ8.1.7.61 RQ8.1.7.63 RQ8.1.7.64c
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11	
4	T → eUICC	Send GET STATUS command to SSD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID 5C 03 4F 87 88'	
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Assigned Protocols for Implicit Selection ('84')</li> <li>• Initial Contactless Activation State ('00')</li> </ul> SW='9000'.	

8.2.7.20. Check Application PE installed setting the Additional Contactless Parameters (reader mode protocol data Type B) according to the ETSI TS 102.226.

### 8.2.7.20.1. Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-22	6.14.1.22
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-18	6.14.12.18
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-22-v3	6.14.1.49
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-USIM-by-Template-1-v2	6.14.5.1.11
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-Application-18	6.14.12.18
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.7.20.2. *Initial conditions*

None

## 8.2.7.20.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9  RQ8.1.7.4 RQ8.1.7.5 RQ8.1.7.8 RQ8.1.7.20 RQ8.1.7.22 RQ8.1.7.24 RQ8.1.7.26 RQ8.1.7.30 RQ8.1.7.31 RQ8.1.7.34a RQ8.1.7.35 RQ8.1.7.39 RQ8.1.7.54 RQ8.1.7.55 RQ8.1.7.61 RQ8.1.7.67b RQ8.1.7.69
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package (see description in 6.11).	
4	T → eUICC	Send GET STATUS command to MNO-SD using SCP80 with P1 = '40' P2 = '02' Data = '4F 0C #instanceAID'.	RQ8.1.6.7
5	eUICC → T	GET STATUS command responds with <ul style="list-style-type: none"> <li>• AID of application (#instanceAID)</li> <li>• Life cycle state ('07'H) See Note</li> <li>• Privileges (#applicationPrivileges)</li> <li>• Implicit selection parameter (#implicitSelectionParameter)</li> <li>• SCP Registry Data is present SW='9000'.</li> </ul>	

Note1: a 2nd byte may be returned containing the Contactless Activation State. The value of the Contactless Activation State shall not be verified.

Note\_2: the Implicit selection parameter may not be present in the response. If present its value shall be verified.

## 8.2.8 Check RFM parameters

### 8.2.8.1. Installing PE-RFM with adfRFMAccess

#### 8.2.8.1.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.8.1.2. *Initial conditions*

None.

#### 8.2.8.1.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send SELECT by FILE ID command to the RFM instance using SCP80 with Data = '2F00'.	

5	eUICC → T	SELECT command fails with an error SW '6A 82' - File not found	RQ8.1.8.18
6	T → eUICC	Send SELECT by FILE ID command with Data = '6F07' and READ BINARY with Length = 9 to the RFM instance using SCP80	
7	eUICC → T	SELECT by FILE ID and READ BINARY commands succeed (SW '90 00')	RQ8.1.8.18

### 8.2.8.2. Installing PE-RFM without adfRFMAccess

#### 8.2.8.2.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.8.2.2. *Initial conditions*

None.

#### 8.2.8.2.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	

4	T → eUICC	Send SELECT by FILE ID command to the RFM instance using SCP80 with Data = '6F07'.	
5	eUICC → T	SELECT command fails with error SW '6A 82' - File not found ,or SW '69 85' – Condition of use is not satisfied.	RQ8.1.8.17
6	T → eUICC	Send SELECT by FILE ID command to the RFM instance using SCP80 with Data = '2F00'.	
7	eUICC → T	SELECT command succeeds (SW '90 00')	RQ8.1.8.19

### 8.2.8.3. Installing profile with two difference PE-RFMs

#### 8.2.8.3.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.8.3.2. *Initial conditions*

None.

### 8.2.8.3.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PESTatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send SELECT by FILE ID command to the RFM instance_1 (TAR value is B00000) using SCP80 with Data = '6F07'.	
5	eUICC → T	SELECT command succeeds (SW '90 00')	RQ8.1.8.2 RQ8.1.8.4
6	T → eUICC	Send SELECT by FILE ID command to the RFM instance_2 (TAR value is B00002) using SCP80 with Data = '2F00'.	
7	eUICC → T	SELECT command succeeds (SW '90 00')	RQ8.1.8.2 RQ8.1.8.4

### 8.2.8.4. Installing PE-RFM associated to SSD1

#### 8.2.8.4.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-3	6.14.13.5
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-3	6.14.13.5
PE-END-1	6.14.14.1

### 8.2.8.4.2. Initial conditions

None.

### 8.2.8.4.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Send SELECT by FILE ID command to the RFM instance using SCP80 with the SCP80 parameters of SSD1 and with Data = '2F00'.	
5	eUICC → T	SELECT command succeeds (SW '90 00')	RQ8.1.8.3 RQ8.1.8.19



## 8.2.9 Check Non standardised content

### 8.2.9.1. No error when installing non mandatory PE-NonStandard

#### 8.2.9.1.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
PE-NonStandard-1	6.14.15.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.9.1.2. Initial conditions

None.

#### 8.2.9.1.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.38
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification object.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify that the content is the same as defined in the MF-by-Generic-File-Management-1	

## 8.2.9.2. Error when installing mandatory PE-NonStandard

### 8.2.9.2.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-1	6.14.1.1
PE-NonStandard-2	6.14.15.2
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
PE-NonStandard-2	6.14.15.2
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

### 8.2.9.2.2. Initial conditions

None.

### 8.2.9.2.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status different from (0)</li> <li>identification of PE-NonStandard-2</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> <li>identification of PE-NonStandard-2</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> <li>identification of PE-NonStandard-2</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.1.8 RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.25 RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fails.	

### 8.2.9.3. Warning when installing non mandatory PE-NonStandard

#### 8.2.9.3.1. Test execution

#### Profile Package v3:

Test PE name	Reference
Profile-Header-1-v3	6.14.1.28
PE-NonStandard-1	6.14.15.1
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-2	6.14.5.1.4
PE-PINCodes-Local-PIN-1	6.14.8.1
OPT-USIM-by-Generic-File-Management-1	6.14.5.2.2
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.9.3.2. Initial conditions

None.

### 8.2.9.3.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.38
2	eUICC → T	eUICC responds with PEStatus different from (0) and identification of PE-NonStandard-1. eUICC response contains no profileInstallationAborted object.	RQ7.1.1.5a RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	

### 8.2.10 Check Profile Package end

Requirements related to Profile Package end are tested in 8.2.3.

### 8.2.11 Check eUICC Response

#### 8.2.11.1. Check unsupported major version

##### 8.2.11.1.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-3	6.14.1.3
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-3-v3	6.14.1.30
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.11.1.1. Initial conditions

None

##### 8.2.11.1.2. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status unsupported-profile-version (31)</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status unsupported-profile-version (31)</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status unsupported-profile-version (31)</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.2.5 RQ8.1.11.23 RQ8.1.11.23a RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

#### 8.2.11.2. Check unsupported template in Profile Header

##### 8.2.11.2.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-4	6.14.1.4
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-4-v3	6.14.1.31
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.11.2.2. Initial conditions

None

### 8.2.11.2.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>different from (0)</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.2.19 RQ8.1.11.20 RQ8.1.11.20b RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.11.3. Check offset in eUICC Response with error

#### 8.2.11.3.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-4	6.14.1.4
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-4-v3	6.14.1.31
MF-by-Generic-File-Management-1	6.14.2.1.2
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
USIM-by-Generic-File-Management-1	6.14.5.1.2
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.11.3.2. *Initial conditions*

None

#### 8.2.11.3.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION IS 2.2: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>different from (0)</li> </ul> </li> <li>offset value between 43 and 50 inclusive</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>offset with value between 43 and 50 inclusive.</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.28 RQ8.1.11.29 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

#### 8.2.11.4. Check unknown tag in Profile Package

##### 8.2.11.4.1. *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-20	6.14.1.20
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-4 (See Note)	6.14.2.4.5
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1
Note: When creating the DER code for this Test Case at least the DF-CUSTOM-by-Generic-File-Management-4 shall be created using PEDefinitions V2.100_with_unknownTag.asn. The PEDefinitions V2.100_with_unknownTag.asn is available for download on the TCA website.	

#### Profile Package v3:

Test PE name	Reference
Profile-Header-20-v3	6.14.1.47
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
DF-CUSTOM-by-Generic-File-Management-4 (See Note)	6.14.2.4.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1
Note: When creating the DER code for this Test Case at least the DF-CUSTOM-by-Generic-File-Management-4 shall be created using PEDefinitions V3.3.100_with_unknownTag.asn. The PEDefinitions V3.3.100_with_unknownTag.asn is available for download on the TCA website.	

##### 8.2.11.4.2. *Initial conditions*

None



### 8.2.11.4.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION is 3.1, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status invalid-parameter (6)</li> <li>identification of DF-CUSTOM-by-Generic-File-Management-4</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status invalid-parameter (6)</li> <li>identification of DF-CUSTOM-by-Generic-File-Management-4</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ7.1.1.8 RQ8.1.2.7 RQ8.1.11.17 RQ8.1.11.17b RQ8.1.11.17e RQ8.1.11.17g RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.11.5. Warning if GBA not supported

#### 8.2.11.5.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-5	6.14.5.2.10
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.5.1.11
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-5-v2	6.14.5.2.12
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.5.2. Initial conditions

None

#### 8.2.11.5.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If Profile Package v2 is used: eUICC responds with PESTatus containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5 and additional-information field set to '1'. eUICC response contains no profileInstallationAborted object</p> <p>If Profile Package v3 is used: eUICC responds with PESTatus containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5-v2 and additional-information field set to '1'. eUICC response contains no profileInstallationAborted object</p>	<p>RQ8.1.11.22 RQ8.1.11.22e RQ8.1.11.22g RQ8.1.11.22k</p>
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF UST from the ADF USIM and ensure that service no 68 is not available.	RQ8.1.11.22i
5	T ↔ eUICC	<p>If Profile Package v2 is used: Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-5. EF GBABP, EF GBANL and EF NAFKCA shall not be present.</p> <p>If Profile Package v3 is used: Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-5-v2. EF GBABP, EF GBANL and EF NAFKCA shall not be present.</p>	RQ8.1.11.22h

### 8.2.11.6. Warning if MBMS not supported

#### 8.2.11.6.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-5	6.14.5.2.10
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-5-v2	6.14.5.2.12
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.6.2. *Initial conditions*

None

### 8.2.11.6.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If Profile Package v2 is used: eUICC responds with PESTatus containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5 and additional-information field set to '2'. eUICC response contains no profileInstallationAborted object</p> <p>If Profile Package v3 is used: eUICC responds with PESTatus containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5-v2 and additional-information field set to '2'. eUICC response contains no profileInstallationAborted object</p>	<p>RQ8.1.11.22 RQ8.1.11.22e RQ8.1.11.22g RQ8.1.11.22k</p>
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF UST from the ADF USIM and ensure that service no 69 is not available.	RQ8.1.11.22i
5	T ↔ eUICC	<p>If Profile Package v2 is used: Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-5. EF MSK and EF MUK shall not be present.</p> <p>If Profile Package v3 is used: Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-5-v2. EF MSK and EF MUK shall not be present.</p>	RQ8.1.11.22h

### 8.2.11.7. Warning if GBA and MBMS not supported

#### 8.2.11.7.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-5	6.14.5.2.10
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-5-v2	6.14.5.2.12
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.7.2. *Initial conditions*

None

## 8.2.11.7.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If Profile Package v2 is used:  eUICC responds with PESTatus containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5 and additional-information field set to '3'.  eUICC response contains no profileInstallationAborted object  OR  eUICC responds with multiple PESTatus fields containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5, one PESTatus with additional-information field set to '1' and another PESTatus with additional-information field set to '2'.  eUICC response contains no profileInstallationAborted object</p> <p>If Profile Package v3 is used:  eUICC responds with PESTatus containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5-v2 and additional-information field set to '3'.  eUICC response contains no profileInstallationAborted object  OR  eUICC responds with multiple PESTatus fields containing status (10) feature-not-supported and identification of PE-OPT-USIM-by-Template-5-v2, one PESTatus with additional-information field set to '1' and another PESTatus with additional-information field set to '2'.  eUICC response contains no profileInstallationAborted object</p>	RQ8.1.11.22 RQ8.1.11.22e RQ8.1.11.22g RQ8.1.11.22k
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF UST from the ADF USIM and ensure that service no 68 and service no 69 are not available.	RQ8.1.11.22i
5	T ↔ eUICC	<p>If Profile Package v2 is used:  Select all files in OPT USIM and verify their FCPs  Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-5.  EF GBABP, EF MSK, EF MUK, EF GBANL and EF NAFKCA shall not be present.</p> <p>If Profile Package v3 is used:  Select all files in OPT USIM and verify their FCPs  Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-5-v2.  EF GBABP, EF MSK, EF MUK, EF GBANL and EF NAFKCA shall not be present.</p>	RQ8.1.11.22h

### 8.2.11.8. Error if GBA not supported

#### 8.2.11.8.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6	6.14.5.2.11
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6-v2	6.14.5.2.13
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.8.2. *Initial conditions*

None

### 8.2.11.8.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If Profile Package v2 is used and (TCA_VERSION is 3.1, OR BELOW):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6</li> <li>• additional-information set to '1'</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v2 is used and (TCA_VERSION IS 3.2, OR ABOVE):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6</li> <li>• additional-information set to '1'</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v3 is used and (TCA_VERSION is 3.1, OR BELOW):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6-v2</li> <li>• additional-information set to '1'</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v3 is used and (TCA_VERSION IS 3.2, OR ABOVE):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6-v2</li> <li>• additional-information set to '1'</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.11.22  RQ8.1.11.22d  RQ8.1.11.22f  RQ8.1.11.22j  RQ8.1.11.30</p>
3	T ↔ eUICC	Enable Profile Package according to 6.11 shall fail.	



### 8.2.11.9. Error if MBMS not supported

#### 8.2.11.9.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6	6.14.5.2.11
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6-v2	6.14.5.2.13
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.9.2. *Initial conditions*

None

### 8.2.11.9.3. Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If Profile Package v2 is used and (TCA_VERSION is 3.1, OR BELOW):</p> <p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6</li> <li>• additional-information set to '2'</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v2 is used and (TCA_VERSION IS 3.2, OR ABOVE):</p> <p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6</li> <li>• additional-information set to '2'</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v3 is used and (TCA_VERSION is 3.1, OR BELOW):</p> <p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6-v2</li> <li>• additional-information set to '2'</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v3 is used and (TCA_VERSION IS 3.2, OR ABOVE):</p> <p>eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6-v2</li> <li>• additional-information set to '2'</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.11.22</p> <p>RQ8.1.11.22d</p> <p>RQ8.1.11.22f</p> <p>RQ8.1.11.22j</p> <p>RQ8.1.11.30</p>
3	T ↔ eUICC	Enable Profile Package according to 6.11 shall fail.	

### 8.2.11.10. Error if GBA and MBMS not supported

#### 8.2.11.10.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6	6.14.5.2.11
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6-v2	6.14.5.2.13
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.10.2. Initial conditions

None

*8.2.11.10.3. Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If Profile Package v2 is used and (TCA_VERSION is 3.1, OR BELOW):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6</li> <li>• additional-information set to '3', or '2', or '1'</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v2 is used and (TCA_VERSION IS 3.2, OR ABOVE):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6</li> <li>• additional-information set to '3', or '2', or '1'</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v3 is used and (TCA_VERSION is 3.1, OR BELOW):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6-v2</li> <li>• additional-information set to '3', or '2', or '1'</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If Profile Package v3 is used and (TCA_VERSION IS 3.2, OR ABOVE):  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>• status feature-not-supported (10)</li> <li>• identification of PE-OPT-USIM-by-Template-6-v2</li> <li>• additional-information set to '3', or '2', or '1'</li> <li>• offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.11.22  RQ8.1.11.22d  RQ8.1.11.22f  RQ8.1.11.22j  RQ8.1.11.30</p>
3	T ↔ eUICC	Enable Profile Package according to 6.11 shall fail.	

### 8.2.11.11. No error if GBA and MBMS supported

#### 8.2.11.11.1. *Test execution*

##### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-9	6.14.5.1.19
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6	6.14.5.2.11
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-9-v2	6.14.5.1.20
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-6-v2	6.14.5.2.13
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### 8.2.11.11.2. *Initial conditions*

None

#### 8.2.11.11.3. *Test procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC response with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.4 RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF UST from the ADF USIM and ensure that service no 68 and service no 69 are still available.	

5	T ↔ eUICC	<p>If Profile Package v2 is used: Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-6.</p> <p>If Profile Package v3 is used: Select all files in OPT USIM and verify their FCPs Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-6-v2.</p>	RQ8.1.3.22
---	-----------	--	------------

#### 8.2.11.12 Error when template version is not supported in a mandatory PE MF

##### 8.2.11.12.1 *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-7	6.14.2.1.10
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-3	6.14.5.1.5
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-7	6.14.2.1.10
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

##### 8.2.11.12.2 *Initial conditions*

None

## 8.2.11.12.3 Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW:  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of PE-MF-by-Template-7</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1:  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-MF-by-Template-7</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE:  eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-MF-by-Template-7</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	RQ8.1.11.20 RQ8.1.11.20c RQ8.1.11.20d RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

8.2.11.13 Error when template version is not supported in a non-mandatory PE MF

## 8.2.11.13.1 Test execution

Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-8	6.14.2.1.11
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-3-v2	6.14.5.1.13
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

### 8.2.11.13.2 Initial conditions

None

### 8.2.11.13.3 Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with peStatus containing: <ul style="list-style-type: none"> <li>status               <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-MF-by-Template-8</li> <li>offset value</li> </ul> The last eUICC response contains profileInstallationAborted object.	RQ8.1.11.20 RQ8.1.11.20d RQ8.1.11.20g RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.11.14 Error when template version is not supported in a mandatory PE USIM

#### 8.2.11.14.1 Test execution

**Profile Package v2:**



Test PE name	Reference
Profile-Header-2	6.14.1.2
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-CD-by-Template-1	6.14.2.2.1
PE-USIM-by-Template-19	6.14.5.1.31
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-2-v3	6.14.1.29
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-CD-by-Template-1	6.14.2.2.1
PE-USIM-by-Template-19	6.14.5.1.31
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

8.2.11.14.2 Initial Conditions

None

8.2.11.14.3 Test procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	

2	eUICC → T	<p>If TCA_VERSION is 2.2, OR BELOW: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of PE-USIM-by-Template-19</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 2.3, OR 2.3.1, OR 3.1: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-USIM-by-Template-19</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p> <p>If TCA_VERSION IS 3.2, OR ABOVE: eUICC responds with peStatus containing:</p> <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>in the range of [1...11] or [31] or [24576...28671] or [36864...40959]</li> </ul> </li> <li>identification of PE-USIM-by-Template-19</li> <li>offset value</li> </ul> <p>The last eUICC response contains profileInstallationAborted object.</p>	<p>RQ8.1.11.20 RQ8.1.11.20c RQ8.1.11.20e RQ8.1.11.20h RQ8.1.11.20j RQ8.1.11.30</p>
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fail.	

### 8.2.11.15 Warning when template version is not supported in a non-mandatory PE GSM ACCESS

#### 8.2.11.15.1 *Test execution*

#### Profile Package v2:

Test PE name	Reference
Profile-Header-17	6.14.1.18
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-5	6.14.5.1.7
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-GSM-ACCESS-by-Template-2	6.14.5.3.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-17-v3	6.14.1.44
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-CD-by-Template-1	6.14.2.2.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-5-v2	6.14.5.1.15
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-GSM-ACCESS-by-Template-2	6.14.5.3.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-SecurityDomain-SSD-1	6.14.11.1
PE-RFM-1	6.14.13.1
PE-RFM-2	6.14.13.2
PE-END-1	6.14.14.1

**8.2.11.15.2 Initial Conditions**

None

**8.2.11.15.3 Test procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10.	
2	eUICC → T	eUICC responds with peStatus containing: <ul style="list-style-type: none"> <li>status <ul style="list-style-type: none"> <li>template-not-supported (9), OR</li> <li>different from (0)</li> </ul> </li> <li>identification of PE-GSM-ACCESS-by-Template-2</li> </ul> eUICC response contains no profileInstallationAborted object.	RQ8.1.11.20 RQ8.1.11.20f RQ8.1.11.20i RQ8.1.11.20k
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.11.20f RQ8.1.11.20i
6	T → eUICC	Select the USIM application	
7	T ↔ eUICC	Select DF GSM ACCESS (fileID '5F3B') and verify that it does not exist e.g. SW '6A82'.	RQ8.1.11.20f RQ8.1.11.20i

## 8.2.12 Check SUCI Calculation by USIM

### 8.2.12.1. SUCI Calculation by default system application – IMSI-based SUPI, Profile A

#### 8.2.12.1.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-24	6.14.1.24
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-8	6.14.5.1.10
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1	6.14.5.5.1
PE-SAIP-by-Template-1	6.14.5.6.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-24-v3	6.14.1.51
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-14-v2	6.14.5.1.25
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1-v3	6.14.5.5.5
PE-SAIP-by-Template-1	6.14.5.6.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.12.1.2. Initial Conditions

None.

#### 8.2.12.1.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6b RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 35 01 32F401F0FF 01 01 [USIM Public] 32 bytes [Concealed SUPI] 5 bytes [MAC Tag] 8 bytes 9000	RQ8.1.2.3 RQ8.1.3.27 RQ8.1.12.4
8	T	Using the received [USIM Public] and the Home Network Private Key as defined in Section 6.14.5.6.1 PE-SAIP-by-Template-1 the Test Tool: <ul style="list-style-type: none"> <li>• decrypts the received [Concealed SUPI] and checks, if it equals to '9134876765'H</li> <li>• verifies the [MAC Tag]</li> </ul>	

#### 8.2.12.2. SUCI Calculation by default system application – IMSI-based SUPI, Profile B

##### 8.2.12.2.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-25	6.14.1.25
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-8	6.14.5.1.10
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1	6.14.5.5.1
PE-SAIP-by-Template-2	6.14.5.6.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**Profile Package v3:**

Test PE name	Reference
Profile-Header-25-v3	6.14.1.52
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-14-v2	6.14.5.1.25
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1-v3	6.14.5.5.5
PE-SAIP-by-Template-2	6.14.5.6.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

**8.2.12.2.2. Initial Conditions**

None.

**8.2.12.2.3. Test Procedure**

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6b RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 36 01 32F401F0FF 02 01 [USIM Public] 33 bytes [Concealed SUPI] 5 bytes [MAC Tag] 8 bytes 9000	RQ8.1.2.3 RQ8.1.3.27 RQ8.1.12.4

---

8	T	<p>Using the received [USIM Public] and the Home Network Private Key as defined in Section 6.14.5.6.2 PE-SAIP-by-Template-2 the Test Tool:</p> <ul style="list-style-type: none"><li>• decrypts the received [Concealed SUPI] and checks, if it equals to '9134876765'H</li><li>• verifies the [MAC Tag]</li></ul>	
---	---	--	--

### 8.2.12.3. SUCI Calculation by default system application – IMSI-based SUPI, Null Scheme

#### 8.2.12.3.1. Test execution

##### Profile Package v2:

Test PE name	Reference
Profile-Header-26	6.14.1.26
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-8	6.14.5.1.10
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1	6.14.5.5.1
PE-SAIP-by-Template-3	6.14.5.6.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### Profile Package v3:

Test PE name	Reference
Profile-Header-26-v3	6.14.1.53
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-14-v2	6.14.5.1.25
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1-v3	6.14.5.5.5
PE-SAIP-by-Template-3	6.14.5.6.3
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.12.3.2. Initial Conditions

None.

#### 8.2.12.3.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6b RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10



3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 0D 01 32F401F0FF 00 00 9134876765 9000	RQ8.1.2.3 RQ8.1.3.27 RQ8.1.12.3a

#### 8.2.12.4. SUCI Calculation by default system application – NAI-based SUPI, Profile A

##### 8.2.12.4.1. Test execution

#### Profile Package v3:

Test PE name	Reference
Profile-Header-24-v3	6.14.1.51
PE-MF-by-Template-6	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-16-v2	6.14.5.1.27
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-3-v3	6.14.5.5.6
PE-SAIP-by-Template-1	6.14.5.6.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-5	6.14.13.7
PE-END-1	6.14.14.1

##### 8.2.12.4.2. Initial Conditions

None.

##### 8.2.12.4.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6a RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 8190 11 74797065312E726964302E7363686964312E686E6B6 579312E6563636B6579 [USIM Public] 64 bytes 2E636970 [Concealed SUPI username] 12 bytes 2E6D6163 [MAC Tag] 16 bytes 406578616D706C652E636F6D 9000	RQ8.1.2.3 RQ8.1.3.27 RQ8.1.12.4
8	T	Using the received [USIM Public] and the Home Network Private Key as defined in Section 6.14.5.6.1 PE-SAIP-by-Template-1 the Test Tool: <ul style="list-style-type: none"> <li>• decrypts the received [Concealed SUPI username] and checks, if it equals to '757365723137'H</li> <li>• verifies the [MAC Tag]</li> </ul>	

### 8.2.12.5. SUCI Calculation by default system application – NAI-based SUPI, Profile B

#### 8.2.12.5.1. Test execution

#### Profile Package v3:

Test PE name	Reference
Profile-Header-25-v3	6.14.1.52
PE-MF-by-Template-6	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-16-v2	6.14.5.1.27
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-3-v3	6.14.5.5.6
PE-SAIP-by-Template-2	6.14.5.6.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-5	6.14.13.7
PE-END-1	6.14.14.1

#### 8.2.12.5.2. Initial Conditions

None.

### 8.2.12.5.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6a RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 8192 11 74797065312E726964302E7363686964322E686E6B6 579312E6563636B6579 [USIM Public] 66 bytes 2E636970 [Concealed SUPI username] 12 bytes 2E6D6163 [MAC Tag] 16 bytes 406578616D706C652E636F6D 9000	RQ8.1.2.3 RQ8.1.3.27 RQ8.1.12.4
8	T	Using the received [USIM Public] and the Home Network Private Key as defined in Section 6.14.5.6.2 PE-SAIP-by-Template-2 the Test Tool: <ul style="list-style-type: none"> <li>decrypts the received [Concealed SUPI username] and checks, if it equals to '757365723137'H</li> <li>verifies the [MAC Tag]</li> </ul>	

### 8.2.12.6. SUCI Calculation by default system application – NAI-based SUPI, Null Scheme

#### 8.2.12.6.1. Test execution

**Profile Package v3:**

---

Test PE name	Reference
Profile-Header-26-v3	6.14.1.53
PE-MF-by-Template-6	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-16-v2	6.14.5.1.27
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-3-v3	6.14.5.5.6
PE-SAIP-by-Template-3	6.14.5.6.3
PE-AKAParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-5	6.14.13.7
PE-END-1	6.14.14.1

### 8.2.12.6.2. Initial Conditions

None.

### 8.2.12.6.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6a RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 2B 11 74797065312E726964302E7363686964302E75736572 6964757365723137406578616D706C652E636F6D 9000	RQ8.1.2.3 RQ8.1.3.27 RQ8.1.12.3a

### 8.2.12.7. SUCI Calculation by default system application – IMSI-based SUPI, Profile A, wrong Key Index

#### 8.2.12.7.1. Test execution

#### Profile Package v2:

Test PE name	Reference
Profile-Header-24	6.14.1.24
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-8	6.14.5.1.10
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1	6.14.5.5.1
PE-SAIP-by-Template-4	6.14.5.6.4
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### Profile Package v3:

Test PE name	Reference
Profile-Header-24-v3	6.14.1.51
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-14-v2	6.14.5.1.25
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1-v3	6.14.5.5.5
PE-SAIP-by-Template-4	6.14.5.6.4
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### 8.2.12.7.2. Initial Conditions

None.

### 8.2.12.7.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6b RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	
7	eUICC → T	GET IDENTITY command returns with: A1 0D 01 32F401F0FF 00 00 (See Note) 9134876765 9000	RQ8.1.2.3 RQ8.1.12.1 RQ8.1.12.3b

Note: the test tool shall not check the value of this byte

### 8.2.12.8. SUCI Calculation by default system application – IMSI-based SUPI, Profile B, wrong Key Index

#### 8.2.12.8.1. Test execution

**Profile Package v2:**

Test PE name	Reference
Profile-Header-25	6.14.1.24
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1	6.14.2.3.1
PE-USIM-by-Template-8	6.14.5.1.10
PE-OPT-USIM-by-Template-1	6.14.5.2.1
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1	6.14.5.5.1
PE-SAIP-by-Template-5	6.14.5.6.5
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### Profile Package v3:

Test PE name	Reference
Profile-Header-25-v3	6.14.1.51
PE-MF-by-Template-1	6.14.2.1.1
PE-PUKCodes-1	6.14.3.1
PE-PINCodes-1	6.14.4.1
PE-TELECOM-by-Template-1-v2	6.14.2.3.5
PE-USIM-by-Template-14-v2	6.14.5.1.25
PE-OPT-USIM-by-Template-1-v2	6.14.5.2.6
PE-PINCodes-Local-PIN-1	6.14.8.1
PE-5GS-by-Template-1-v3	6.14.5.5.5
PE-SAIP-by-Template-5	6.14.5.6.5
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

### 8.2.12.8.2. Initial Conditions

None.

### 8.2.12.8.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.41 RQ8.1.1.42 RQ8.1.12.5 RQ8.1.12.6b RQ8.1.12.7b
2	eUICC → T	eUICC responds with PEStatus containing status ok (0). eUICC response contains no profileInstallationAborted object. eUICC response contains no PE Identification.	RQ8.1.11.9 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T → eUICC	Select the USIM application	
5	T → eUICC	Send VERIFY PIN pinAppl1	
6	T → eUICC	Send GET IDENTITY command with: P1 = '00' P2 = '01' Le = '00'	

7	eUICC → T	GET IDENTITY command returns with: A1 0D 01 32F401F0FF 00 00 (See Note) 9134876765 9000	RQ8.1.2.3 RQ8.1.12.1 RQ8.1.12.3b
---	-----------	--	--

Note: the test tool shall not check the value of this byte

### 8.2.13 Check IoT Minimal Profile

#### 8.2.13.1. Installing IoT Minimal Profile by template

##### 8.2.13.1.1. *Test execution*

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-1	6.14.17.1
PE-OPT-IoT-by-Template-1	6.14.18.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.13.1.2. *Initial Conditions*

None.

##### 8.2.13.1.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43 RQ8.1.1.44  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	



4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.15
6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content.	RQ8.1.3.15
8	T ↔ eUICC	Select all files in OPT IoT and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.22
9	T ↔ eUICC	Read all files in OPT IoT and verify their content.	RQ8.1.3.15

### 8.2.13.2. Installing 5G files in IoT Minimal Profile by template

#### 8.2.13.2.1. Test execution

##### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-2	6.14.17.2
PE-OPT-IoT-by-Template-2	6.14.18.2
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.2.2. Initial Conditions

None.

#### 8.2.13.2.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43 RQ8.1.1.44  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3

2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.15
6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content.	RQ8.1.3.15
8	T ↔ eUICC	Select all files in OPT IoT and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.22
9	T ↔ eUICC	Read all files in OPT IoT and verify their content.	RQ8.1.3.15

### 8.2.13.3. Error when the installation of IoT Minimal Profile is not supported

#### 8.2.13.3.1. Test execution

##### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-1	6.14.17.1
PE-OPT-IoT-by-Template-1	6.14.18.1
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.3.2. Initial Conditions

None.

#### 8.2.13.3.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with peStatus containing: <ul style="list-style-type: none"> <li>status               <ul style="list-style-type: none"> <li>feature-not-supported (10)</li> </ul> </li> <li>offset value</li> </ul> The last eUICC response contains profileInstallationAborted object.	RQ8.1.2.24  RQ8.1.11.2 RQ8.1.11.2a RQ8.1.11.25 RQ8.1.11.30
3	T ↔ eUICC	Enabling Profile Package according to 6.11 fails.	

#### 8.2.13.4. Installing USIM files by template with OPT-USIM in IoT Minimal Profile

##### 8.2.13.4.1. Test execution

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-3	6.14.17.3
PE-OPT-IoT-by-Template-3	6.14.18.3
PE-OPT-USIM-by-Template-9-v2	6.14.5.2.16
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

##### 8.2.13.4.2. Initial Conditions

None.

## 8.2.13.4.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.39  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.15 RQ8.1.3.17
6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs..	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read all files in ADF USIM except the EF UST and verify their content.	RQ8.1.3.17
8	T ↔ eUICC	Select all files in OPT IoT and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.16
9	T ↔ eUICC	Read all files in OPT IoT and verify their content. Only those files shall be present which are explicitly included in PE-OPT-IoT-by-Template-3.	RQ8.1.3.16
10	T ↔ eUICC	Select all files in OPT USIM and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.16
11	T ↔ eUICC	Read all files in OPT USIM and verify their content. Only those files shall be present which are explicitly included in PE-OPT-USIM-by-Template-9-v2.	RQ8.1.3.16

### 8.2.13.5. Installing IoT Minimal Profile containing Generic File Management

#### 8.2.13.5.1. *Test execution*

##### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-1	6.14.17.1
PE-OPT-IoT-by-Template-1	6.14.18.1
DF-CUSTOM-by-Generic-File-Management-7	6.14.2.4.10
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.5.2. *Initial Conditions*

None.

#### 8.2.13.5.3. *Test Procedure*

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43 RQ8.1.1.44  RQ8.1.2.1 RQ8.1.2.25 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select all files in MF and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read all files in MF except EF UMPC and verify their content.	RQ8.1.3.15
6	T ↔ eUICC	Select all files in ADF USIM and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read all files in ADF USIM except EF UST and verify their content.	RQ8.1.3.15

8	T ↔ eUICC	Select all files in OPT IoT and verify their FCPs.	RQ8.1.3.10 RQ8.1.3.22
9	T ↔ eUICC	Read all files in OPT IoT and verify their content.	RQ8.1.3.15
10	T ↔ eUICC	Select all files in DF CUSTOM and verify their FCPs.	RQ8.1.3.22
11	T ↔ eUICC	Read all files in DF CUSTOM and verify their content	RQ8.1.3.15

### 8.2.13.6. Altering default access rule in IoT Minimal Profile

#### 8.2.13.6.1. Test execution

##### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-4	6.14.17.4
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.6.2. Initial Conditions

None.

#### 8.2.13.6.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF ARR from the MF and verify its FCP.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22

5	T ↔ eUICC	Read EF ARR (under the MF) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1, except for record (access rule) 2 which will contain 800111A406830101950108 80014AA40683010A950108 FF..FF.	RQ8.1.3.14 RQ8.1.3.15 RQ8.1.3.30
6	T ↔ eUICC	Select EF ARR from ADF USIM and verify its FCP.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read EF ARR (under the ADF USIM) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1, except for record (access rule) 2 which will contain 800111A406830101950108 80014AA40683010A950108 FF..FF.	RQ8.1.3.31

### 8.2.13.7. Adding additional access rule in IoT Minimal Profile

#### 8.2.13.7.1. Test execution

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-5	6.14.17.5
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.7.2. Initial Conditions

None.

#### 8.2.13.7.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10

3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF ARR from the MF and verify its FCP.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read EF ARR (under the MF) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1, except for an additional record (access rule) 9 which has been added and will contain 800103A406830101950108 800158A40683010A950108 840132A406830101950108 FF..FF.	RQ8.1.3.14 RQ8.1.3.15 RQ8.1.3.30
6	T ↔ eUICC	Select EF ARR from ADF USIM and verify its FCP.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read EF ARR (under the ADF USIM) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1, except for an additional record (access rule) 9 which has been added and will contain 800103A406830101950108 800158A40683010A950108 840132A406830101950108 FF..FF.	RQ8.1.3.31

### 8.2.13.8. Removing default access rule in IoT Minimal Profile

#### 8.2.13.8.1. Test execution

#### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-6	6.14.17.6
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.8.2. Initial Conditions

None.

#### 8.2.13.8.3. Test Procedure



Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF ARR from the MF and verify its FCP.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read EF ARR (under the MF) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1, except for record (access rule) 8 which will not exist.	RQ8.1.3.14 RQ8.1.3.30
6	T ↔ eUICC	Select EF ARR from ADF USIM and verify its FCP.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read EF ARR (under the ADF USIM) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1, except for record (access rule) 8 which will not exist.	RQ8.1.3.31

### 8.2.13.9. Changing USIM ef-arr from linked to independent file

#### 8.2.13.9.1. *Test execution*

##### IoT Minimal Profile Package v3:

Test PE name	Reference
IoT-Minimal-Profile-Header-1	6.14.16.1
PE-IoT-by-Template-7	6.14.17.7
PE-AKAPParameters-1	6.14.9.1
PE-SecurityDomain-MNO-SD-1	6.14.10.1
PE-RFM-1	6.14.13.1
PE-END-1	6.14.14.1

#### 8.2.13.9.2. *Initial Conditions*

None.

## 8.2.13.9.3. Test Procedure

Step	Direction	Description	RQ
1	T → eUICC	Load Profile Package to the eUICC according to 6.10 .	RQ8.1.1.6 RQ8.1.1.7 RQ8.1.1.9 RQ8.1.1.12 RQ8.1.1.28a RQ8.1.1.29a RQ8.1.1.39 RQ8.1.1.43  RQ8.1.2.1 RQ8.1.2.27  RQ8.1.10.1 RQ8.1.10.2 RQ8.1.10.3
2	eUICC → T	eUICC responds with PEStatus containing status ok (0) eUICC response contains no profileInstallationAborted object eUICC response contains no PE Identification object.	RQ8.1.11.4 RQ8.1.11.9a RQ8.1.11.10
3	T ↔ eUICC	Enable Profile Package according to 6.11.	
4	T ↔ eUICC	Select EF ARR from the MF and verify its FCP.	RQ8.1.3.10 RQ8.1.3.17 RQ8.1.3.22
5	T ↔ eUICC	Read EF ARR (under the MF) and verify its content. The content of EF ARR shall match the default content as defined in Section 9.10.3 of [SA PP TS] v3.3.1.	RQ8.1.3.30
6	T ↔ eUICC	Select EF ARR from ADF USIM and verify its FCP.	RQ8.1.3.3 RQ8.1.3.10 RQ8.1.3.14 RQ8.1.3.17 RQ8.1.3.22
7	T ↔ eUICC	Read EF ARR (under the ADF USIM) and verify that its content is the same as defined in ef-arr-usim in PE-IoT-by-Template-5.	RQ8.1.3.14 RQ8.1.3.15 RQ8.1.3.29

## 9. ANNEX A (Informative) : Java files

TCA provides the .java and .cap files which are used in the PE Applications defined in this specification. These files will be available for download on TCA website.

The .cap files are compiled using JCDK v3.0.3. Required APIs are defined in the following specifications:

-Java Card v3.0.3

-ETSI TS 102241 v6.12.0

-3GPP 31.130 v6.4.1

-3GPP 43.019 v5.6.0

-Java Card API and Java Card Export File v1.2 for GlobalPlatform Card Specification v2.2

## 10. ANNEX B (Normative) : SFI values

The tables below contain the list of those files for which the related specification mandates the support of Short File Identifier and also defines a concrete SFI value.

### 10.1 ANNEX B1 (Normative) : SFI values in MF

FID	EF Name	SFI
2F05	EF PL	05
2F00	EF DIR	1E
2F08	EF UMPC	08

### 10.2 ANNEX B2 (Normative) : SFI values in DF TELECOM

FID	EF Name	SFI
4F20	EF MLPL	01
4F21	EF MSPL	02
4F22	EF MMSSMODE	03

### 10.3 ANNEX B3 (Normative) : SFI values in ADF USIM

FID	EF Name	SFI
6F07	EF IMSI	07
6F06	EF ARR	17
6F08	EF Keys	08
6F09	EF KeysPS	09
6F31	EF HPPLMN	12
6F38	EF UST	04
6F56	EF EST	05
6F5B	EF START-HFN	0F
6F5C	EF THRESHOLD	10
6F73	EF PSLOC	0C
6F78	EF ACC	06
6F7B	EF FPLMN	0D

6F7E	EF LOCI	0B
6FAD	EF AD	03
6FB7	EF ECC	01
6FE3	EF EPSLOCI	1E
6FE4	EF EPSNSC	18

#### 10.4 ANNEX B4 (Normative) : SFI values in OPT USIM

FID	EF Name	SFI
6F05	EF LI	02
6F48	EF CBMID	0E
6F60	EF PLMNwAct	0A
6F61	EF OPLMNwAcT	11
6F62	EF HPLMNwAcT	13
6F4F	EF CCP2	16
6F80	EF ICI	14
6F81	EF OCI	15
6FC5	EF PNN	19
6FC6	EF OPL	1A
6FCD	EF SPDI	1B
6FD9	EF EHPLMN	1D

#### 10.5 ANNEX B5 (Normative) : SFI values in ADF ISIM

FID	EF Name	SFI
6F02	EF IMPI	02
6F04	EF IMPU	04
6F03	EF Domain	05
6F07	EF IST	07
6FAD	EF AD	03
6F06	EF ARR	06

#### 10.6 ANNEX B6 (Normative) : SFI values in ADF CSIM

FID	EF Name	SFI
6F06	EF ARR	17
6F22	EF IMSI_M	04
6F23	EF IMSI_T	05
6F24	EF TMSI	06
6F28	EF CDMAHOME	0C
6F2A	EF SNREGI	0D
6F2C	EF ACCOLC	03
6F30	EF PRL	07

6F32	EF CSIM_ST	02
6F3A	EF LI	0A
6F43	EF AD	01

### 10.7 ANNEX B7 (Normative) : SFI values in OPT CSIM

FID	EF Name	SFI
6F41	EF SPN	08
6F47	EF ECC	09
6F5A	EF EPRL	0E
6F6B	EF 3GCIK	0B
6F75	EF EST	0F
6F7C	EF ICI	10
6F7D	EF OCI	11
6F7F	EF CCP2	12

### 10.8 ANNEX B8 (Normative) : SFI values in DF GSM ACCESS

FID	EF Name	SFI
4F20	EF Kc	01
4F52	EF KcGPRS	02

## 11. ANNEX C (Informative) : Document history

The table below indicates changes that have been incorporated into the present document since it was created by TCA.

Version	Date	Brief Description of Change
V1.0.	14/04/2016	1st Release of Document
V2.0.	06/07/2016	<ul style="list-style-type: none"> <li>-Test PE-s are updated in Ch 6.12 to align to eUICC Profile Package: Interoperable Format Technical Specification v2.0; also new Test PE-s are added.</li> <li>-RQs are updated in Ch 7.1 and 8.1 to align to eUICC Profile Package: Interoperable Format Technical Specification v2.0; also new RQs are added.</li> <li>-Test cases are updated, especially new Test PE-s are referenced.</li> <li>-New test cases are added: 8.2.1.1; 8.2.1.8; 8.2.3.6.</li> <li>-References are updated, applicability table and related chapters are updated, Ch 6.7 is updated.</li> </ul>
V2.1	17/05/2017	<p>Major changes:</p> <ul style="list-style-type: none"> <li>-in Chapter 6.6 the General Initial Conditions are updated</li> <li>-Chapter 6.8 (Indications concerning support of features) is deleted</li> <li>-Chapter 6.14 Test PE description (Ch 6.12 in v2.0) is restructured and updated</li> <li>-in Chapter 7.1 and 8.1 the Test Requirements are updated to align to Technical Specification v2.1</li> </ul>

		<p>-Chapter 8.2 is restructured</p> <p>-the following new TC-es are added:</p> <p>8.2.3.3.Installing USIM files by template with OPT-USIM-2</p> <p>8.2.3.4. Installing USIM files by template with BER-TLV files in ServicesList.</p> <p>8.2.3.5. Error when installing PE-USIM when eUICC does not support USIM.</p> <p>8.2.3.6 Warning when installing USIM files by template with BER-TLV files in a non mandatory PE when eUICC does not support BER-TLV.</p> <p>8.2.3.7. Warning when creating a DF with dfLink in a non mandatory PE when eUICC does not support dfLink.</p> <p>8.2.3.8. Creating a DF with dfLink when eUICC supports dfLink is added</p> <p>8.2.3.9. Creating a DF with dfLink when eUICC supports dfLink and dfLink in ServicesList is added</p> <p>8.2.3.10. Installing CSIM files by template is added</p> <p>8.2.3.11. Installing ISIM files by template is added</p> <p>8.2.4.1. Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE is added</p> <p>8.2.4.2. Installing PE-AKAPParameters with TUAK and sending AUTHENTICATE is added</p> <p>8.2.5.1 Installing PINs in enabled state.</p> <p>8.2.5.2 Installing PINs in disabled state.</p> <p>8.2.7.7 Error when loading Application PE and the lifecycle of SD is not personalised</p> <p>8.2.7.8 Check all elements in ApplicationLoadPackage – taking size into account – PE application is not mandatory</p> <p>8.2.7.9 Check all elements in ApplicationInstance when eUICC supports tag list '5C' is added</p> <p>8.2.8.1 Installing PE-RFM with adfRFMAccess.</p> <p>8.2.8.2 Installing PE-RFM without adfRFMAccess.</p> <p>8.2.11.1 Check unsupported major version.</p> <p>8.2.11.2 Check unsupported template.</p> <p>-several TC-es are updated</p> <p>-TC 8.2.1.4 Installing profile without ProfileHeader PE is deleted</p> <p>-new Test PE-s are defined in Chapter 6.14</p> <p>-several Test PE-s are updated and renamed, one Test PE is deleted</p> <p>-DER codes are deleted from the Test PE descriptions</p> <p>-Annex A added</p>
V2.1.1	02/01/2018	<p>Updates:</p> <p>-in Section 6.1 Item 19 is updated</p> <p>-in Section 6.2 in Table 2 the applicability of the following TC-es are changed:</p> <p>TC 8.2.3.6</p> <p>TC 8.2.7.2</p> <p>TC 8.2.7.8</p> <p>TC 8.2.7.9</p> <p>-a new subsection : 6.6.4 Specific rule for FCP verification is added</p> <p>-the following ASN1 files are updated:</p> <p>6.14.1.5. Profile-Header-5</p>

		<p>6.14.1.8. Profile-Header-8 (update is related to the M2M version only)</p> <p>6.14.2.2.1. PE-CD-by-Template-1</p> <p>6.14.2.2.2. DF-CD-by-Generic-File-Management-1</p> <p>6.14.2.3.1. PE-TELECOM-by-Template-1</p> <p>6.14.2.3.2. PE-TELECOM-by-Template-2</p> <p>6.14.2.3.3. PE-TELECOM-by-Template-3</p> <p>6.14.4.2. PE-PINCodes-2</p> <p>6.14.5.1.1. PE-USIM-by-Template-1</p> <p>6.14.5.1.2. USIM-by-Generic-File-Management-1</p> <p>6.14.5.1.3. PE-USIM-by-Template-2</p> <p>6.14.5.1.4. USIM-by-Generic-File-Management-2</p> <p>6.14.5.1.5. PE-USIM-by-Template-3</p> <p>6.14.5.1.6. PE-USIM-by-Template-4</p> <p>6.14.5.2.3. PE-OPT-USIM-by-Template-2</p> <p>6.14.6.1.1. PE-ISIM-by-Template-1</p> <p>6.14.7.1.1. PE-CSIM-by-Template-1</p> <p>6.14.7.2.1. PE-OPT-CSIM-by-Template-1</p> <p>6.14.8.1. PE-PINCodes-Local-PIN-1</p> <p>6.14.9.3. PE-AKAPParameters-3</p> <p>6.14.10.5. PE-SecurityDomain-MNO-SD-5</p> <p>6.14.11.2. PE-SecurityDomain-SSD-2</p> <p>6.14.12.2. PE-Application-2</p> <p>6.14.12.3. PE-Application-3</p> <p>6.14.12.5. PE-Application-5</p> <p>6.14.12.6. PE-Application-6</p> <p>6.14.13.4. PE-RFM-CSIM</p> <p>-in Section 8.1.X RQ8.1.6.7 and REQ8.1.6.36a are updated to align to the Technical Specification</p> <p>-in Section 8.1.X RQ8.1.1.8, RQ8.1.7.7 RQ8.1.7.18 , RQ8.1.7.19 , RQ8.1.11.17 and RQ8.1.11.17b became "FFS"</p> <p>-the following TC-es are updated:</p> <p>8.2.3.1</p> <p>8.2.3.7</p> <p>8.2.3.10</p> <p>8.2.3.11</p> <p>8.2.3.2</p> <p>8.2.3.3</p> <p>8.2.3.4</p> <p>8.2.3.6</p> <p>8.2.4.1</p> <p>8.2.4.2</p> <p>8.2.6.1</p> <p>8.2.6.2</p> <p>8.2.6.5</p> <p>8.2.7.1</p> <p>8.2.7.2</p> <p>8.2.7.3</p> <p>8.2.7.5</p> <p>8.2.7.6</p>
--	--	---

		<p>8.2.7.8 8.2.7.9</p> <p>-the referenced REQ list is updated in several TC-es: in Section 8.2.3 , in Section 8.2.6, in Section 8.2.7</p>
V2.1.2	13/07/2018	<p>The following sections are updated:</p> <ul style="list-style-type: none"> <li>-in Section 3.1 Normative References two new references are added</li> <li>-in Section 4 Abbreviations is extended with the definition of SFI</li> <li>-in Section 6.2 the applicability of TC 8.2.3.6 is updated</li> <li>-in Section 6.2 the applicability of TC 8.2.7.9 is updated</li> <li>-in Section 6.6.4 Specific rules for FCP verification has been restructured: the existing definition is moved under subsection 6.6.4.1 and a new subsection 6.6.4.2. Tag 'DO88' (SFI) is added</li> <li>-in Section 6.2 in Table 2 the applicability of the following TC-es are changed: 8.2.3.6 and 8.2.7.9</li> <li>-in Section 6.6.1.1. M2M Architecture one of the initial conditions have been updated to aling to [GS RPAT] v3.2</li> <li>-in Section 8.1.7 Application loading and installation RQ8.1.7.47 is marked as FFS requirement</li> <li>-the referenced REQ list is updated in test cases 8.2.7.3 and 8.2.7.9</li> </ul> <p>The following new sections are added:</p> <ul style="list-style-type: none"> <li>-6.6.5 Specific rules for file content verification</li> <li>-Annex B (Normative) : SFI values</li> </ul> <p>The following test cases are updated</p> <ul style="list-style-type: none"> <li>-in Section 8.2.6.2.3. - Step 4 it is specified that the GET DATA command shall be sent using SCP80.</li> <li>-in Section 8.2.6.4.3. - Step 4 and Step 6 it is specified that the GET DATA command shall be sent using SCP80.</li> <li>-in Section 8.2.6.5.3. - Step 4 it is specified that the GET DATA command shall be sent using SCP80.</li> </ul> <p>The following Test PE-s are updated:</p> <ul style="list-style-type: none"> <li>-6.14.1.2. Profile-Header-2</li> <li>-6.14.1.2. Profile-Header-5</li> <li>-6.14.2.3.1. PE-TELECOM-by-Template-1</li> <li>-6.14.2.3.2. PE-TELECOM-by-Template-2</li> <li>-6.14.2.3.3. PE-TELECOM-by-Template-3</li> <li>-6.14.5.2.3. PE-OPT-USIM-by-Template-2</li> <li>-6.14.6.1.1. PE-ISIM-by-Template-1</li> <li>-6.14.7.1.1. PE-CSIM-by-Template-1</li> <li>-6.14.7.2.1. PE-OPT-CSIM-by-Template-1</li> <li>-6.14.12.3. PE-Application-3</li> <li>-6.14.12.7. PE-Application-7</li> </ul>
V2.2	2019.February 15.	<p>Major changes:</p> <p>-the following new test cases are added:</p> <p>8.2.2.1. Error when cat-tp in ServicesList and eUICC does not support CAT_TP</p>



		<p>8.2.2.2. Error when package in eUICC-Mandatory-AIDs is not known</p> <p>8.2.2.3. Error when version in eUICC-Mandatory-AIDs is not supported</p> <p>8.2.2.4. No error when package and version in eUICC-Mandatory-AIDs is known and supported</p> <p>8.2.3.12. Installing USIM files by template without content</p> <p>8.2.3.13. Creating file instances with and without explicitly set file ID</p> <p>8.2.3.14. Error when installing PE-CSIM when eUICC does not support CSIM</p> <p>8.2.3.15. Installing GSM-ACCESS files by template</p> <p>8.2.3.16. Installing USIM Phonebook files by template</p> <p>8.2.3.17. Installing EAP files by template</p> <p>8.2.4.3. Installing PE-AKAPParameters with usim-test-algorithm and sending AUTHENTICATE</p> <p>8.2.4.4. Installing PE-AKAPParameters with TUAK with 256 bit key and restricted length and sending AUTHENTICATE</p> <p>8.2.4.5. Installing PE-AKAPParameters with TUAK with 256 bit key and sending AUTHENTICATE</p> <p>8.2.4.6. Installing PE-AKAPParameters with TUAK with numberOfKeccak and restricted lengths and sending AUTHENTICATE</p> <p>8.2.4.7. Installing PE-AKAPParameters with TUAK with numberOfKeccak and sending AUTHENTICATE</p> <p>8.2.4.8. Error when authCounterMax exceeded</p> <p>8.2.4.9. Test Milenage PIN verification and defined constants</p> <p>8.2.4.10. Blocked SQN with wrap around deactivated (content is FFS)</p> <p>8.2.4.11. Testing SQN delta and age limit</p> <p>8.2.4.12. Test usim-test-algorithm with 32 bit RES length</p> <p>8.2.4.13. Installing PE-CDMAParameters and send COMPUTE ID AUTHENTICATE in Simple IP CHAP Mode</p> <p>8.2.4.14. Installing PE-CDMAParameters and send COMPUTE ID AUTHENTICATE in Simple IP HRPD Access Mode</p> <p>8.2.4.15. Installing PE-CDMAParameters and send COMPUTE ID AUTHENTICATE in Mobile IP Mode</p> <p>8.2.4.16. Installing USIM and ISIM with sharing NAA parameters</p> <p>8.2.5.3. Installing different PINs with different PUKs</p> <p>8.2.5.4. Checking the access domain validity of an RFM instance in case of a blocked PIN</p> <p>8.2.5.5. Checking the PIN context of a Global PIN</p> <p>8.2.5.6. Checking the PIN context of a Local PIN</p> <p>8.2.5.7. Checking the "PIN state change allowed" and "PIN state change not allowed" status</p> <p>8.2.5.8. Checking the "PIN can be changed" and "PIN cannot be changed" status</p> <p>8.2.5.9. Error when no consistency between pinStatusTemplateDO and PE PINCodes Local</p> <p>8.2.6.6. Check CASD Personalisation – Scenario #3</p> <p>8.2.6.7. Check CASD personalization – Scenario#2B</p> <p>8.2.6.8. Check installing an SSD under a self extradited SSD</p> <p>8.2.6.9. Check initial counter is default when keyCounterValue absent</p>
--	--	--

		<p>8.2.6.10. Error when installing KeyObject parameter not supported</p> <p>8.2.7.10. Check loaded libraries within a PE-Application</p> <p>8.2.7.11. Check PE-Application installation when Memory Management is supported.</p> <p>8.2.7.12. Installing profile with contactless eUICC Mandatory service selected and userInteractionContactlessParameters, eUICC reports error</p> <p>8.2.7.13. Check the contactlessProtocolParameters set inside the ApplicationInstance with contactless eUICC Mandatory service selected.</p> <p>8.2.8.4. Installing PE-RFM associated to SSD1</p> <p>8.2.9.1. No error when installing non mandatory PE-NonStandard</p> <p>8.2.11.3. Check offset in eUICC Response with error</p> <p>-the following test case is deleted: 8.2.1.5. Installing profile with PE-USIM before PE-MF</p> <p>-in TC 8.2.3.10 Step 7 and 9 is updated (bugfix)</p> <p>-several test cases are updated to check that the eUICC response contains no profileInstallationAborted object when eUICC responds with PESTatus (0) ok</p> <p>-some requirements are added in some Test Sequences as tested requirements</p> <p>-several new Test PE-s are added in Section 6.14</p> <p>-some Test PE-s are updated</p> <p>-new Optional features are added in Table 1 (Section 6.1)</p> <p>-several new REQ-s are added and some existing REQ-s are updated in Section 7 and 8</p> <p>-Section 2 is updated</p> <p>-Section 3.1 is updated</p> <p>-Section 6.1 is updated : the support of O_JAVACARD is mandated</p> <p>-Section 6.6.4.2 is updated</p> <p>-new Section 6.6.4.4. is added with a clarification for file system checking by test tool</p> <p>-new Section 6.6.4.5 is added with a clarification for checking Tag '82' (File Descriptor)</p> <p>-new Section 6.6.6 is added with a clarification regarding possible returned status codes</p> <p>-new Section 6.6.7 is added about the usage of ISO interface</p>
V2.2.1	2019.04.10.	<p>The following new section is added: -Section 6.6.8 is about the handling of GET STATUS response</p> <p>The following Test PE-s are updated: -6.14.2.4.4. ADF-CUSTOM-by-Generic-File-Management-1 PE -6.14.7.1.1. PE-CSIM-by-Template-1 -6.14.7.1.2. PE-CSIM-by-Template-2</p>

		<p>The following new Test PE is added: -6.14.8.5. PE-PINCodes-Local-PIN-5</p> <p>The following test cases are updated: -8.2.3.10. Installing CSIM files by template -8.2.3.14. Error when installing PE-CSIM when eUICC does not support CSIM -8.2.4.13. Installing PE-CDMAParameters and send COMPUTE ID AUTHENTICATE in Simple IP CHAP Mode -8.2.4.14. Installing PE-CDMAParameters and send COMPUTE ID AUTHENTICATE in Simple IP HRPD Access Mode -8.2.4.15. Installing PE-CDMAParameters and send COMPUTE ID AUTHENTICATE in Mobile IP Mode -8.2.5.6. Checking the PIN context of a Local PIN</p> <p>The applicability of test case 8.2.5.6 is changed</p>
V2.2.2	2019.07.12	<p>The following sections are updated: -Section 6.6.7. ISO interface</p> <p>The following new Test PE is added: -6.14.2.1.6. MF-by-Generic-File-Management-2</p> <p>The following Test PE-s are updated: -6.14.2.4.4. ADF-CUSTOM-by-Generic-File-Management-1</p> <p>The following test cases are updated: -8.2.5.6. Checking the PIN context of a Local PIN -8.2.5.7. Checking the “PIN state change allowed” and “PIN state change not allowed” status -8.2.5.8. Checking the “PIN can be changed” and “PIN cannot be changed” status -8.2.6.6. Check CASD Personalisation – Scenario #3 -8.2.6.7. Check CASD Personalisation – Scenario #2B -8.2.6.9. Check initial counter is default when keyCounterValue absent -8.2.6.10. Error when installing KeyObject parameter not supported</p>
V2.3	2020.03.10	<p>Section 3.1 is updated Section 6.1 is updated Section 6.2 is updated Section 6.6.4.6 is added Section 6.6.6 is updated Section 6.14 is updated</p> <p>Section 8.1 is updated RQ-s in the test sequences are reordered and updated The javacard service became optional. It resulted in several changes, especially in the applicability of the test cases, in the profile headers and in the Test Profiles</p> <p>Some Test PE-s are added/updated/deleted in Section 6.14</p> <p>New TC-es:</p>

		<p>8.2.3.18. Error when installing USIM files by template with BER-TLV files in a mandatory PE when eUICC does not support BER-TLV</p> <p>8.2.3.19. Installing USIM files by template using proprietaryEFInfo</p> <p>8.2.3.20 Installing profile with multiple FileManagement elements</p> <p>8.2.3.21. Installing multiple USIM by template</p> <p>8.2.4.10. Blocked SQN with wrap around deactivated</p> <p>8.2.4.17. Installing PE-AKAPParameters with MILENAGE and sending AUTHENTICATE in 2G mode</p> <p>8.2.4.18. Installing USIM and ISIM with shared SQN</p> <p>8.2.4.19. Installing multiple PE-AKAPParameters with MILENAGE and TUAK and sending AUTHENTICATE</p> <p>8.2.5.10. Checking Local PIN handling</p> <p>8.2.5.11 Checking the PIN context of a Local PIN</p> <p>8.2.7.14. Check Application PE loaded using the SHA-1 algorithm for the "hashValue" related to the loadBlockObject</p> <p>8.2.7.15. Check Application PE installed setting the Additional Contactless Parameters according to the ETSI TS 102.226</p> <p>8.2.9.2. Error when installing mandatory PE-NonStandard</p> <p>8.2.11.4. Check unknown tag in Profile Package</p> <p>8.2.12.1. SUCI Calculation by default system application – Profile A</p> <p>8.2.12.2. SUCI Calculation by default system application – Profile B</p> <p>8.2.12.3. SUCI Calculation by default system application – Null Scheme</p> <p>Deleted TC-es:</p> <p>8.2.6.6. Check CASD Personalisation – Scenario #3</p> <p>8.2.6.7. Check CASD Personalisation – Scenario #2B</p> <p>Several TC-es are updated</p> <p>Expected error statuses are updated in the following TC-es:</p> <p>8.2.1.2</p> <p>8.2.1.3</p> <p>8.2.1.4</p> <p>8.2.2.1</p> <p>8.2.3.5</p> <p>8.2.3.14</p> <p>8.2.6.3</p> <p>8.2.7.2</p> <p>8.2.7.4</p> <p>8.2.7.8</p> <p>8.2.7.12</p> <p>8.2.11.2</p> <p>8.2.11.3</p> <p>The title of TC 8.2.4.13; 8.2.4.14 and 8.2.4.15 is updated</p> <p>Annex B8 is added</p>
V2.3.1	2020.September	<p>In Section 3.1 four new normative references are added.</p> <p>In Section 6.2 C031 is updated (editorial update in the Mnemonic)</p> <p>TC 8.2.5.10.1 is updated to use a different PE</p> <p>TC 8.2.5.11.3 Step 10 is updated to allow eUICC returning '91 xx'.</p>

		<p>TC 8.2.11.4.1 is updated (editorial change in the title of one Test PE name)</p> <p>TC 8.2.12.1.3 Step 8 is updated (editorial change to clarify that the Private Key is not part of the PE, but defined in the referenced section)</p> <p>TC 8.2.12.2.3 Step 8 is updated (editorial change to clarify that the Private Key is not part of the PE, but defined in the referenced section)</p>
V3.1	2021.September	<p>Section 3 is updated</p> <p>Section 4 is updated</p> <p>Section 6.1 is updated</p> <p>New Section 6.1.1 is added</p> <p>The value of volatileDataLimitC7 is changed to 000FFFFFF in O_MEMORY_LIMIT, PE Application-2 and PE Application-7.</p> <p>Testing of implementations based on SA PP TS v3.1 is added.</p> <p>Testing of implementations based on SA PP TS v2.0 is removed.</p> <p>Rules are added in Section 6.2 for testing the different versions of the eUICC. Especially for testing a v3.1 eUICC which supports v2.3.1 Profile Package also.</p> <p>Section 6.6.4.1 Tag 'A5' is updated for BER-TLV file verification.</p> <p>New Section 6.6.9 is added for checking the length of the statusMessage field.</p> <p>Section "6.6.5.2 Ber-tlv files created with content FF..FF" is updated</p> <p>New Section 6.6.5.3 PIN Verification is added</p> <p>Section 6.9 is updated.</p> <p>Several Test PE-s in Section 6.14 are updated</p> <p>Several new Test PE-s in Section 6.14 are added</p> <p>New Section 6.15 is added for Profile Package definition.</p> <p>New requirements in Section 8.1 are added</p> <p>Several TC-es are updated</p> <p>Profile Package v3 definitions are added to the test cases</p> <p>The sentence for file content verification is updated to be applicable for both v2 and v3 PP-s.</p> <p>The presence and FCP of EF UMPC is verified. All related TC-es in Section 8.2.3 and 8.2.9 are updated.</p> <p>New TC-es added:</p> <p>8.2.2.5 No error when profileType is of maximum length (Latin symbols)</p> <p>8.2.3.22 Installing ISIM files by version2 template</p> <p>8.2.3.23 Installing TELECOM files by version2 template</p> <p>8.2.3.24 Creating a DF with linked EF</p> <p>8.2.3.25 Creating a EF using filePath</p> <p>8.2.3.26 Creating a EF using filePath of zero length</p> <p>8.2.3.27. Installing 5G files by template</p> <p>8.2.3.28. Installing 5G files by version2 template</p> <p>8.2.3.29. Installing OPT USIM files by version2 template</p> <p>8.2.3.30. Installing 5G files by version3 template with service 136 available</p>

		<p>8.2.6.11. Check SCP parameters stored in Card Recognition Data when SCP02 supported in SSD</p> <p>8.2.6.12. Check SCP parameters stored in Card Recognition Data</p> <p>8.2.6.13. Check LCS when no value is provided in lifeCycleState parameter</p> <p>8.2.7.16 Check Application PE installed setting the SIM File Access Toolkit Parameters according to ETSI TS 102.226</p> <p>8.2.9.3 Warning when installing non mandatory PE-NonStandard</p> <p>8.2.11.5 Warning if GBA not supported</p> <p>8.2.11.6 Warning if MBMS not supported</p> <p>8.2.11.7 Warning if GBA and MBMS not supported</p> <p>8.2.11.8 Error if GBA not supported</p> <p>8.2.11.9 Error if MBMS not supported</p> <p>8.2.11.10 Error if GBA and MBMS not supported</p> <p>8.2.11.11 No error if GBA and MBMS supported</p> <p>8.2.12.4. SUCI Calculation by default system application – NAI-based SUPI, Profile A</p> <p>8.2.12.5. SUCI Calculation by default system application – NAI-based SUPI, Profile B</p> <p>8.2.12.6. SUCI Calculation by default system application – NAI-based SUPI, Null Scheme</p> <p>Deleted TC:</p> <p>8.2.3.8 Creating a DF with dfLink when eUICC supports dfLink</p> <p>“SIMalliance” changed to “TCA” throughout the document</p>
V3.1.1	2022 February	<p>Section 6.6.4.1 is updated</p> <p>New Section 6.6.4.7 <i>EF (UMPC)</i> is added</p> <p>The applicability of TC 8.2.7.13 and TC 8.2.4.17 is updated</p> <p>Conditional item C063 is updated</p> <p>New conditional item C065 is added</p> <p>The following PE-s are updated:</p> <p>6.14.11.7. PE-SecurityDomain-SSD-5</p> <p>6.14.12.11. PE-Application-11</p> <p>6.14.10.4. PE-SecurityDomain-MNO-SD-4</p> <p>The following PE is added:</p> <p>6.14.11.8. PE-SecurityDomain-SSD-6</p> <p>The following TC-es are updated:</p> <p>TC 8.2.2.5</p> <p>TC 8.2.6.11</p> <p>TC 8.2.6.12</p> <p>TC 8.2.7.13</p> <p>TC 8.2.7.15</p> <p>TC 8.2.11.3</p> <p>TC 8.2.9.3</p> <p>TC 8.2.13.4</p> <p>TC 8.2.13.5</p> <p>TC 8.2.13.6</p>

		Editorial updates and fixes
V3.2	2022 August	<p>The rules at the end of Section 6.2 are updated with rules related to Version 3.2</p> <p>New Test PE-s are defined Test PE-s are updated</p> <p>The following TC-es are updated: 8.2.4.17 8.2.5.10 8.2.6.11 8.2.6.12 8.2.7.15</p> <p>The title of Test Case 8.2.6.11 is changed to: “Check SCP parameters stored in Card Recognition Data when both SCP80 and SCP02 is supported in SSD”</p> <p>The title of Test Case 8.2.6.11 is changed to: “Check SCP parameters stored in Card Recognition Data when SCP80 is supported in SSD”</p> <p>The title of Test Case 8.2.7.16 is changed to : “Check Application PE installed setting the SIM File Access and Toolkit Parameters according to ETSI TS 102.226”</p> <p>The following new TC-es are defined: 8.2.3.31. Installing LTE Files within USIM and ISIM by template 8.2.6.14. Check OTA DNS Personalisation 8.2.6.15. Check SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key 8.2.6.16. Check failure of SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key 8.2.6.17. Check installing PE Security Domain with specific load package and class AID-s 8.2.6.18. Check processData for Security Domain 8.2.6.19 Check Get Data returns correct SCP11-related parameters when SCP11 is supported in SSD 8.2.6.20 Check SCP11 parameters when SCP11c authorization mechanism is supported in SSD 8.2.6.21 Check SCP11 parameters when S16 mode is supported in SSD 8.2.7.17. Check Application PE installed setting UICC System Specific Parameters according to ETSI TS 102.226</p> <p>The response structure of the TC-es are updated.</p>
V3.2.1	2022 December	<p>New normative reference is added in Section 3.1</p> <p>The following Test PEs are updated: 6.14.2.4.7 DF-CUSTOM-by-Generic-File-Management-6 6.14.6.2.4 PE-OPT-ISIM-by-Template-3</p>

		6.14.6.2.5 PE-OPT-ISIM-by-Template-3-v2 6.14.10.5. PE-SecurityDomain-MNO-SD-5 6.14.10.8. PE-SecurityDomain-MNO-SD-8  The following Test Cases are updated: 8.2.6.14 Check OTA DNS Personalisation 8.2.6.16. Check failure of SSD-1 INSTALL [for install] command when MNO-SD is personalized with ETSI DAP Key 8.2.6.17 Check installing PE Security Domain with specific load package and class AID-s
V3.2.2	2023 February	New normative references is added in Section 3.1 Section 6.6.1.2 is updated
V3.2.3	2023 July	Section 6.6.4 is updated with rules for FCP verification Section 6.6.4.8 is added Section 6.9 is updated Some Test PE-s are updated The following TC-es are updated: TC 8.2.1.3. Installing profile with PE-Application before PE-SecurityDomain, eUICC reports error TC 8.2.3.11. Installing ISIM files by template TC 8.2.3.22. Installing ISIM files by version2 template TC 8.2.3.31. Installing LTE Files within USIM and ISIM by template
V3.3.1	2023 September	Section 3.1 is updated New table added in Section 6.1.1 Section 6.2 is updated New Section 6.5.1 is added Section 6.6.1.2 is updated Section 6.14 is updated New REQ-s are added to Section 8.1.x The status of some REQ-s are updated in Section 8.1.x New Section 8.1.12 is added and new REQ-s are defined in this Section REQ-s are added to TC-es Profile Headers are updated to contain minor version 3 New Test PE-s are added The identification of several Test PE-s is updated Some Test PE-s are updated New TC-es added: 8.2.3.32. Installing 5G files by version4 template, SNPN and 5G PROSE files by template 8.2.3.33. Installing OPT USIM files by version3 template 8.2.4.20. Installing PE-CDMAParameters with shortest Mobile IP authentication parameters 8.2.5.12. Checking the update of Global PIN and ADM for IoT Minimal Profile 8.2.5.13. Checking the update of Local PIN for IoT Minimal Profile 8.2.5.14. Checking the default Global PIN1 for IoT Minimal Profile 8.2.5.15. Checking the default Local PIN for IoT Minimal Profile 8.2.6.22. Check PE-SD Installation when CumulativeGrantedMemory is supported



		<p>8.2.11.12. Error when template version is not supported in a mandatory PE MF</p> <p>8.2.11.13. Error when template version is not supported in a non-mandatory PE MF</p> <p>8.2.11.14. Error when template version is not supported in a mandatory PE USIM</p> <p>8.2.11.15. Warning when template version is not supported in a non-mandatory PE USIM</p> <p>8.2.12.7. SUCI Calculation by default system application – IMSI-based SUPI, Profile A, wrong Key Index</p> <p>8.2.12.8. SUCI Calculation by default system application – IMSI-based SUPI, Profile B, wrong Key Index</p> <p>8.2.13.1. Installing IoT Minimal Profile by template</p> <p>8.2.13.2. Installing 5G files in IoT Minimal Profile by template</p> <p>8.2.13.3. Error when the installation of IoT Minimal Profile is not supported</p> <p>8.2.13.4. Installing USIM files by template with OPT-USIM in IoT Minimal Profile</p> <p>8.2.13.5. Installing IoT Minimal Profile containing Generic File Management</p> <p>8.2.13.6. Altering default access rule in IoT Minimal Profile</p> <p>8.2.13.7. Adding additional access rule in IoT Minimal Profile</p> <p>8.2.13.8. Removing default access rule in IoT Minimal Profile</p> <p>8.2.13.9. Changing USIM ef-arr from linked to independent file</p>
V3.3.1.1	2025 January	<p>New normative references are added in Section 3.1</p> <p>The following Sections are updated:</p> <ul style="list-style-type: none"> <li>-Section 6.1.1</li> <li>-Section 6.6.1.2</li> <li>-Section 6.5.1</li> <li>-Section 6.9</li> </ul> <p>New optional features are added in Section 6.1</p> <p>Applicability table is updated (Section 6.2)</p> <p>Conditional items are updated in Table 3</p> <p>New conditional items are added in Table 3</p> <p>New REQ-s are added to Section 8.1.x</p> <p>Some REQ-s are updated in Section 8.1.x</p> <p>New Test PE-s are added</p> <p>Some Test PE-s are updated</p> <p>The following TC-es are updated:</p> <ul style="list-style-type: none"> <li>-TC 8.2.3.32. Installing 5G files by version4 template, SNPN and 5G PROSE files by template</li> <li>-TC 8.2.5.12. Checking the update of Global PIN and ADM for IoT Minimal Profile</li> <li>-TC 8.2.5.13. Checking the update of Local PIN for IoT Minimal Profile</li> <li>-TC 8.2.5.14. Checking the default Global PIN1 for IoT Minimal Profile</li> </ul>

		<p>-TC 8.2.5.15. Checking the default Local PIN for IoT Minimal Profile</p> <p>-TC 8.2.6.22. Check PE-SD Installation when CumulativeGrantedMemory is supported</p> <p>-TC 8.2.7.13. Check the contactlessProtocolParameters (Type A Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected</p> <p>-TC 8.2.11.14 Error when template version is not supported in a mandatory PE USIM</p> <p>New TC-es are added:</p> <p>-TC 8.2.7.18. Check the contactlessProtocolParameters (Type B Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected. is added</p> <p>-TC 8.2.7.19. Check the contactlessProtocolParameters (Type F Protocol) set inside the ApplicationInstance with contactless eUICC Mandatory service selected. is added</p> <p>-TC 8.2.7.20. Check Application PE installed setting the Additional Contactless Parameters (reader mode protocol data Type B) according to the ETSI TS 102.226. is added</p> <p>Editorial changes</p>
V3.3.1.2	2025 February	<p>New normative reference is added in Section 3.1</p> <p>New Test Tool requirement is added in Section 6.5</p> <p>Applicability of TC 8.2.3.31 is updated with a new condition</p>